

A. INTRODUCTION

This chapter provides a discussion of the potential impacts of new vehicle trips associated with the proposed project on the local street network and at key intersections in the study area as well as the effect on parking conditions in the area. The chapter describes existing (2008) and projected (2014) traffic and parking conditions in the future without the proposed project (the “No Action” condition) and the future with the proposed project.

Temporary impacts that could occur during construction resulting from the proposed project are presented in Chapter 20, “Construction Impacts.” The project’s potential impacts to transit and pedestrian facilities are described in Chapter 17, “Transit and Pedestrians.”

PRINCIPAL CONCLUSIONS

The proposed action includes two development scenarios—the Single-Tenant Office Scenario and the Multi-Tenant Office Scenario. Both options include office and retail components, resulting in an increase in the number of vehicle trips into and out of the development site study area. The traffic study area, identified in **Figure 16-1**, extends south from the development site to West 30th Street and north to West 35th Street. In the east-west direction, the study area extends from Eighth Avenue to Madison Avenue. In addition, key intersections along 34th Street—including Ninth Avenue, Park Avenue, Lexington Avenue, Third Avenue, Second Avenue, First Avenue, and the FDR Drive—were analyzed. A total of 43 signalized intersections were selected for detailed traffic impact analysis. These intersections were analyzed for weekday AM, weekday midday, weekday PM, and Saturday midday peak hour conditions.

Existing conditions traffic analysis indicated that although most intersections in the traffic study area operate at overall acceptable levels during the four analysis peak hours, individual approach movements at numerous intersections operate at mid-Level of Service (LOS) D or worse. Overall, of the 145 approach movements analyzed, 27 approach movements at 20 intersections operate at mid-LOS D or worse in the AM peak hour; 18 approach movements at 16 intersections operate at mid-LOS D or worse in the midday peak hour; 23 approach movements at 19 intersections operate at mid-LOS D or worse in the PM peak hour; and 18 approach movements at 17 intersections operate at mid-LOS D or worse in the Saturday midday peak hour. Minimal on-street parking is available in the primary study area, with most on-street parking restricted for commercial vehicles. A survey of off-street parking facilities within ¼ mile of the project site indicated approximately 1,100 spaces available during the weekday midday, a utilization rate of 76% of all spaces.

As detailed in Chapter 2, “Procedural and Analytical Framework,” significant levels of development were assumed within and in the area surrounding the traffic study area for analysis of the 2014 No Action condition. Under the 2014 No Action condition, an additional 8 approach movements during the weekday AM peak hour, 5 approach movements during the weekday midday peak hour, 7 approach movements during the PM peak hour, and 8 approach movements during the Saturday

midday peak hour operate at mid-LOS D or worse compared to the existing 2008 conditions. Off-street parking demand continues to be below the parking supply in the study area.

For the 2014 future with the proposed project Single-Tenant Office Scenario condition, an additional 2 approach movements during the weekday AM peak hour operate at mid-LOS D or worse compared to the 2014 No Action condition. Off-street parking demand continues to be below the parking supply in the study area.

Under the 2014 future with the proposed project Single-Tenant Office Scenario condition, significant adverse traffic impacts were identified for 17 approach movements at 15 intersections during the weekday AM peak hour and 10 approach movements at 9 intersections during the weekday PM peak hour. Off-street parking capacity in the study area is sufficient enough to accommodate the 2014 future with the proposed project parking demand.

For the 2014 future with the proposed project Multi-Tenant Office Scenario condition, an additional 1 approach movement during the weekday midday peak hour, 1 approach movement during the weekday PM peak hour, and 4 approach movements during the Saturday midday peak hour operate at mid-LOS D or worse compared to the 2014 No Action condition. Off-street parking demand continues to be below the parking supply in the study area.

Under the 2014 future with the proposed project Multi-Tenant Office Scenario condition, significant adverse traffic impacts were identified for 9 approach movements at 8 intersections during the weekday AM peak hour, 15 approach movements at 14 intersections during the weekday midday peak hour, 22 approach movements at 18 intersections during the weekday PM peak hour, and 18 approach movements at 18 intersections during the Saturday midday peak hour. Off-street parking capacity in the study area is sufficient enough to accommodate the 2014 future with the proposed project parking demand.

B. METHODOLOGY

OVERVIEW

The planning for a transportation impact study begins with understanding the travel characteristics associated with various components of the proposed project and the roadway network and regional transportation systems surrounding the project area (see **Figure 16-1** for the traffic study area). Depending on the size and anticipated trip generation of the proposed project, various transportation elements may need to be evaluated quantitatively. The determination of analysis needs for projects in New York City is based on guidance outlined in the *City Environmental Quality Review (CEQR) Technical Manual*. Impacts on vehicular flow, parking supply and demand, and vehicle-pedestrian safety are evaluated as part of the “Traffic and Parking” section of an EIS, while those on transit services and pedestrian flow are examined in the “Transit and Pedestrians” section.

Once the analysis needs are determined, a study area is developed for each of the specific transportation elements. At the same time, the appropriate analysis time periods would be determined. Typically, the weekday AM, midday, and PM peak hours are selected as representative peak periods for traffic analysis. To provide the basic parameters for analysis, baseline traffic, parking, transit, and pedestrian data, along with physical and operational characteristics, are collected for use in developing the baseline conditions, often referred to as the “existing conditions.” Once the basic analysis parameters have been established, operating levels for each of the transportation analysis areas would be determined.

The No Action condition builds on the existing conditions analysis by incorporating background growth, other nearby projects expected to be completed, and any anticipated changes in the transportation network. Again, operating levels would be computed. The analysis results would become the future baseline onto which projected increments associated with the proposed project would be layered to formulate the “future with the proposed project conditions.”

For the development site, it is expected that if the proposed actions are not approved, the project sponsor will develop the 15 Penn Plaza site under existing C6-6 and C6-4.5 zoning (an as-of-right or No Action building). This as-of-right building will consist of approximately 1.6 million gross square feet (gsf) (1.15 million zoning square feet [zsf]) of which approximately 1.3 million gsf will be office use, 40,600 gsf will be retail use, 202,000 gsf will be mechanical space, and 35,438 gsf will be lobby area and amenity space (see Table 16-1). Accessory parking for up to 100 vehicles would be located below grade.

**Table 16-1
No Action Building Program**

Project Components	As-of-Right Zoning	
	zsf	gsf
Commercial Office	1,078,867	1,319,914
Retail	37,587	40,600
Mechanical Space		202,000
Lobby Area, Amenity Space, Service and Loading Areas	32,546	35,438
Total Building Square Footage	1,149,000	1,597,952
Note:	The No <u>Action</u> building program would include up to 100 accessory parking spaces in place of a portion of the below-grade service area.	
Source:	Pelli Clarke Pelli Architects.	

For purposes of the traffic and parking analyses, the 2014 No Action condition incorporates the demolition of the existing 1,700-room Hotel Pennsylvania and the construction of the above as-of-right office building. In addition to the hotel uses within the Hotel Pennsylvania, the development site contains additional commercial uses, including approximately 46,400 gross square feet (gsf) of ground-floor retail space with frontage on Seventh Avenue and on West 32nd and West 33rd Streets. Trips generated by the existing hotel were removed from the transportation network and trips generated by the as-of-right office building were added.

The future with the proposed project traffic and parking analyses represent the incremental impact of the project compared with the as-of-right office building discussed above. If the future with the proposed project analyses conclude that the proposed project would result in significant transportation-related adverse impacts, as defined by the CEQR Technical Manual, mitigation measures would be explored to alleviate these impacts.

STUDY AREA

CEQR Technical Manual guidelines suggest that intersections through which 50 or more project-generated vehicles may be expected to travel during peak periods should be analyzed as the basis for determining project impacts. To identify the scale of the traffic study area and proposed traffic analysis locations, project-generated weekday vehicle trips were assigned to the Manhattan roadway network and the projected number of project-generated vehicle trips that would travel through each intersection was summarized for reasonable worst-case conditions. Specific traffic study locations were then selected through coordination with the New York City Department of City Planning (DCP) and the New York City Department of Transportation (NYCDOT).

The traffic study area, identified in **Figure 16-1**, extends south from the development site to West 30th Street and north to West 35th Street. In the east-west direction, the study area extends from Eighth Avenue to Madison Avenue. In addition, key intersections along 34th Street—including Ninth Avenue, Park Avenue, Lexington Avenue, Third Avenue, Second Avenue, First Avenue, and the FDR Drive—were analyzed. The total study area includes 43 signalized intersections for analysis.

PEAK HOURS FOR ANALYSIS

Hour-by-hour estimates of the vehicular trips likely to be generated by the proposed project indicate that trip generation would be greatest in the traditional weekday AM, midday, and PM peak traffic hours: 8 to 9 AM, 12 to 1 PM, and 5 to 6 PM. These hours, therefore, were selected for analysis of weekday traffic conditions. Weekend vehicular activity expected to be generated by the proposed project, while less peaked and lower in total volume than weekday trip generation, could result in traffic impacts as well. For this reason, the Saturday midday 1 to 2 PM period was also selected for analysis.

OPERATIONAL ANALYSIS METHODOLOGY

SIGNALIZED INTERSECTION CAPACITY ANALYSIS


The operation of signalized intersections in the study area was analyzed in accordance with CEQR guidelines by applying the methodologies presented in the 2000 Highway Capacity Manual (HCM). This procedure evaluates signalized intersections for average delay per vehicle and LOS.

LOS for the signalized intersections is based on the average stopped delay per vehicle for the various lane group movements within the intersection. This delay is the basis for an LOS determination for individual lane groups (grouping of movements in one or more travel lanes), the approaches, and the overall intersection. The levels of service are defined in **Table 16-2**.

**Table 16-2
LOS Criteria for Signalized Intersections**

Level of Service	Average Delay
A	≤ 10.0 seconds
B	> 10.0 and ≤ 20.0 seconds
C	> 20.0 and ≤ 35.0 seconds
D	> 35.0 and ≤ 55.0 seconds
E	> 55.0 and ≤ 80.0 seconds
F	> 80.0 seconds
Source: Transportation Research Board, <i>Highway Capacity Manual</i> , 2000.	

Although the HCM methodology calculates a volume-to-capacity (v/c) ratio, there is no strict relationship between v/c ratios and LOS as defined in the HCM. A high v/c ratio indicates substantial traffic passing through an intersection, but a high v/c ratio combined with low average delay actually represents the most efficient condition in terms of traffic engineering standards, where an approach or the whole intersection processes traffic close to its theoretical maximum with minimal delay. However, very high v/c ratios, especially those approaching or greater than 1.0, are often correlated with a deteriorated LOS. Other important variables affecting delay include cycle length, progression, and green time. LOS A and B indicate good operating conditions with minimal delay. At LOS C, the number of vehicles stopping is higher, but congestion is still fairly light. LOS D describes a condition where congestion levels are more noticeable and individual cycle failures (a condition where motorists may have to wait for more than one green phase to clear the intersection)

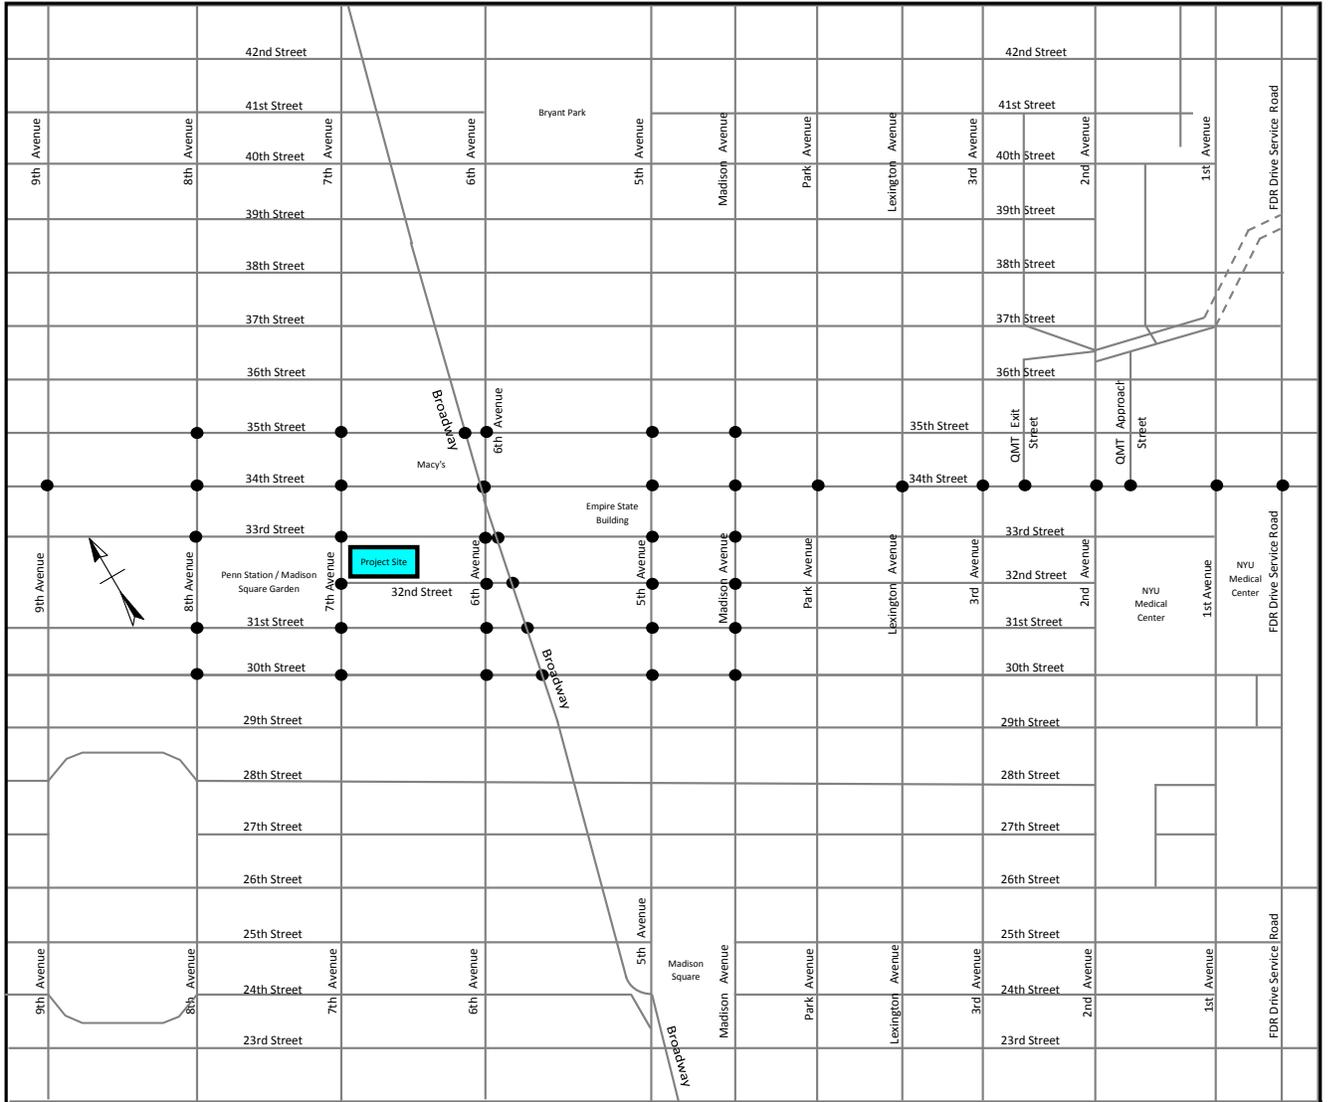

- Project Site
- Analysis Intersections

15 PENN PLAZA

Traffic Study Area
Figure 16-1

can occur. The mid-point of this service level (45 seconds of delay) is considered the threshold of acceptable operating conditions. Conditions at LOS E and F reflect poor service levels, and cycle failures are frequent. The HCM methodology provides for a summary of the total intersection operating conditions by identifying the two critical movements (the worst-case from each roadway) and calculating a summary of critical v/c ratio, delay, and LOS.

SIGNIFICANT IMPACT CRITERIA

According to the criteria presented in the *CEQR Technical Manual*, impacts are considered significant and require examination of mitigation if they result in an increase of 5 or more seconds of delay in a lane group over No Action levels beyond mid-LOS D. For No Action LOS E, a 4-second increase in delay is considered significant. For No Action LOS F, a 3-second increase in delay is considered significant. However, if the No Action LOS F condition already corresponds with a delay in excess of 120 seconds, an increase of 1.0 or more seconds of delay is considered significant. In addition, impacts are considered significant if levels of service deteriorate from acceptable A, B, or C in the No Action condition to marginally unacceptable LOS D (a delay in excess of 45 seconds, the midpoint of LOS D), or unacceptable LOS E or F in the future with the proposed project condition. The above sliding scale is applicable only if the proposed project is expected to generate five or more vehicle trips through the analysis intersection during the peak hour being examined.

TRANSPORTATION PLANNING FACTORS

The approach used to determine trip generation is similar to that followed in most transportation impact studies under *CEQR Technical Manual* guidelines. That is, relevant sources were utilized to prepare specific estimates of the number of people that would be entering and exiting the various development program elements (office, retail, hotel, residential, etc.). These estimates focus on peak periods when the maximum levels of activity would occur, thereby creating the greatest potential for impacts. The total number of daily person-trips (the number of entering and exiting people) is then converted into peak hour trips by applying the percent of the daily total occurring in individual hours of the day; this percentage of trips over time is called the temporal distribution. For the proposed project, examining the weekday morning, midday, and late afternoon peak hours conservatively encompasses those time periods when future activities attributed to the proposed actions would be the greatest.

The estimates of people arriving and leaving during a peak hour are then distributed to the various means of available transportation. This distribution is referred to as the modal split. For most land uses in the West Midtown area of Manhattan, public transportation (specifically the Metropolitan Transportation Authority-Long Island Rail Road (LIRR), New Jersey Transit, Amtrak, subway, bus, and Port Authority Trans-Hudson [PATH]) is the predominant mode for trips to and from the area. However, during the midday, the vast majority of trips are made on foot, many of which are associated with local lunch hour trips. For trips made by automobiles or taxis, person-trip estimates are translated into vehicle trips by applying average vehicle occupancy rates in order to determine vehicle trips generated by each land use type.

The trip estimates are adjusted for “linkages,” which is the assumption of interconnected uses. For example, there is an assumption that employees in the office space, guests in the hotel, and riders from the LIRR, NJ Transit, Amtrak, PATH, and the subway will, in part, be the source of shoppers for the retail space. This condition of linkage between the uses is accounted for by reducing the number of trips to a given program element. The purpose of this adjustment, which

varies depending upon the character of the use, is to avoid double-counting people who visit more than one of the components on the project site.

A variety of sources were consulted in developing the transportation planning travel characteristics used in this DEIS. These sources include standard references such as the *CEQR Technical Manual*; Boris Pushkarev and Jeffrey Zupan’s *Urban Space for Pedestrians*; the Institute of Transportation Engineers’ *Trip Generation, Seventh Edition*; and a number of relevant studies, particularly the *No. 7 Subway Extension—Hudson Yards Rezoning and Development Program Final Generic Environmental Impact Statement, November 2004 (Hudson Yards FGEIS)*.

As detailed below, the trip generation estimates show the future demand with and without the proposed project for various components of the project site. Traffic volume projections follow standard procedures for a development project in New York City, in accordance with the guidelines presented in the *CEQR Technical Manual*.

Table 16-3 below compares the project components for each of the two development scenarios – the Single-Tenant Office Scenario and the Multi-Tenant Office Scenario. The retail component for the Single-Tenant Office Scenario is projected to be local retail (attracting trips from the nearby neighborhoods), while the retail component for the Multi-Tenant Office Scenario is projected to be destination retail (attracting trips from a wider geographic area).

Table 16-3
Proposed Building Program—Single-Tenant Office and Multi-Tenant Office Scenarios

Project Components	Single-Tenant Office Scenario		Multi-Tenant Office Scenario	
	zsf	gsf	zsf	gsf
Commercial Office	1,396,481	1,534,594	1,723,371	1,893,814
Trading Floor Component	310,180	340,857	0	0
Retail	11,126	18,266	296,392	361,711 ¹
Dedicated Mechanical Floors	0	418,395	0	307,180
Lobby Area, Amenity Space, and Back of House	334,880	509,071	32,904	97,131
Total	2,052,667	2,821,183	2,052,667	2,659,836
Notes:	*Proposed Program could include up to 100 accessory parking spaces. zsf = zoning square feet; gsf = gross square feet. 1. In the Multi-Tenant Office Scenario, up to <u>194,442 zsf (or 211,941 gsf)</u> of this retail space could be utilized for trading uses.			
Source:	Pelli Clarke Pelli Architects.			

As discussed above, the traffic and parking analyses detailed in this chapter represent the incremental impact of the proposed building program to the as-of-right building.

Transportation planning travel characteristics were developed for specific land uses, as discussed in Appendix C, Transportation Planning Assumptions, and summarized in **Table 16-4**. Travel characteristics were developed for the following land use categories:

- Office
- Trading Floor
- Local Retail
- Destination Retail

**Table 16-4
Transportation Planning Assumptions**

Land Use Trip Generation	Office per 1000 SF		Trading Floor per day		Local Retail per 1000 SF		Destination Retail per 1000 SF	
	(6) Weekday	(8) Saturday	(2, 4) Weekday	(2, 4) Saturday	(10, 11) Weekday	(11, 12) Saturday	(6, 11) Weekday	(11, 13) Saturday
Daily Person Trips	18.0	3.87	7125	0	205	240	159	185
Net Daily Person Trips	18.0	3.87	7125	0	154	180	119	139
Temporal Distribution	(1, 14)		(5, 16)		(6, 7)		(6, 13)	
AM (8-9)	11.8%		37.8%		3.1%		0.0%	
MD (12-1)	15.0%		0.0%		19.0%		9.5%	
PM 5-6)	13.7%		35.0%		9.6%		9.8%	
SAT (1-2 PM)	14.7%		0.0%		9.5%		9.9%	
In / Out Directional Split	(1, 14)		(5)		(6)		(6, 13)	
	In	Out	In	Out	In	Out	In	Out
AM (8-9)	96%	4%	100%	0%	50%	50%	0%	0%
MD (12-1)	48%	52%	0%	0%	50%	50%	55%	45%
PM 5-6)	5%	95%	0%	100%	50%	50%	47%	53%
SAT (1-2 PM)	57%	43%	0%	0%	50%	50%	52%	48%
Modal Split	(9)	(6)	(9)	(6)	(6)	(3, 6)		
	AM / PM	MD / SAT	AM / PM	MD / SAT	ALL	PM	MD / SAT	
Auto	10.2%	1.5%	10.2%	1.5%	2.0%	9.0%	9.0%	
Taxi	1.0%	3.0%	1.0%	3.0%	3.0%	4.0%	4.0%	
Bus	12.9%	5.0%	12.9%	5.0%	6.0%	8.0%	8.0%	
Subway	47.3%	6.0%	47.3%	6.0%	6.0%	26.5%	20.0%	
Railroad	25.1%	1.5%	25.1%	1.5%	0.0%	2.0%	0.0%	
Walk	3.2%	83.0%	3.2%	83.0%	83.0%	50.5%	59.0%	
Other	0.1%	0.0%	0.1%	0.0%	0.0%	0.0%	0.0%	
Work at Home	0.2%	0.0%	0.2%	0.0%	0.0%	0.0%	0.0%	
	100.00%	100.0%	100.00%	100.0%	100.00%	100.00%	100.0%	
Vehicle Occupancy	(6)		(6)		(6)		(6)	
Auto	1.65		1.65		1.65		2.00	
Taxi	1.40		1.40		1.40		2.00	
Truck Trip Generation	(6)	(7)	(6)	(7)	(6)	(7)	(6)	(15)
	Weekday	Saturday	Weekday	Saturday	Weekday	Saturday	Weekday	Saturday
Daily Vehicle Trips	0.16	0.01	0.16	0.01	0.35	0.02	0.35	0.02
Temporal Distribution	(7)		(7)		(6, 7)		(6, 15)	
AM (8-9)	7.0%		7.0%		7.7%		7.7%	
MD (12-1)	7.0%		7.0%		11.0%		11.0%	
PM 5-6)	3.0%		3.0%		1.0%		1.0%	
SAT (1-2 PM)	11.0%		11.0%		11.0%		11.0%	
In / Out	In	Out	In	Out	In	Out	In	Out
	50%	50%	50%	50%	50%	50%	50%	50%

Sources:

- (1) Pushkarev & Zupan, "Urban Space for Pedestrians," 1975.
- (2) New York Stock Exchange New Facility EIS, 1999.
- (3) Farley/Moynihan West FEIS, 2006, Table 13-1
- (4) Assumes 750 traders per floor and five floors with 95% daily attendance and two trips per person per day
- (5) Assumes negligible trips during the midday peak hour
- (6) No. 7 Subway Extension - Hudson Yards Rezoning and Development Program FGEIS, 2004.
- (7) Atlantic Yards and Arena Redevelopment FEIS, 2006
- (8) ITE Trip Generation, 7th Edition, Land Use Code 710: General Office Building Ratio of Weekday to Saturday Trip Generation Rates
- (9) Hudson Yards FGEIS, Appendix S-1 Updated by NYCDOT, NYCDOT and NYCT Working Group
- (10) City Environmental Quality Review (CEQR) Technical Manual, Appendix 3, 2001
- (11) Assumes 25% linked trips for retail uses as per No. 7 Subway Extension - Hudson Yards Rezoning and Development Program FGEIS, 2004.
- (12) ITE Trip Generation, 7th Edition, Land Use Code 851: Convenience Retail Ratio of Weekday to Saturday Trip Generation Rates
- (13) ITE Trip Generation, 7th Edition, Land Use Code 820: Shopping Center Ratio of Weekday to Saturday Trip Generation Rates
- Directional distribution based upon Saturday peak hour of the generator
- (14) ITE Trip Generation, 7th Edition, Land Use Code 710: General Office Building Ratio of Saturday Peak Hour Trip Generation Rate to Saturday Daily Rate.
- Directional distribution based upon Saturday peak hour of the generator
- (15) Assumes same Saturday truck trip generation rate as local retail.
- (16) Based on April 1997 survey of NYSE traders and staff

TRIP GENERATION

Trip generation was calculated for the proposed project for both the Single-Tenant Office Scenario and the Multi-Tenant Office Scenario. The total person trips projected for each of these scenarios is presented in Tables 16-5 and 16-6. A comparison of person trip levels was made between the two scenarios and it was determined that the Single-Tenant Office Scenario would generate more person trips during the weekday AM peak period, while the Multi-Tenant Office Scenario would generate more person trips during the weekday midday, weekday PM, and Saturday midday peak periods. For traffic and parking analyses, both the Single-Tenant Office Scenario and the Multi-Tenant Office Scenario were analyzed.

**Table 16-5
Future with the Proposed Project – Single-Tenant Office Scenario
Incremental Peak Hour Person Trips Generated By Mode**

LAND USE		AM Peak Hour							MD Peak Hour								
		Auto	Taxi	Bus	Subway	Railroad	Walk	Other	Total	Auto	Taxi	Bus	Subway	Railroad	Walk	Other	Total
Office	In	45	4	56	207	110	14	1	437	4	8	14	17	4	231	0	278
	Out	2	1	2	9	5	1	0	20	5	9	15	18	5	250	0	302
	Total	47	5	58	216	115	15	1	457	9	17	29	35	9	481	0	580
Trading Floor	In	275	27	347	1,274	676	86	8	2,693	0	0	0	0	0	0	0	0
	Out	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Total	275	27	347	1,274	676	86	8	2,693	0	0	0	0	0	0	0	0
Local Retail	In	-1	-2	-3	-3	0	-44	0	-53	-7	-10	-20	-20	0	-271	0	-328
	Out	-1	-2	-3	-3	0	-44	0	-53	-7	-10	-20	-20	0	-271	0	-328
	Total	-2	-4	-6	-6	0	-88	0	-106	-14	-20	-40	-40	0	-542	0	-656
Destination Retail	In																
	Out																
	Total																
Total Trips	In	319	29	400	1,478	786	56	9	3,077	-3	-2	-6	-3	4	-40	0	-50
	Out	1	-1	-1	6	5	-43	0	-33	-2	-1	-5	-2	5	-21	0	-26
	Total	320	28	399	1,484	791	13	9	3,044	-5	-3	-11	-5	9	-61	0	-76

LAND USE		PM Peak Hour							SAT Peak Hour								
		Auto	Taxi	Bus	Subway	Railroad	Walk	Other	Total	Auto	Taxi	Bus	Subway	Railroad	Walk	Other	Total
Office	In	3	0	3	13	7	1	0	27	7	1	9	32	17	2	0	68
	Out	51	5	65	238	126	16	2	503	6	1	7	27	14	2	0	57
	Total	54	5	68	251	133	17	2	530	13	2	16	59	31	4	0	125
Trading Floor	In	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Out	254	25	322	1,180	626	80	7	2,494	0	0	0	0	0	0	0	0
	Total	254	25	322	1,180	626	80	7	2,494	0	0	0	0	0	0	0	0
Local Retail	In	-3	-5	-10	-10	0	-137	0	-165	-4	-6	-11	-11	0	-158	0	-190
	Out	-3	-5	-10	-10	0	-137	0	-165	-4	-6	-11	-11	0	-158	0	-190
	Total	-6	-10	-20	-20	0	-274	0	-330	-8	-12	-22	-22	0	-316	0	-380
Destination Retail	In																
	Out																
	Total																
Total Trips	In	0	-5	-7	3	7	-136	0	-138	3	-5	-2	21	17	-156	0	-122
	Out	302	25	377	1,408	752	-41	9	2,832	2	-5	-4	16	14	-156	0	-133
	Total	302	20	370	1,411	759	-177	9	2,694	5	-10	-6	37	31	-312	0	-255

Table 16-6
Future with the Proposed Project – Multi-Tenant Office Scenario
Incremental Peak Hour Person Trips Generated By Mode

LAND USE		AM Peak Hour								MD Peak Hour							
		Auto	Taxi	Bus	Subway	Railroad	Walk	Other	Total	Auto	Taxi	Bus	Subway	Railroad	Walk	Other	Total
Office	In	119	12	151	554	294	37	3	1,170	11	22	37	45	11	617	0	744
	Out	5	0	6	23	12	2	0	49	12	24	40	48	12	669	0	806
	Total	124	12	157	577	306	39	3	1,218	23	46	77	93	23	1,286	0	1,550
Trading Floor	In																
	Out																
	Total																
Local Retail	In	-2	-3	-6	-6	0	-80	0	-97	-12	-18	-36	-36	0	-493	0	-594
	Out	-2	-3	-6	-6	0	-80	0	-97	-12	-18	-36	-36	0	-493	0	-594
	Total	-4	-6	-12	-12	0	-161	0	-194	-24	-36	-71	-71	0	-986	0	-1,188
Destination Retail	In	0	0	0	0	0	0	0	0	201	89	179	447	0	1,317	0	2,233
	Out	0	0	0	0	0	0	0	0	167	74	149	371	0	1,095	0	1,857
	Total	0	0	0	0	0	0	0	0	368	164	327	818	0	2,413	0	4,089
Total Trips	In	117	9	145	548	294	-43	3	1,073	200	94	180	456	11	1,442	0	2,382
	Out	3	-2	0	17	12	-79	0	-48	167	81	153	384	12	1,271	0	2,068
	Total	120	7	145	565	306	-122	3	1,025	367	175	333	840	23	2,713	0	4,450

LAND USE		PM Peak Hour								SAT Peak Hour							
		Auto	Taxi	Bus	Subway	Railroad	Walk	Other	Total	Auto	Taxi	Bus	Subway	Railroad	Walk	Other	Total
Office	In	7	1	9	33	18	2	0	71	18	2	23	85	45	6	1	180
	Out	137	13	173	636	337	43	3	1,343	16	2	20	72	38	5	1	154
	Total	144	14	183	669	355	45	3	1,414	34	3	43	158	84	11	2	334
Trading Floor	In																
	Out																
	Total																
Local Retail	In	-6	-9	-18	-18	0	-249	0	-300	-7	-10	-21	-21	0	-288	0	-347
	Out	-6	-9	-18	-18	0	-249	0	-300	-7	-10	-21	-21	0	-288	0	-347
	Total	-12	-18	-36	-36	0	-498	0	-600	-14	-21	-42	-42	0	-576	0	-694
Destination Retail	In	177	79	157	521	39	994	0	1,967	245	109	217	543	0	1,603	0	2,717
	Out	203	90	180	596	45	1,137	0	2,251	203	90	181	452	0	1,334	0	2,261
	Total	380	169	337	1,117	84	2,131	0	4,218	448	199	398	996	0	2,937	0	4,978
Total Trips	In	178	70	148	537	57	747	0	1,737	256	100	220	608	45	1,321	1	2,550
	Out	334	94	336	1,214	382	931	3	3,295	212	82	180	504	38	1,050	1	2,067
	Total	512	164	484	1,751	439	1,678	3	5,032	468	182	400	1,112	83	2,371	2	4,617

The number of peak hour vehicle trips that would be generated in 2014 by the Single-Tenant Office Scenario and Multi-Tenant Office Scenario are summarized in **Tables 16-7 and 16-8**, respectively. The Single-Tenant Office Scenario generates the most vehicle trips during the AM peak hour, while the Multi-Tenant Office Scenario generates the most vehicle trips during the midday, PM, and Saturday peak hours.

**Table 16-7
Future with the Proposed Project – Single-Tenant Office Scenario
Incremental Peak Hour Vehicle Trips Generated By Type**

LAND USE		AM Peak Hour					MD Peak Hour				
		Auto	Truck	Taxi	Balanced Taxi	Total	Auto	Truck	Taxi	Balanced Taxi	Total
Office	In	27	1	3	-	31	3	1	6	-	10
	Out	1	1	0	-	2	3	1	6	-	10
	Total	28	2	3	-	33	6	2	12	-	20
Trading Floor	In	166	2	19	-	187	0	2	0	-	2
	Out	0	2	0	-	2	0	2	0	-	2
	Total	166	4	19	-	189	0	4	0	-	4
Local Retail	In	-1	0	-1	-	-2	-4	0	-7	-	-11
	Out	-1	0	-1	-	-2	-4	0	-7	-	-11
	Total	-2	0	-2	-	-4	-8	0	-14	-	-22
Destination Retail	In				-	0				-	0
	Out				-	0				-	0
	Total				-	0				-	0
Total Trips	In	192	3	21	21	216	-1	3	-1	0	2
	Out	0	3	-1	21	24	-1	3	-1	0	2
	Total	192	6	20	42	240	-2	6	-2	0	4

LAND USE		PM Peak Hour					SAT Peak Hour				
		Auto	Truck	Taxi	Balanced Taxi	Total	Auto	Truck	Taxi	Balanced Taxi	Total
Office	In	2	1	0	-	3	4	0	1	-	5
	Out	31	1	4	-	36	4	0	1	-	5
	Total	33	2	4	-	39	8	0	2	-	10
Trading Floor	In	0	2	0	-	2	0	0	0	-	0
	Out	154	2	18	-	174	0	0	0	-	0
	Total	154	4	18	-	176	0	0	0	-	0
Local Retail	In	-2	0	-4	-	-6	-2	0	-4	-	-6
	Out	-2	0	-4	-	-6	-2	0	-4	-	-6
	Total	-4	0	-8	-	-12	-4	0	-8	-	-12
Destination Retail	In				-	0				-	0
	Out				-	0				-	0
	Total				-	0				-	0
Total Trips	In	0	3	-4	18	21	2	0	-3	0	2
	Out	183	3	18	18	204	2	0	-3	0	2
	Total	183	6	14	36	225	4	0	-6	0	4

Table 16-8
Future with the Proposed Project – Multi-Tenant Office Scenario
Incremental Peak Hour Vehicle Trips Generated by Type

LAND USE		AM Peak Hour					MD Peak Hour				
		Auto	Truck	Taxi	Balanced Taxi	Total	Auto	Truck	Taxi	Balanced Taxi	Total
Office	In	72	3	8	-	83	7	3	16	-	26
	Out	3	3	1	-	7	7	3	17	-	27
	Total	75	6	9	-	90	14	6	33	-	53
Trading Floor	In	0	0	0	-	0	0	0	0	-	0
	Out	0	0	0	-	0	0	0	0	-	0
	Total	0	0	0	-	0	0	0	0	-	0
Local Retail	In	-1	-1	-2	-	-4	-7	-1	-13	-	-21
	Out	-1	-1	-2	-	-4	-7	-1	-13	-	-21
	Total	-2	-2	-4	-	-8	-14	-2	-26	-	-42
Destination Retail	In	0	5	0	-	5	100	7	45	-	152
	Out	0	5	0	-	5	84	7	37	-	128
	Total	0	10	0	-	10	184	14	82	-	280
Total Trips	In	71	7	6	6	84	100	9	48	67	176
	Out	2	7	-1	6	15	84	9	41	67	160
	Total	73	14	5	12	99	184	18	89	134	336

LAND USE		PM Peak Hour					SAT Peak Hour				
		Auto	Truck	Taxi	Balanced Taxi	Total	Auto	Truck	Taxi	Balanced Taxi	Total
Office	In	4	2	1	-	7	11	1	1	-	13
	Out	83	2	10	-	95	9	1	1	-	11
	Total	87	4	11	-	102	20	2	2	-	24
Trading Floor	In	0	0	0	-	0	0	0	0	-	0
	Out	0	0	0	-	0	0	0	0	-	0
	Total	0	0	0	-	0	0	0	0	-	0
Local Retail	In	-4	0	-6	-	-10	-4	0	-7	-	-11
	Out	-4	0	-6	-	-10	-4	0	-7	-	-11
	Total	-8	0	-12	-	-20	-8	0	-14	-	-22
Destination Retail	In	89	1	39	-	129	122	1	54	-	177
	Out	101	1	45	-	147	102	1	45	-	148
	Total	190	2	84	-	276	224	2	99	-	325
Total Trips	In	89	3	34	62	154	129	2	48	65	196
	Out	180	3	49	62	245	107	2	39	65	174
	Total	269	6	83	124	399	236	4	87	130	370

C. 2008 EXISTING CONDITIONS

The proposed project's traffic study area extends south from the development site to West 30th Street and north to West 35th Street. In the east-west direction, the study area extends from Eighth Avenue to Madison Avenue. In addition, key intersections along 34th Street—including Ninth Avenue, Park Avenue, Lexington Avenue, Third Avenue, Second Avenue, First Avenue, and the FDR Drive—were analyzed. The total study area includes 43 signalized intersections for analysis. Several intersections overlap the traffic study area for the Western Rail Yard FEIS.

The base year traffic conditions described in this section represent 2008 traffic volumes. An extensive data collection program, including automatic traffic recorder (ATR) counts, manual turning movement and vehicle classification counts, travel time and delay surveys, and an inventory of roadway geometry and intersection signal timing, was undertaken in October 2008.

ROADWAY CHARACTERISTICS

In the grid street network, avenues extend in a north-south direction and the cross-streets extend east-west. The north-south avenues are generally high-capacity arterials that serve substantial volumes of through and local traffic and are benefited by traffic signal timing patterns that allow traffic to proceed with good progression when traffic conditions are uncongested. Avenues are typically 60 to 70 feet wide curb-to-curb, with sidewalks ranging from 15 to 20 feet in width.

Streets generally run east-west (crosstown), most carrying one-way traffic with curb-to-curb widths varying from 30 to 34 feet and sidewalks that range from 11 to 15 feet in width. Even-numbered streets generally serve eastbound traffic, while odd-numbered streets serve westbound traffic. The only exception within the study area is West 34th Street, which carries two-way traffic and has a curb-to-curb width of about 54 feet and a sidewalk width of 20 to 24 feet. Additionally, West 34th Street has an exclusive bus lane in operation, which is discussed in further detail below.

Exceptions to the general grid are Broadway and West 32nd Street. Broadway is a southbound street that is located diagonal to the grid system. Broadway intersects Sixth Avenue south of West 34th Street, and it intersects Fifth Avenue north of West 23rd Street. West 32nd Street extends east-west, but is interrupted by the "superblocks" located between each avenue from Seventh to Tenth Avenues from West 31st Street to West 33rd Street. These superblocks support Madison Square Garden and the Farley Complex, among other uses.

All 43 analysis intersections are controlled by pre-timed traffic signals and operate with a 90-second cycle length. Broadway crosses West 34th Street and Sixth Avenue at a complex six-legged intersection with four moving approaches, which requires multiple traffic signal timing-plans to keep traffic flowing throughout the day.

SPECIAL STUDY AREA STREET OPERATIONS

Along several corridors in the study area, street space is reserved for the exclusive use of certain vehicles, non-motorized transportation, or pedestrians. NYCDOT has developed programs to enhance mobility by transit and bicycle city-wide, and has implemented several significant projects in the study area. Exclusive bus lanes have recently been installed on West 34th Street. The curb lane in each direction is designated as a bus-only lane from Eleventh Avenue to First Avenue, with varying cross sections and hours of operation by project segment. From Ninth Avenue to Third Avenue, a total of three lanes westbound and two lanes eastbound are provided with the curb lane restricted to buses only weekdays from 7 AM to 7 PM. Except by buses, left

turns are generally prohibited from Ninth Avenue to Third Avenue during weekdays. Also, the curb lanes on 42nd Street are reserved for buses only from Dyer Avenue to Park Avenue during weekday AM and PM peak periods.

Bicycle lanes have been installed on several corridors in the study area. Northbound Class 2 Bicycle Lanes (on-street striped route) are in place on Eighth Avenue extending from south of the study area to West 39th Street and on Sixth Avenue south of West 42nd Street.

Broadway Boulevard extends on Broadway from West 42nd Street to West 35th Street and includes a pedestrian plaza area installed in the roadbed along the east side of Broadway with planters and furniture, plus a Class 1 Bicycle Path. Two southbound lanes plus turn lanes are available for traffic within this segment of Broadway.

TRUCK ROUTES

The City of New York has regulations that restrict trucks to local and through truck routes plus other area-wide restrictions in effect in parts of West Midtown. The City defines a truck as “a vehicle which is designed for transportation of property, which has either of the following characteristics: two axles and six tires; or three or more axles.”

Through trucks are defined as having “neither an origin nor a destination within the Borough of Manhattan.” In the study area, through trucks are restricted to the following routes:

- West 34th Street east of Dyer Avenue (excluding the period from 11 AM to 6 PM).

Local truck routes are designated routes for trucks that are “intended for the purpose of delivery, loading, or providing service within the Borough of Manhattan.” Generally, trucks must travel on local truck routes up to the nearest intersection to their destination. Designated local truck routes in the study area are as follows:

- Sixth Avenue;
- Seventh Avenue south of West 31st Street;
- Eighth Avenue;
- Ninth Avenue;
- Broadway south of West 31st Street;
- West 30th Street from Broadway to Eleventh Avenue;
- 31st Street from Third Avenue to Tenth Avenue; and
- 34th Street east of Dyer Avenue (11 AM to 6 PM).

Restrictions of all entering trucks or trucks having an overall length of 33 feet or more are also in effect weekdays during specified hours in designated sub-areas within the traffic study area.

STUDY AREA ROADWAYS AND PEAK HOUR TRAFFIC VOLUMES

EIGHTH AVENUE

Eighth Avenue is a northbound arterial roadway with four to six lanes of moving traffic, depending on parking regulations. Between West 31st and West 33rd Streets, Eighth Avenue runs along the east side of the Farley building and along the west side of the current Madison Square Garden and Pennsylvania (Penn) Station. A taxi stand is located on the east side of Eighth Avenue just south of West 33rd Street, at Penn Station. Within the study area, there are five analysis locations on Eighth Avenue. On weekdays within the traffic study area, Eighth

Avenue generally carries 1,400 to 1,500 vehicles per hour (vph) during the AM peak hour, 1,400 to 1,600 vph during the midday peak hour, 1,400 to 1,700 vph during the PM peak hour, and 1,300 to 1,500 vph during the Saturday midday peak hour.

SEVENTH AVENUE

Seventh Avenue is a southbound arterial roadway with four lanes of moving traffic. Within the study area, there are six analysis locations on Seventh Avenue. Within the traffic study area, Seventh Avenue is the location of the main entrance to 15 Penn Plaza. At Seventh Avenue, West 32nd Street continues eastbound, and many buses make left turns from Seventh Avenue onto West 32nd Street, since this block of West 32nd Street serves as a final stop and layover location for some Metropolitan Transportation Authority-New York City Transit (NYCT) bus routes. On weekdays within the traffic study area, Seventh Avenue generally carries 1,500 to 1,700 vph during the AM peak hour, 1,200 to 1,600 vph during the midday peak hour, 1,300 to 1,700 vph during the PM peak hour, and 1,200 to 1,400 vph during the Saturday midday peak hour.

SIXTH AVENUE

Sixth Avenue is a northbound arterial roadway and generally operates with four lanes of moving traffic, with parking on the west side of the street between West 31st and West 32nd Streets, as well as a bike lane. Within the study area, there are six analysis locations on Sixth Avenue, which includes the Herald Square area and the convergence of Sixth Avenue and Broadway south of West 34th Street. North of West 32nd Street, the bike lane continues, but the parking lane becomes a no standing zone. On weekdays within the traffic study area, Sixth Avenue generally carries 1,600 to 1,800 vph during the AM peak hour, 1,400 to 1,600 vph during the midday peak hour, 1,400 to 1,600 vph during the weekday PM peak hour, and 1,600 to 1,800 vph during the Saturday midday peak hour.

BROADWAY

Broadway is a southbound arterial roadway with generally two to three moving lanes and parking activities on curb lanes. Within the study area, there are six analysis locations on Broadway. On weekdays, Broadway carries between 500 and 600 vph during the AM peak hour, 500 to 700 vph during the midday peak hour, 500 to 700 vph during the weekday PM peak hour, and 400 to 500 vph during the Saturday midday peak hour.

FIFTH AVENUE

Fifth Avenue is a southbound arterial roadway with generally three moving lanes and parking activities on curb. There is an exclusive bus lane on the west side of the street between 42nd Street and 34th Street. Within the study area, there are six analysis locations on Fifth Avenue. On weekdays within the traffic study area, Fifth Avenue generally carries 1,300 to 1,500 vph during the AM peak hour, 1,200 to 1,400 vph during the midday peak hour, 1,200 to 1,300 vph during the PM peak hour, and 1,500 to 1,600 vph during the Saturday midday peak hour.


OTHER CROSSTOWN STREETS

Aside from West 34th Street, the other crosstown streets in the traffic study area are West 30th, West 31st, West 33rd, and West 35th Streets between Madison and Eighth Avenues, and West 32nd Street between Madison and Seventh Avenues. All even-numbered streets operate eastbound, and odd-numbered streets operate westbound. Each crosstown street has generally one to three lanes of moving traffic, often with curbside parking, and is continuous. West 33rd Street, although continuous within the traffic study area from Sixth to Tenth Avenues, is

interrupted at Broadway just east of Sixth Avenue. West 32nd Street is interrupted by the superblocks between Tenth and Seventh Avenues.




Volumes on these streets vary substantially on a street-by-street and block-by-block basis. Eastbound streets carry between 100 and 800 vph within the traffic study area during each peak hour. Westbound streets generally carry 200 to 900 vph within the traffic study area during the weekday AM peak hour, 200 to 900 vph during the weekday midday peak hour, and 200 to 1,100 vph during the weekday PM peak hour.

Figures 16-2 through 16-10 provide 2008 base traffic volumes for the weekday AM (8 to 9 AM), midday (12 to 1 PM), PM (5 to 6 PM), and Saturday midday (1 to 2 PM) peak hours, respectively.

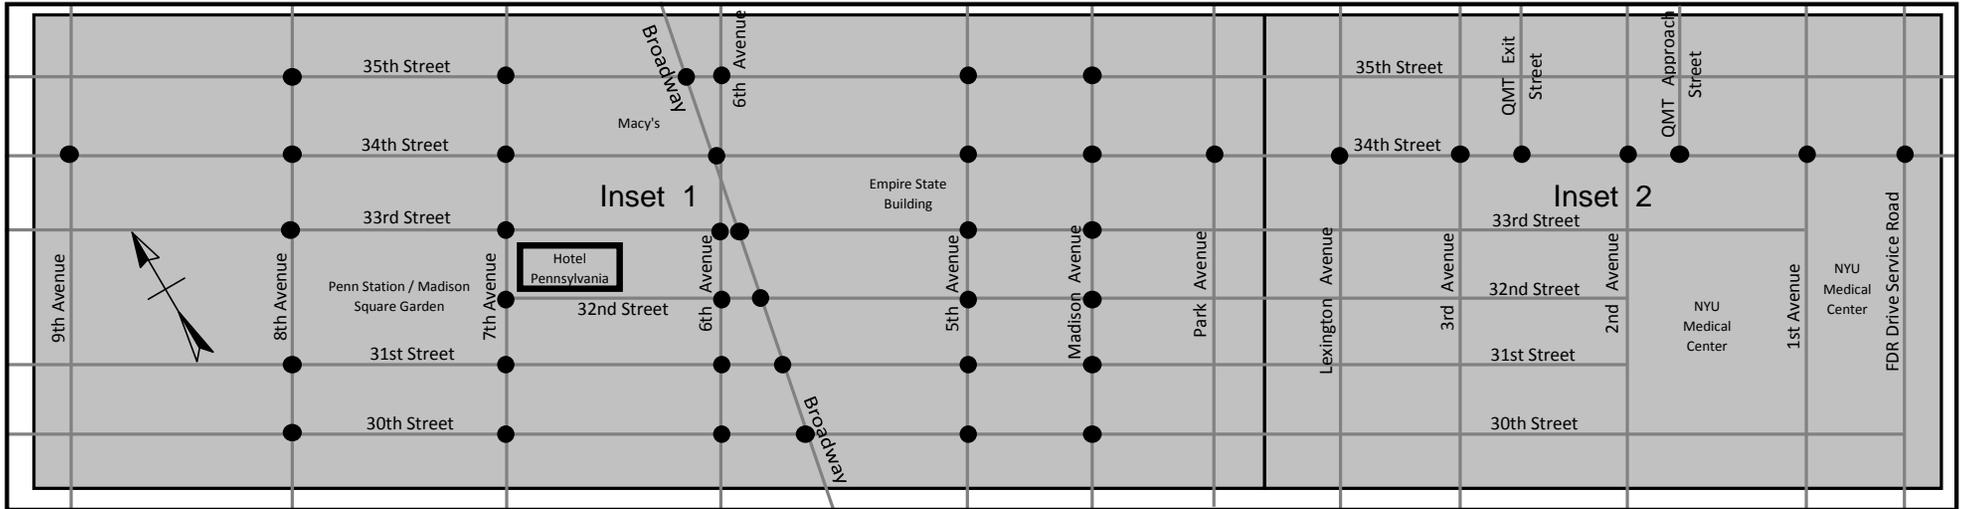

15 PENN PLAZA




2008 Existing Traffic Volumes: Key Map
Figure 16-2

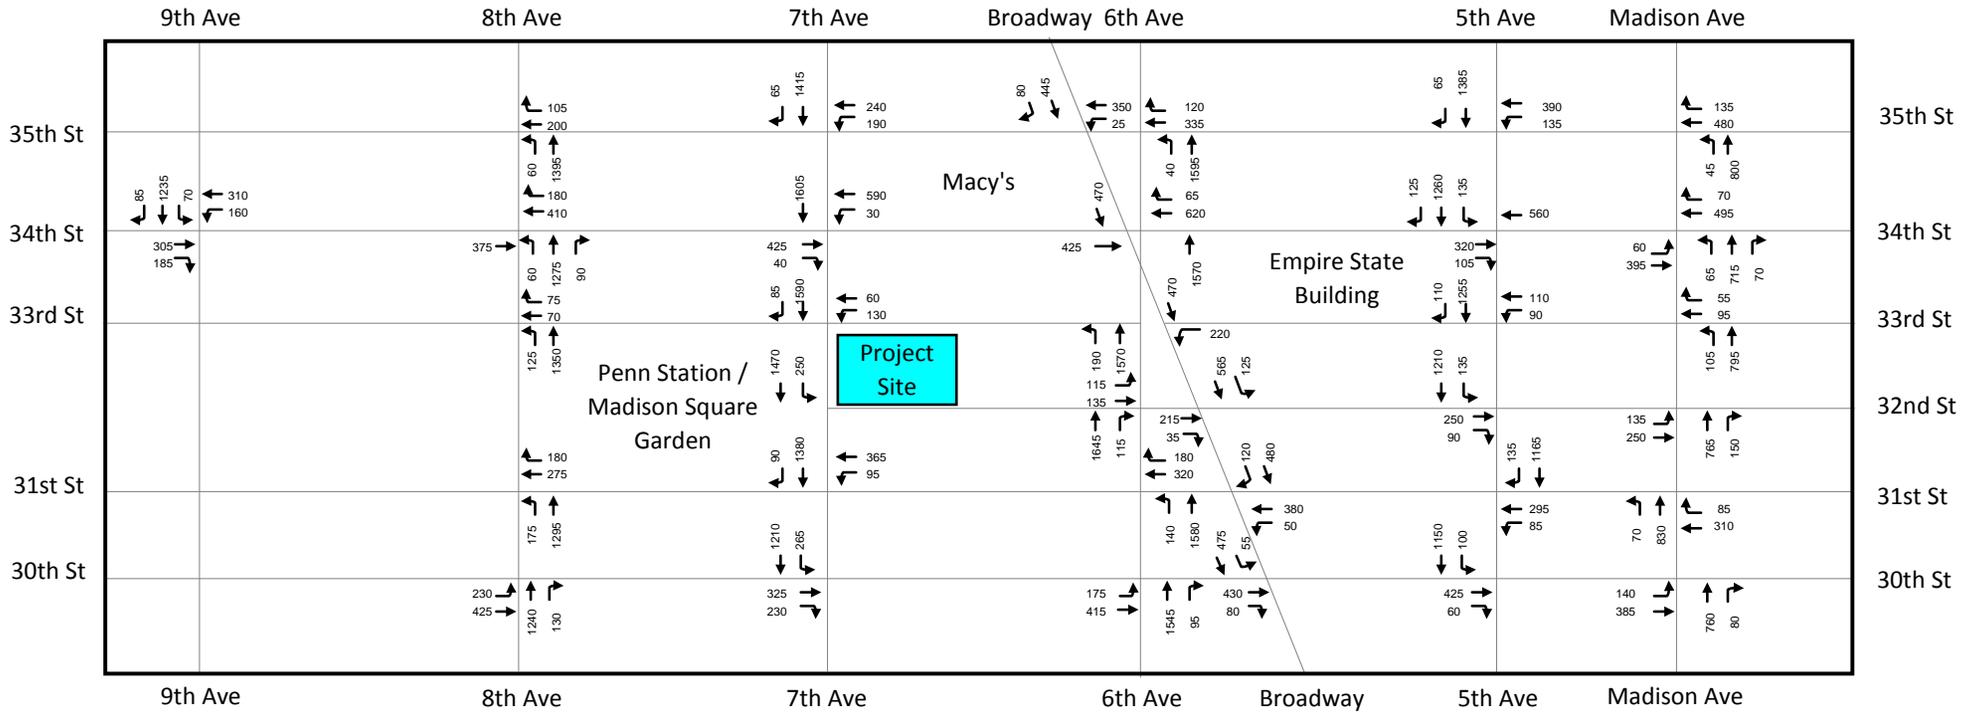

2008 Existing Traffic Volumes - Inset 1
(Weekday AM Peak Hour)

15 PENN PLAZA



Figure 16-3

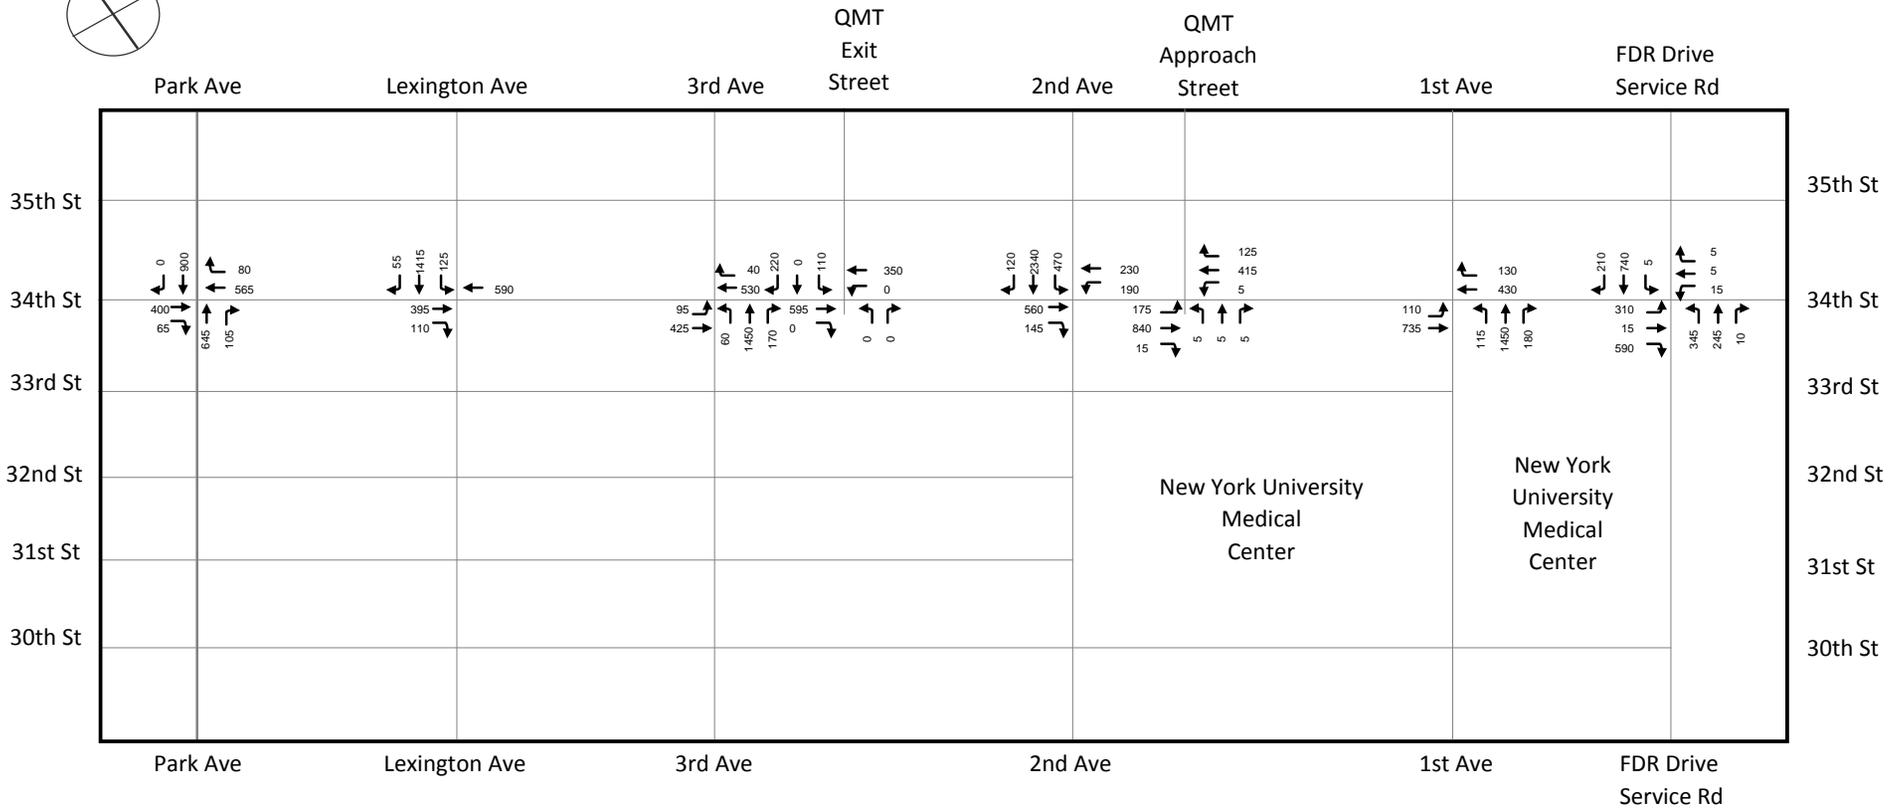

2008 Existing Traffic Volumes - Inset 2
(Weekday AM Peak Hour)

15 PENN PLAZA




Figure 16-4

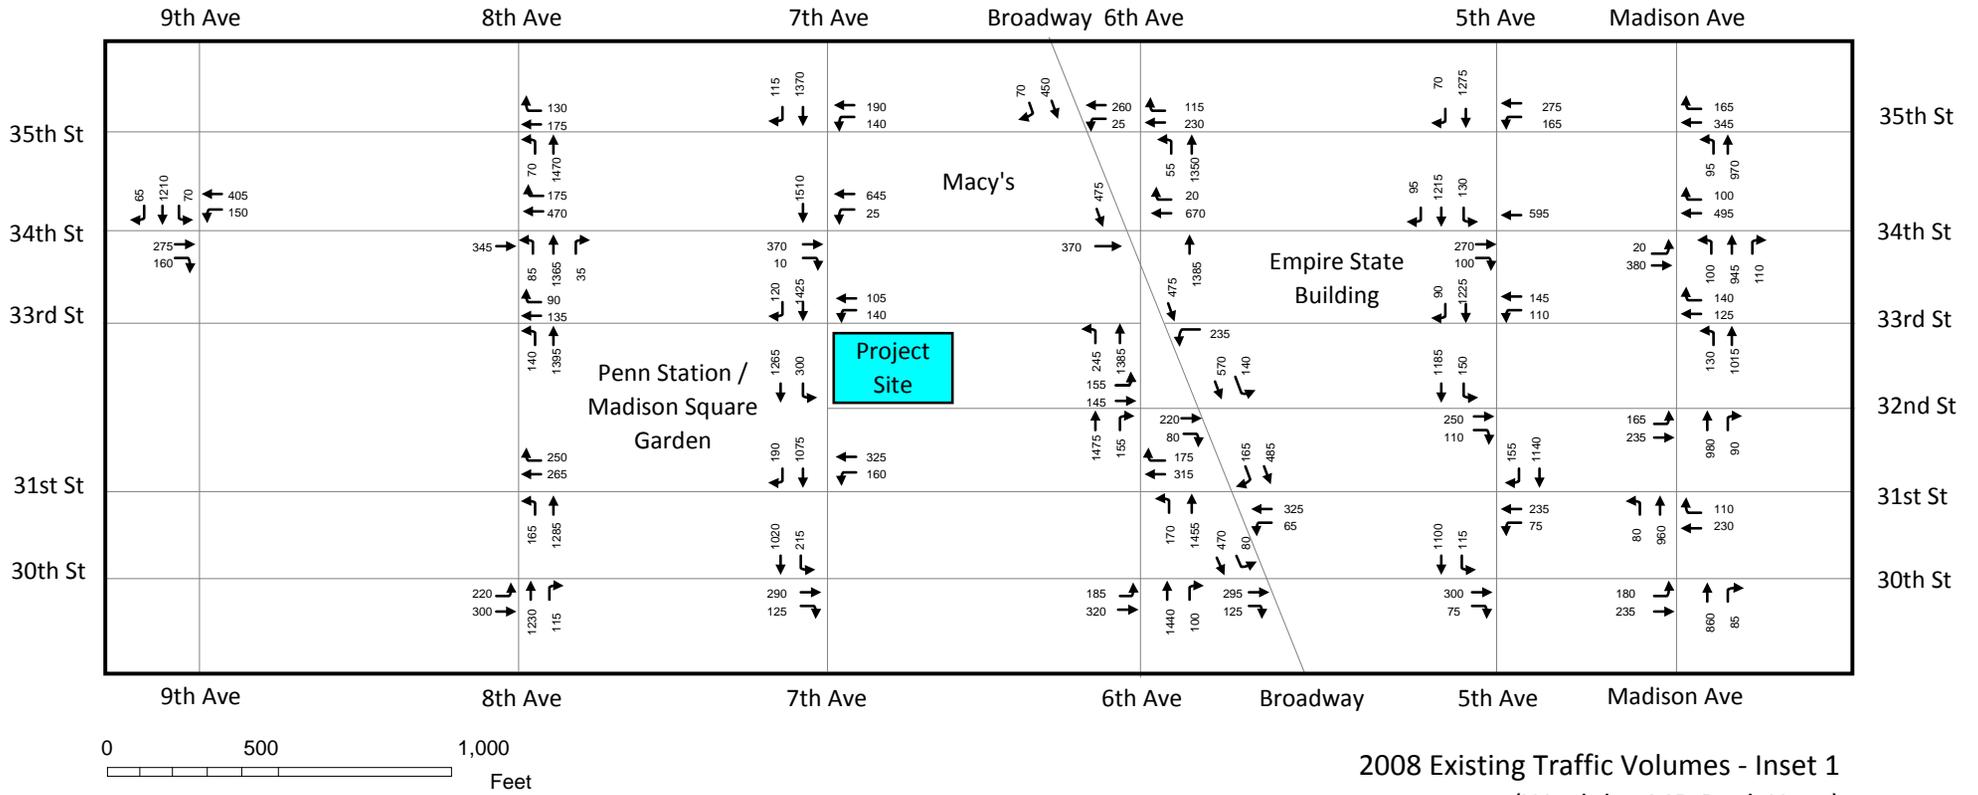

2008 Existing Traffic Volumes - Inset 1 (Weekday MD Peak Hour)

15 PENN PLAZA




Figure 16-5

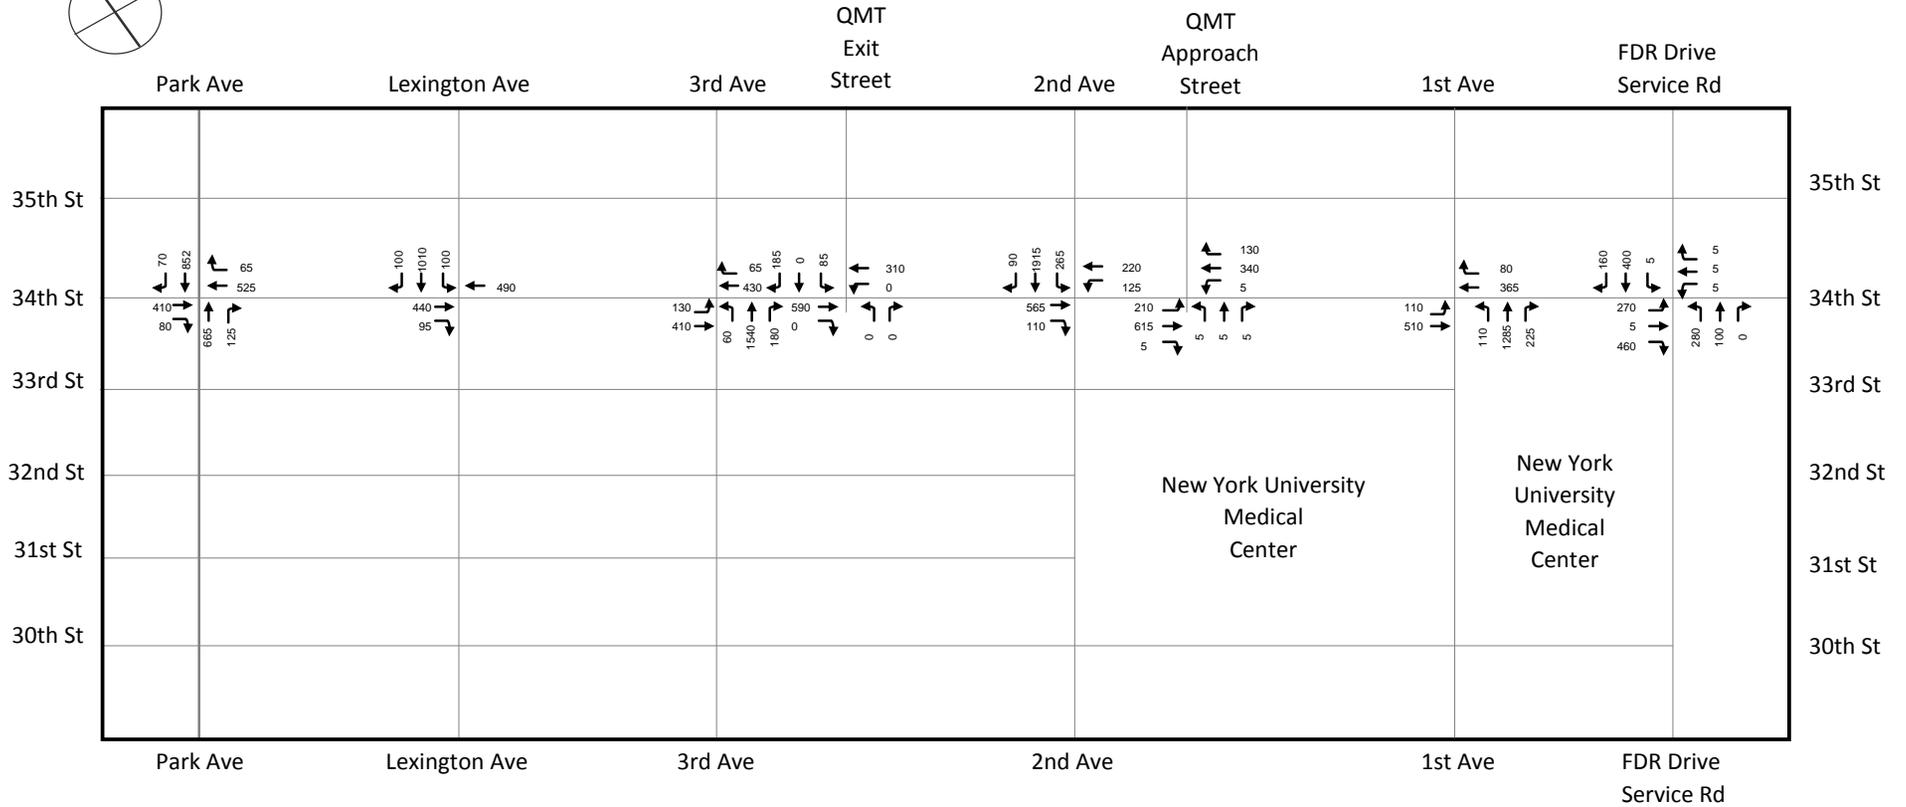

2008 Existing Traffic Volumes - Inset 2
(Weekday MD Peak Hour)

15 PENN PLAZA




Figure 16-6

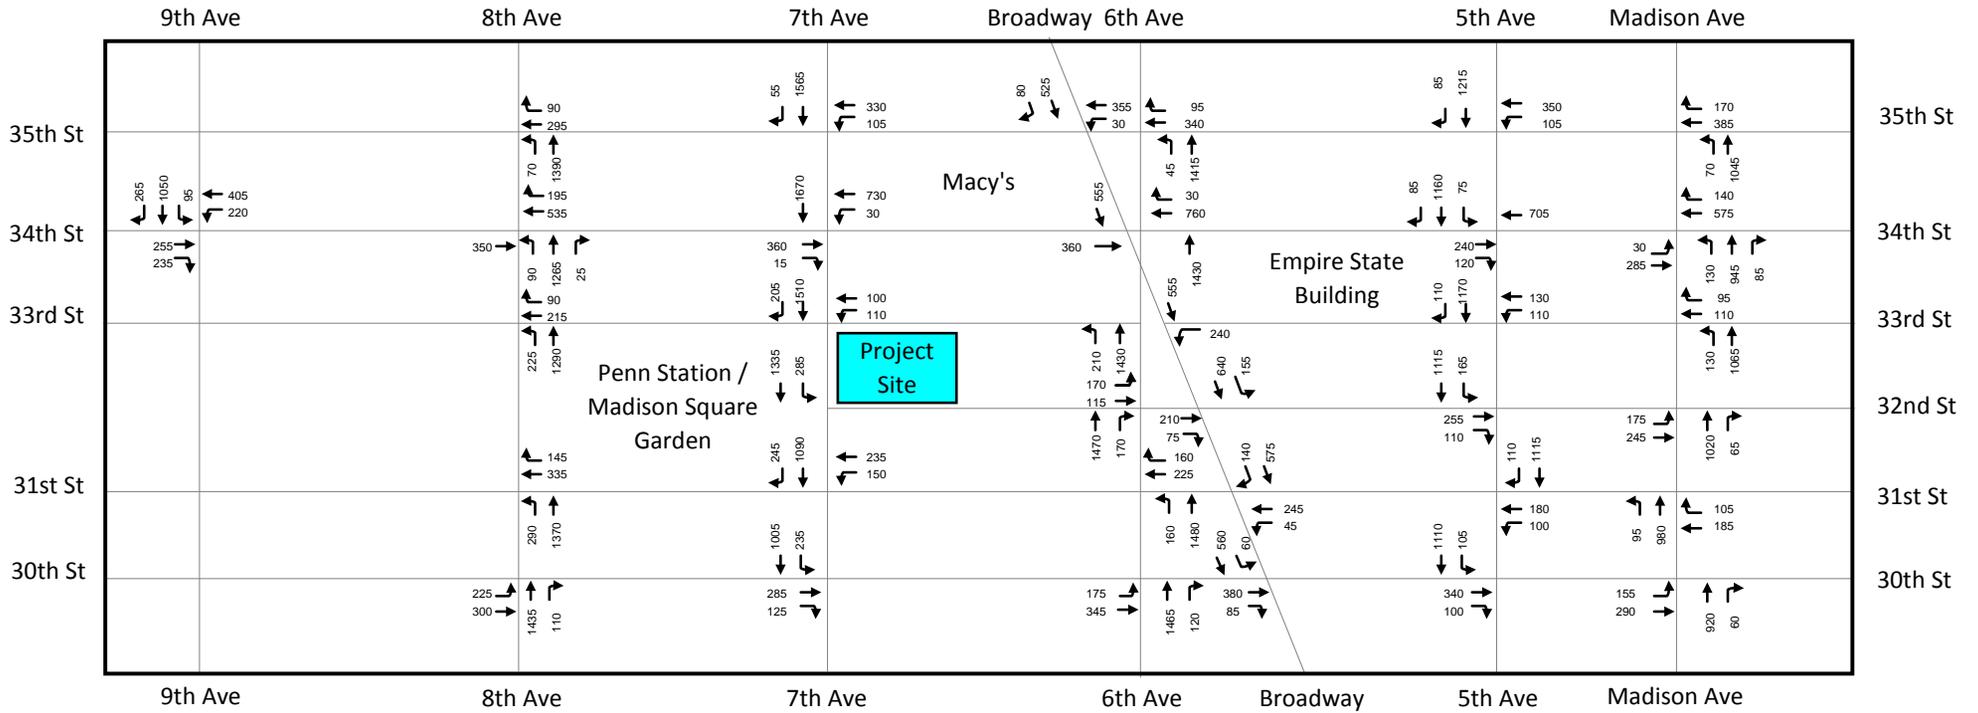



2008 Existing Traffic Volumes - Inset 1
(Weekday PM Peak Hour)

15 PENN PLAZA

Figure 16-7

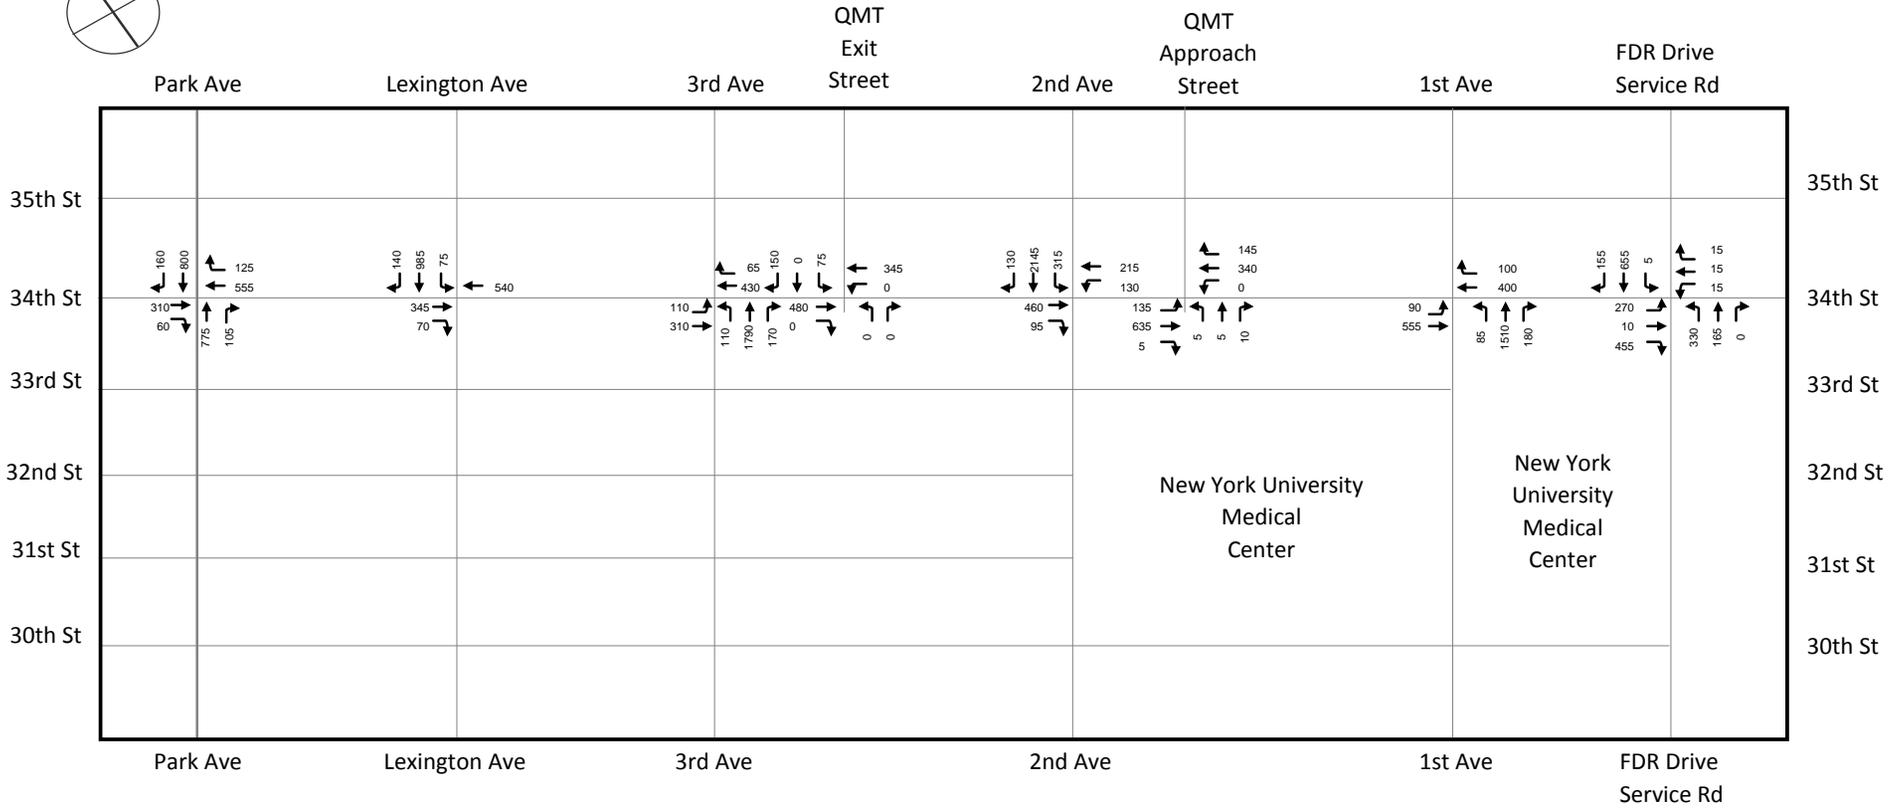




2008 Existing Traffic Volumes - Inset 2 (Weekday PM Peak Hour)

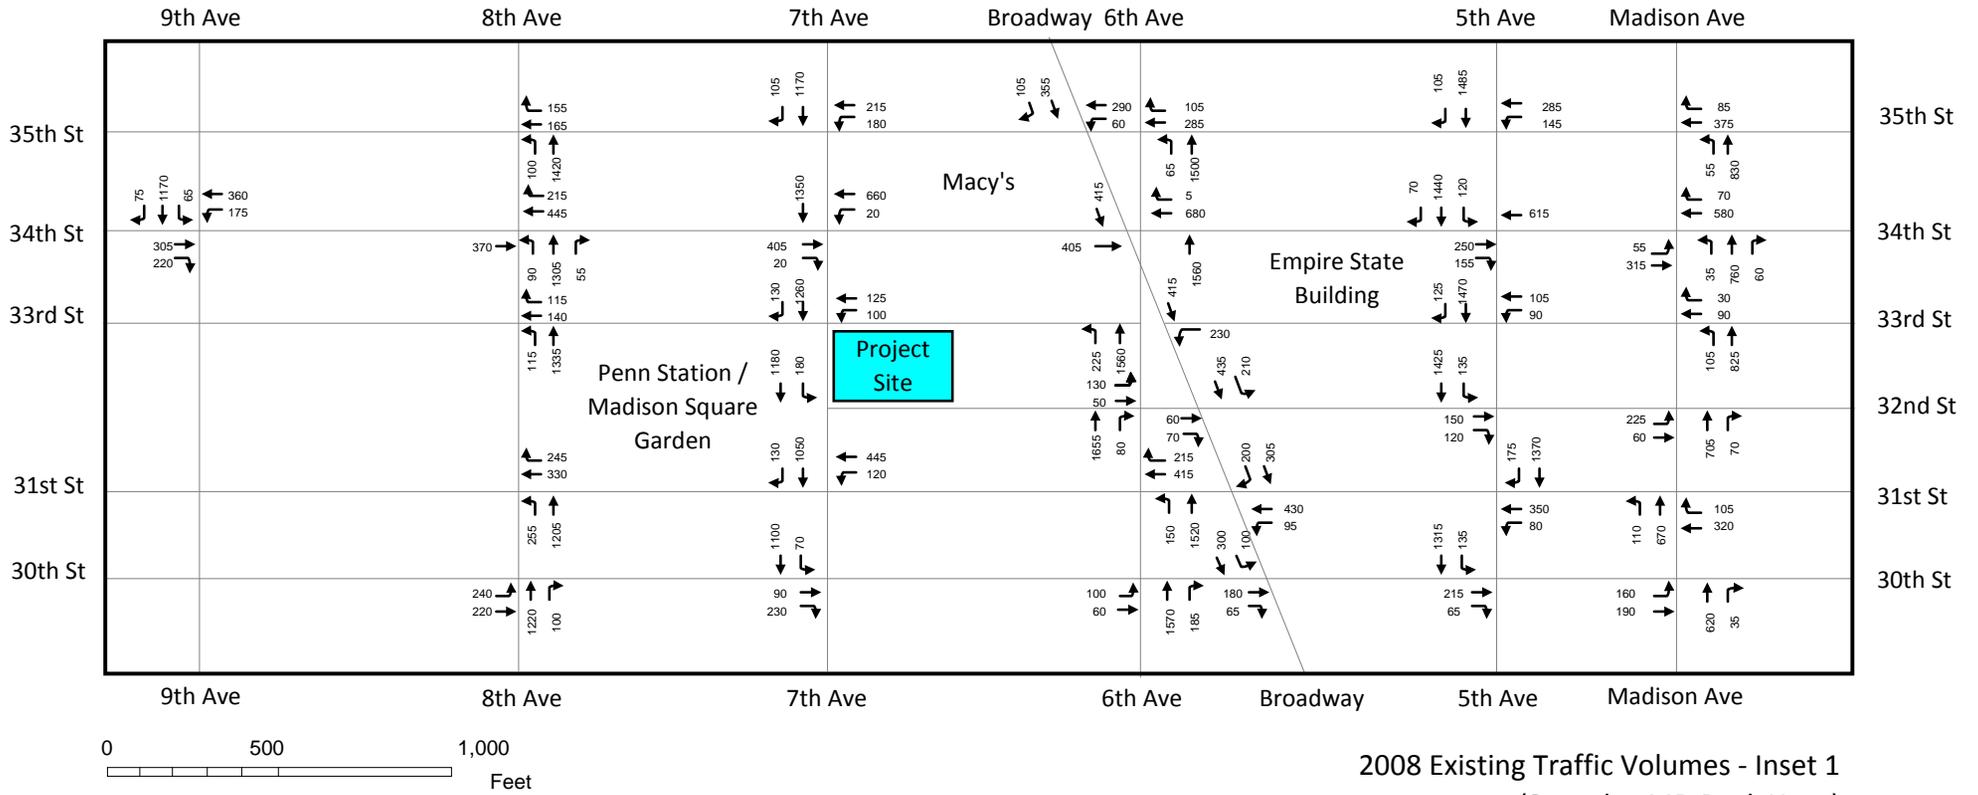

2008 Existing Traffic Volumes - Inset 1
(Saturday MD Peak Hour)

15 PENN PLAZA

Figure 16-9

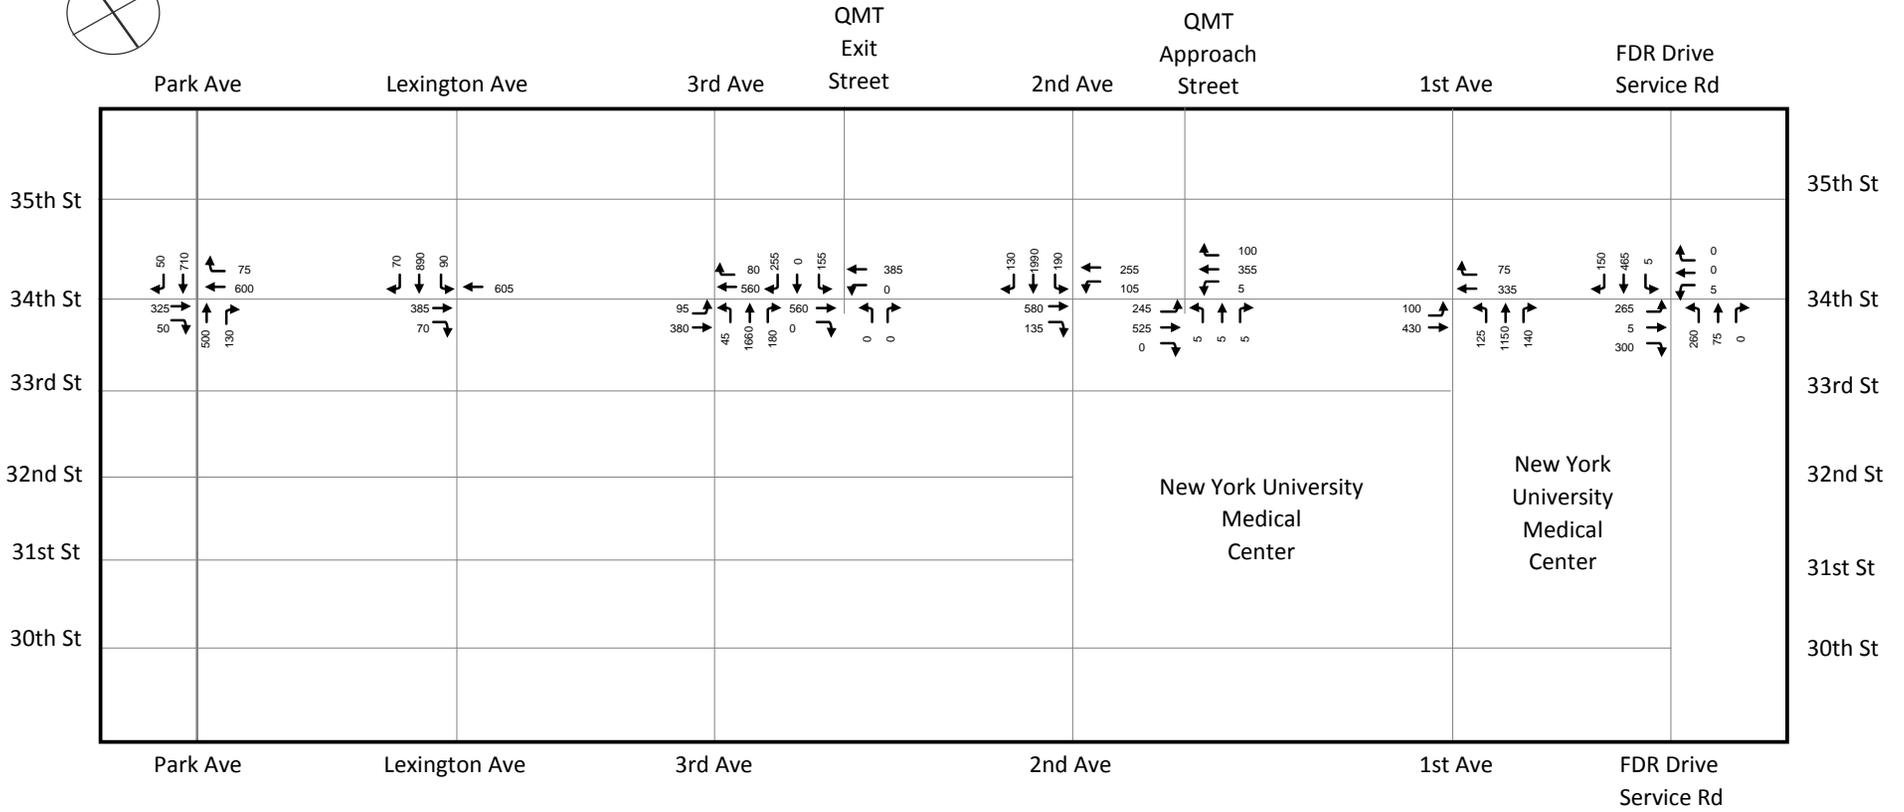

2008 Existing Traffic Volumes - Inset 2 (Saturday MD Peak Hour)

15 PENN PLAZA

Figure 16-10

LEVEL OF SERVICE ANALYSIS

An intersection capacity and level of service analysis was conducted for the 43 study area intersections. The following summarizes the analysis results by travel corridor and details the locations with substandard operating levels (marginally unacceptable mid-LOS D or more than 45 seconds of average delay) by analysis time period.

SUMMARY OF ANALYSIS RESULTS

Although most intersections in the traffic study area operate at overall acceptable levels during the four analysis peak hours, individual approach movements at numerous intersections operate at mid-LOS D or worse. Overall, of the 145 approach movements analyzed, 27 approach movements operate at mid-LOS D or worse in the AM peak hour; 18 approach movements operate at mid-LOS D or worse in the midday peak hour, 23 approach movements operate at mid-LOS D or worse in the PM peak hour; and 18 approach movements operate at mid-LOS D or worse in the Saturday midday peak hour. These findings are presented in **Table 16-9**. Intersection approaches or individual approach movements operating at capacity or within LOS E or F are discussed below.

Table 16-9
2008 Existing Conditions
Number of Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Level of Service	Analysis Hour			
	AM	Weekday Midday	PM	Saturday Midday
Mid-LOS D	7	4	6	5
LOS E	6	4	4	7
LOS F	14	10	13	6

LOCATIONS WITH SUBSTANDARD OPERATING LEVELS OF SERVICE

Locations having at least one lane group operating at mid-LOS D—45.0 seconds per vehicle (spv) of delay or higher—are described below.

Weekday AM Peak Hour

Of the 43 intersections studied, 20 intersections have at least one lane group operating at mid-LOS D or worse during the weekday AM peak hour.

- The West 35th Street westbound approach to Fifth Avenue operates at mid-LOS D.
- The left turn lane on the West 35th Street westbound approach to Fifth Avenue operates at LOS E.
- The West 33rd Street westbound approach to Fifth Avenue operates at mid-LOS D.
- The West 30th Street eastbound approach to Fifth Avenue operates at LOS F.
- The West 34th Street eastbound approach to Sixth Avenue/Broadway operates at LOS F.
- The West 34th Street westbound approach to Sixth Avenue/Broadway operates at LOS F.
- The West 35th Street westbound approach to Broadway operates at mid-LOS D.
- The left turn lane on the West 33rd Street westbound approach to Broadway operates at LOS F.
- The West 35th Street westbound approach to Seventh Avenue operates at LOS F.

- The West 33rd Street westbound approach to Seventh Avenue operates at LOS E.
- The West 35th Street westbound approach to Eighth Avenue operates at mid-LOS D.
- The right turn lane on the West 34th Street eastbound approach to Ninth Avenue operates at LOS E.
- The East 30th Street eastbound approach to Madison Avenue operates at mid-LOS D.
- The left turn lane on the East 34th Street eastbound approach to Madison Avenue operates at mid-LOS D.
- The East 35th Street westbound approach to Madison Avenue operates at LOS F.
- The right turn lane on the East 35th Street westbound approach to Madison Avenue operates at LOS E.
- The East 34th Street westbound approach to Park Avenue operates at LOS F.
- The East 34th Street westbound approach to Lexington Avenue operates at LOS F.
- The Lexington Avenue southbound approach to East 34th Street operates at LOS F.
- The left turn lane on the I-495 southbound approach to East 34th Street operates at LOS E.
- The right turn lane on the East 34th Street approach to Second Avenue operates at LOS F.
- The East 34th Street westbound approach to the I-495 ramp operates at mid-LOS D.
- The right turn lane on the East 34th Street westbound approach to the I-495 ramp operates at LOS F.
- The East 34th Street eastbound approach to First Avenue operates at LOS F.
- The left turn lane on the East 34th Street approach to the FDR Drive operates at LOS F.
- The East 34th Street approach to the FDR Drive operates at LOS E.
- The left turn lane on the FDR Drive northbound approach to East 34th Street operates at LOS F.

Weekday Midday Peak Hour

Of the 43 intersections studied, 16 intersections have at least one lane group operating at mid-LOS D or worse during the weekday midday peak hour.

- The left turn lane on the West 35th Street westbound approach to Fifth Avenue operates at LOS F.
- The West 33rd Street westbound approach to Fifth Avenue operates at LOS F.
- The West 30th Street eastbound approach to Fifth Avenue operates at LOS E.
- The West 30th Street eastbound approach to Sixth Avenue operates at LOS F.
- The West 34th Street eastbound approach to Sixth Avenue/Broadway operates at LOS F.
- The West 34th Street westbound approach to Sixth Avenue/Broadway operates at mid-LOS D.
- The left turn lane on the West 33rd Street westbound approach to Broadway operates at LOS F.
- The West 33rd Street westbound approach to Seventh Avenue operates at LOS F.
- The West 31st Street westbound approach to Seventh Avenue operates at mid-LOS D.
- The West 30th Street eastbound approach to Eighth Avenue operates at LOS F.
- The right turn lane on the West 34th Street eastbound approach to Ninth Avenue operates at mid-LOS D.

15 Penn Plaza FEIS

- The right turn lane on the East 35th Street westbound approach to Madison Avenue operates at LOS E.
- The East 34th Street westbound approach to Park Avenue operates at LOS F.
- The left turn lane on the I-495 southbound approach to East 34th Street operates at LOS E.
- The right turn lane on the East 34th Street approach to Second Avenue operates at LOS E.
- The right turn lane on the East 34th Street westbound approach to the I-495 ramp operates at LOS F.
- The left turn lane on the East 34th Street approach to the FDR Drive operates at LOS F.
- The East 34th Street approach to the FDR Drive operates at mid-LOS D.

Weekday PM Peak Hour

Of the 43 intersections studied, 19 intersections have at least one lane group operating at mid-LOS D or worse during the weekday PM peak hour.

- The left turn lane on the West 35th Street westbound approach to Fifth Avenue operates at mid-LOS D.
- The West 33rd Street westbound approach to Fifth Avenue operates at LOS E.
- The West 30th Street eastbound approach to Fifth Avenue operates at LOS F.
- The West 30th Street eastbound approach to Sixth Avenue operates at LOS F.
- The West 34th Street eastbound approach to Sixth Avenue/Broadway operates at mid-LOS D.
- The West 34th Street westbound approach to Sixth Avenue/Broadway operates at LOS F.
- The West 35th Street westbound approach to Broadway operates at LOS E.
- The left turn lane on the West 33rd Street westbound approach to Broadway operates at LOS F.
- The West 33rd Street westbound approach to Seventh Avenue operates at LOS E.
- The West 30th Street eastbound approach to Eighth Avenue operates at LOS F.
- The West 35th Street westbound approach to Eighth Avenue operates at LOS F.
- The right turn lane on the West 34th Street eastbound approach to Ninth Avenue operates at LOS F.
- The right turn lane on the East 35th Street westbound approach to Madison Avenue operates at LOS F.
- The East 34th Street westbound approach to Madison Avenue operates at LOS F.
- The East 34th Street westbound approach to Park Avenue operates at LOS F.
- The East 34th Street westbound approach to Lexington Avenue operates at LOS F.
- The right turn lane on the Lexington Avenue southbound approach to East 34th operates at LOS E.
- The left turn lane on the I-495 southbound approach to East 34th Street operates at mid-LOS D.
- The right turn lane on the East 34th Street approach to Second Avenue operates at mid-LOS D.
- The right turn lane on the East 34th Street westbound approach to the I-495 ramp operates at LOS F.
- The left turn lane on the East 34th Street approach to the FDR Drive operates at LOS F.
- The East 34th Street approach to the FDR Drive operates at mid-LOS D.

- The left turn lane on the FDR Drive northbound approach to East 34th Street operates at mid-LOS D.

Saturday Midday Peak Hour

Of the 43 intersections studied, 17 intersections have at least one lane group operating at mid-LOS D or worse during the Saturday midday peak hour.

- The left turn lane on the West 35th Street westbound approach to Fifth Avenue operates at LOS E.
- The West 33rd Street westbound approach to Fifth Avenue operates at mid-LOS D.
- The West 34th Street eastbound approach to Sixth Avenue/Broadway operates at LOS F.
- The West 31st Street westbound approach to Broadway operates at LOS F.
- The West 34th Street eastbound approach to Seventh Avenue operates at LOS E.
- The West 33rd Street westbound approach to Seventh Avenue operates at mid-LOS D.
- The West 31st Street westbound approach to Seventh Avenue operates at LOS E.
- The West 31st Street westbound approach to Eighth Avenue operates at LOS F.
- The West 35th Street westbound approach to Eighth Avenue operates at LOS E
- The left turn lane on the East 34th Street eastbound approach to Madison Avenue operates at LOS E.
- The East 34th Street westbound approach to Madison Avenue operates at mid-LOS D.
- The East 34th Street westbound approach to Park Avenue operates at LOS F.
- The East 34th Street westbound approach to Lexington Avenue operates at LOS F.
- The East 34th Street eastbound approach to Third Avenue operates at mid-LOS D.
- The left turn lane on the I-495 southbound approach to East 34th Street operates at LOS F.
- The right turn lane on the East 34th Street approach to Second Avenue operates at mid-LOS D.
- The right turn lane on the East 34th Street westbound approach to the I-495 ramp operates at LOS E.
- The left turn lane on the East 34th Street approach to the FDR Drive operates at LOS E.

Detailed analysis results, including the v/c ratio, delay, and LOS for intersections with one or more approach or lane group operating at mid-LOS D or worse, are provided in **Table 16-10** for the weekday AM, midday, PM, and Saturday midday peak periods.

**Table 16-10
2008 Existing Conditions**

Intersection Approach Movements Operating at Mid-LOS D, LOS E, or LOS F

Intersection	Approach	Weekday AM				Weekday MD				Weekday PM				Saturday MD			
		Movt.	V/C	Delay	LOS	Movt.	V/C	Delay	LOS	Movt.	V/C	Delay	LOS	Movt.	V/C	Delay	LOS
			Ratio	(spv)			Ratio	(spv)			Ratio	(spv)			Ratio	(spv)	
Ninth Ave & 34th St	EB	R	0.87	63.0	E	R	0.75	47.1	mid-D	R	1.05	286.6	F				
Eighth Ave & 30th St	EB					LT	0.57	99.9	F	LT	0.60	113.8	F	LT			
Eighth Ave & 31st St	WB	TR				TR				TR				TR	0.61	102.6	F
Eighth Ave & 35th St	WB	TR	0.88	53.3	mid-D	TR				TR	1.04	232.6	F	TR	0.98	72.9	E
Seventh Ave & 31st St	WB	LT				LT	0.93	49.4	mid-D	LT				LT	0.97	56.0	E
Seventh Ave & 33rd St	WB	LT	0.92	75.8	E	LT	1.05	282.5	F	LT	0.92	73.0	E	LT	0.81	52.6	mid-D
Seventh Ave & 34th St	EB	T				T				T				T	0.43	73.6	E
Seventh Ave & 35th St	WB	LT	0.60	137.2	F	LT				LT				LT			
Broadway & 31st St	WB	LT				LT				LT				LT	1.05	254.9	F
Broadway & 33rd St	WB	L	1.00	87.8	F	L	0.99	81.2	F	L	1.03	196.6	F	L			
Broadway & 35th St	WB	T	0.89	51.8	mid-D	T				T	0.91	55.3	E	T			
Sixth Ave & 30th St	EB	LT				LT	0.78	100.5	F	LT	0.78	97.8	F	LT			
Sixth Ave / Bdwy & 34th St	EB	T	1.05	268.5	F	T	1.04	234.5	F	T	0.85	47.4	mid-D	T	1.03	354.3	F
	WB	TR	1.01	104.2	F	TR	0.91	46.1	mid-D	TR	1.05	256.7	F	TR			
Fifth Ave & 30th St	EB	TR	1.05	263.8	F	TR	0.96	65.1	E	TR	1.05	268.0	F	TR			
Fifth Ave & 33rd St	WB	LT	0.79	50.3	mid-D	LT	1.00	85.8	F	LT	0.90	64.6	E	LT	0.75	45.7	mid-D
Fifth Ave & 35th St	WB	L	0.81	68.1	E	L	0.96	95.2	F	L	0.58	47.1	mid-D	L	0.81	66.7	E
		T	0.90	48.4	mid-D	T				T				T			
Madison Ave & 30th St	EB	T	0.89	50.0	mid-D	T				T				T			
Madison Ave & 34th St	EB	L	0.64	49.6	mid-D	L				L				L	0.73	67.2	E
	WB	T				T				T	1.03	175.6	F	T	0.95	50.9	mid-D
Madison Ave & 35th St	WB	T	1.05	209.5	F	T				T				T			
		R	0.86	76.8	E	R	0.77	55.9	E	R	1.05	312.3	F	R			
Park Ave & 34th St	WB	T	1.05	202.5	F	T	1.05	212.3	F	T	1.05	203.9	F	T	1.05	192.8	F
Lexington Ave & 34th St	WB	T	1.05	189.7	F	T				T	1.03	191.6	F	T	1.05	183.0	F
		LT	1.01	83.5	F	LT				LT				LT			
		R				R				R	0.92	69.8	E	R			
Third Ave & 34th St	WB	TR				TR				TR				TR	0.92	49.0	mid-D
Ramp from I-495 & 34th St	SB	L	0.82	75.9	E	L	0.63	55.3	E	L	0.56	50.6	mid-D	L	1.05	311.0	F
Second Ave & 34th St	EB	R	1.05	292.9	F	R	0.78	62.1	E	R	0.67	50.4	mid-D	R	0.76	53.9	mid-D
Ramp to I-495 & 34th St	WB	LT	0.86	52.7	mid-D	LT				LT				LT			
		R	0.95	100.0	F	R	0.99	109.0	F	R	1.05	296.9	F	R	0.70	57.9	E
First Ave & 34th St	EB	LT	1.05	244.5	F	LT				LT				LT			
FDR Drive & 34th St	EB	L	1.05	292.6	F	L	0.98	89.1	F	L	1.00	94.3	F	L	0.87	66.0	E
		LTR	0.92	69.5	E	LTR	0.74	47.7	mid-D	LTR	0.75	49.2	mid-D	LTR			
	NB	L	1.05	174.6	F	L				L	0.94	47.4	mid-D	L			

PARKING

Field inventories were conducted to evaluate existing parking conditions. On-street parking regulations and off-street public parking facilities were identified within the parking study area defined below. The future parking demand associated with the future with the proposed project is expected to be concentrated in the vicinity of the development site, and it is expected that this demand would be primarily accommodated by off-street facilities. Since the Proposed Project does not contain a residential component, overnight parking demand was not analyzed. Therefore, the on-street parking assessment involved only an inventory of the parking study area’s on-street parking regulations. Detailed surveys of supply and utilization for the study area’s off-street parking facilities were conducted and are summarized below.

OFF-STREET PARKING

An inventory of public parking lots and garages within a ¼-mile radius of the 15 Penn Plaza site was prepared based on field surveys conducted in January 2009. Parking occupancy surveys were conducted for all off-street parking facilities to confirm the available inventory. **Figure**

16-11 illustrates the boundaries of the parking study area and the locations of the off-street parking facilities.

The parking study area roughly extends from West 37th to West 27th Streets and from Ninth Avenue to Fifth Avenue. The January 2009 survey identified 47 off-street parking facilities. The total capacity of the facilities surveyed is slightly less than 6,500 spaces during the day. As shown in **Table 16-11**, the 47 surveyed facilities have an occupancy rate of about 87 percent during the weekday midday period with approximately 870 available spaces during the weekday midday hour.

ON-STREET PARKING

On-street parking regulations were also inventoried within the same parking study area on weekdays and on Saturday, with parking regulations recorded on a block-by-block basis. Most of the area is characterized by a blend of very stringent parking regulations that restrict parking all day during the week and on Saturdays. Those areas where parking is not restricted during the entire day often have peak hour parking restrictions. **Figure 16-12** and **Table 16-12** detail the on-street parking restrictions on a block-by-block basis.



- Project Site
- 1/4-Mile Perimeter
- 99 Public Off-Street Parking Facility

15 PENN PLAZA

Off-Street Parking Facilities
Figure 16-11

Table 16-11
2008 Existing Off-street Parking Utilization

Map #	Name	Address	License Number	Licensed Capacity	Weekday Midday		
					Utilization Rate	Demand	Available Capacity
1	New Garden Garage LLC/Meyers ¹	218-230 West 31st Street / 227 West 30th Street	1180977	600	90%	540	60
2	Pater Realty Co. LLC	42-64 West 30th Street	1192326	100	30%	30	70
3	Central Parking Systems of New York, Inc	9 West 31st Street	1226482	101	60%	61	40
4	Central Parking System of NY, Inc.	1251 Broadway	0962013	80	90%	72	8
5	Flash 31 Mgmt LLC	124-126 West 31st Street	1262200	34	71%	24	10
6	West 31st Street Garage Corp / Imperial Parking System	371 Seventh Avenue / 148 West 31st Street	1099887	112	34%	38	74
7	Central Parking System of New York, Inc.	300-306 West 31st Street / 308-310 West 31st Street	1231084 / 1231053	63	87%	55	8
8	Central Parking System of New York, Inc.	1 Penn Plaza	0961998	665	80%	532	133
9	Central Parking Systems	1250 Broadway	0908174	150	90%	135	15
10	30 West 33rd Street Corp.	38-46 West 33rd Street	0768357	224	90%	202	22
11	9 West 35th Street LLC/ D/B/A Meyers Parking	9-19 West 35th Street / 12-14 West 36th Street	1180979	225	60%	135	90
12	Fashion 35 Parking LLC	1328 Broadway	1275065	149	87%	129	20
13	Impark 33 LLC	325 5th Avenue	1244704	174	57%	100	74
14	33 Street Operating LLC	35 West 33rd Street	1241305	34	100%	34	0
15	Garden Lots, LLC	125 West 31st Street	1266254	120	75%	90	30
16	Edison NY Parking, LLC	245 West 28th Street	0926756	131	90%	118	13
17	West 28th Garage parking, LLC	241-243 West 28th Street	1233094	240	64%	154	86
18	Troy Parking Corp	217-219 West 28th Street	1186129	25	124%	31	-6
19	Smart Park / Desoto Parking LLC	211 West 29th Street	1201084	50	76%	38	12
20	Park 29, LLC	217-221 West 29th Street	1025798 / 1025799	48	140%	67	-19
21	Quick Park / Garden Garage, LLC	253-255 West 29th Street	1140970	25	100%	25	0
22	Secure Parking LLC	363 West 30th Street	1099298	18	80%	14	4
23	30 West LLC	320 West 30th Street	1155070	82	100%	82	0
24	Post Office Garage LLC / D/B/A Meyers Parking	340 West 31st Street	1181008	255	90%	230	26
25	Central Parking System of New York, Inc.	305-319 West 33rd Street	1094411	250	50%	125	125
26	Lincoln Garage LLC / D/B/A Meyers Parking	323-31 West 34th street	1182737	500	75%	375	125
27	34th and Ninth Parking LLC	436-438 Ninth Avenue / 351-353 West 34th Street	1166499	140	70%	98	42
28	Wizard Car Park, LLC	320 West 36th Street	1091809	150	50%	75	75
29	NY 786 Parking	339 West 36th Street	1131404	25	76%	19	6
30	S and R Parking Corp	318 West 37th Street	0900877	77	95%	73	4
31	Quik Park Queensboro LLC	326 West 37th Street	1263691 / 1263695	130	80%	104	26
32	Quik Park/Garden Garage LLC	384-386 Eighth Avenue	1140965	35	74%	26	9
33	Atrium Parking LLC	161-163 West 36th Street	0469518	149	100%	149	0
34	Pace Parking LLC	990-996 Sixth Avenue	1179983	120	90%	108	12
35	52 West 36th Street Parking LLC	58-70 West 37th Street / 59-61 West 36th Street	0429528	150	100%	150	0
36	Garment 36 Parking LLC	52 West 36th Street	1233097	149	100%	149	0

**Table 16-11 (cont'd)
2008 Existing Off-street Parking Utilization**


Map #	Name	Address	License Number	Licensed Capacity	Weekday Midday			
					Utilization Rate	Demand	Available Capacity	
37	Edison NY Parking, LLC	451 Ninth Avenue / 409 West 35th street	0976955 / 0976953	154	80%	123	31	
38	Edison 9th Avenue Parking Corp	401-409 Ninth Avenue / 412-422 West 34th Street	0696486 / 0428456	207	90%	186	21	
39	Madison Square Parking Corp	359-363 Ninth Avenue	993927	51	100%	51	0	
40	Kinney Parking System, Inc./ D/B/A Central Parking System	33 West 28th Street	1137167	224	60%	134	90	
41	Central Parking System of NY, Inc.	800 Sixth Avenue	1204131	56	80%	45	11	
42	Central Parking System Inc. ²	835-851 Sixth Avenue	0963076	0	-	448	-	
43	Kinney Parking System, Inc. ²	106 West 31st Street	0427104	0	-	15	-	
44	Kinney Parking System, Inc. ²	109 West 31st Street	0427104	0	-	26	-	
45	Central Parking System	7-11 W. 28th Street / 6-10 W. 29th Street	1076965	112	95%	106	6	
46	Fero Parking Corp.	140 West 28th Street	0367501	60	100%	60	0	
47	Central Parking System Inc.	32-34 West 29th Street	1058904	35	91%	32	3	
				Totals	6,479	87%	5,613	867
Notes:								
1 Several floors of this garage serve event parking at Madison Square Garden only. Therefore, available capacity was reduced from 1,500 to 600 spaces.								
2 Currently under construction (demand dispersed throughout parking study area).								

Chapter 16: Traffic and Parking

		16c,4 29c 12b	16c,4b 12	12,4 12,4c 32	12,4b 32	32 12,4c	32 16c,4e 33	32 31a 32	20 25a	32 16h 16c	
		W 35th St 12b 32c 31b	12,4d 16c 32	12,4d 16e 16e 32	16b 16b 32	32 32 32	33 32	32 29 32 32 32	12a 32 32 32	16b 16b 16b 16,5a	
32		14b,28 14b,28	32 17,5a	32	16b 32	32 32	33 32	32 29 32 32 32	12a 32 32 32	16b 16b 16b 16,5a	
		W 34th St 14b,28	31a 17,5a 16e 16e 32	32 32 24	17,5a 16g 16e 16e	17,5a 16e		32 33a 33a 16e	32 24 32 32	32 32 19 16e	
32		14b,28 14b,28 16f 29b 29c	31a 17,5a 16e 16e 32	32 32 24	17,5a 16g 16e 16e	17,5a 16e		32 33a 33a 16e	32 24 32 32	32 32 19 16e	
		W 33rd St 29e 9,3	32 29c 31b	29c 32 32 31b	29f 32c 32b	29f 32 32	6th Ave 32	31b 16e 33a 32 32	16e 32 32 32	32 22a 16d 16e 22a	
	9th Ave	29e 9,3 29e	32 29c 31b	29c 32 32 31b	29f 32c 32b	29f 32 32	6th Ave 32	31b 16e 33a 32 32	16e 32 32 32	32 22a 16d 16e 22a	
		W 32nd St 9,3 29e	32d 32b	32 32 11	32 16c 16c 22a	16c 16c 22a	6th Ave 32	32 32 22 32 22 29g	31b 32 33a 32	22 32 14a,4 32	32 7a 7a
		W 31st St 7 6,1 6,1 22	24a 32 16g 16c	32 32 29a 16c 16c	32 32c 16c 16e	32 16c 16c 29f	6th Ave 32	32 32 16c 32 16c 22 22 construct.	22a 22 22 22a	32 32 32 22a	32 7a 7a 22a
		W 30th St 7 6,1	16c 16e	32 16c	29d 29d	construction 10	6th Ave 32	22 32 16c 22	22a 22 22a	22a 32 7a	

15 PENN PLAZA

On-Street Parking Regulations
Figure 16-12

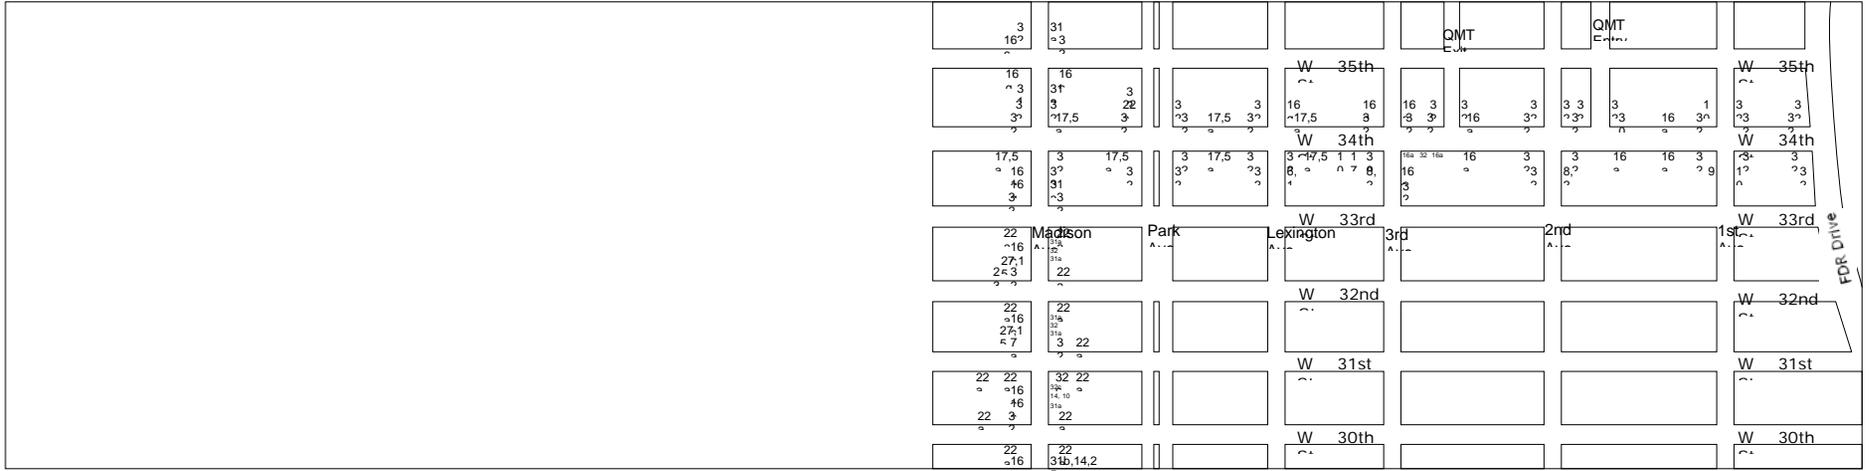

15 PENN PLAZA

On-Street Parking Regulations
Figure 16-12 (cont'd)

Table 16-12
On-Street Parking Regulations

Map No.	Parking Regulation
1	1 Hr Metered Parking from 8am - 7pm except Sun
2	1 Hr Metered Parking from 8:30am - 10pm except Sun
3	1 Hr Metered Parking from 9am - 7pm except Sun
4	Metered Parking from 10am - 4pm Mon-Fri
4	No Parking from 2am - 6am Mon, Wed, Fri
4a	No Parking from 2am - 6am Mon, Wed, Sat
4b	No Parking from 2am - 6am Tue, Thu, Sat
4c	No Parking from 2am - 6am Sat
4d	No Parking from 2am - 6am Sun
4e	No Parking from 2am - 6am
5	No Parking from 7am - Midnight including Sun
5a	No Parking from 7pm - Midnight including Sun
6	No Parking from 7:30am - 8am except Sun
7	No Parking from 8am - 6pm except Sun
7a	No Parking from 8am - 6pm Mon - Fri
8	No Parking from 8am - 8:30am except Sun
9	No Parking from 8:30am - 9am except Sun
10	No Parking from Anytime
11	No Parking (construction regulation)
12	No Standing 6am - 7pm Mon - Fri except Commercial Vehicles, Metered Parking 3 Hr Limit
12a	No Standing 6am - 7pm Mon - Fri except Commercial Vehicles, Metered Parking 4 Hr Limit
12b	No Standing 6am - 7pm Mon - Fri except trucks loading and unloading
13	No Standing 7am - 1pm Mon - Fri
14	4pm - 7pm except Sun
14a	4pm - 7pm Mon - Fri
14b	4pm - 7pm Mon - Sat
15	No Standing 7am - 3:30pm except Sun except Commercial Vehicles, Metered Parking 3 Hr Limit
16	No Standing 7am - 7pm including Sun
16a	No Standing 7am - 7pm Mon - Fri
16b	No Standing 7am - 7pm Mon - Sat
16c	No Standing 7am - 7pm except Sun except Commercial Vehicles, Metered Parking 3 Hr Limit
16d	No Standing 7am - 7pm Mon - Fri except Authorized Vehicles, Dept of Mental Health
16e	No Standing 7am - 7pm Mon - Fri except Commercial Vehicles, Metered Parking 3 Hr Limit
16f	No Standing 7am - 7pm Mon - Fri except trucks loading and unloading.
16g	No Standing 7am - 7pm Mon - Sat except Commercial Vehicles, Metered Parking 3 Hr Limit
16h	No Standing 7am - 7pm except Sun
17	1pm - 7pm Mon - Fri
18	No Standing 7am - 8pm Mon - Fri except Commercial Vehicles, Metered Parking 3 Hr Limit
19	No Standing 7am - Midnight Mon - Sat except Commercial Vehicles, Metered Parking 3 Hr Limit
20	4pm - 6pm Mon - Fri
21	No Standing 8am - 10pm Mon - Sat except Commercial Vehicles, Metered Parking 3 Hr Limit
22	No Standing 8am - 6pm except Sun except Commercial Vehicles, Metered Parking 3 Hr Limit
22a	No Standing 8am - 6pm Mon - Fri except Commercial Vehicles, Metered Parking 3 Hr Limit
23	No Standing 8am - 7pm Mon - Fri except Commercial Vehicles, Metered Parking 3 Hr Limit
24	No Standing 8am - Midnight Mon - Sat except Commercial Vehicles, Metered Parking 3 Hr Limit
24a	No Standing 8am - Midnight Mon - Sat except trucks loading and unloading
25	No Standing 10am - 4pm except Sun except Commercial Vehicles, Metered Parking 3Hr Limit
25a	No Standing 10am - 4pm Mon - Fri except Commercial Vehicles, Metered Parking 3Hr Limit
26	No Standing 1pm - 7pm Mon - Fri except Commercial Vehicles, Metered Parking 3 Hr Limit
27	No Standing 3:30pm - 7pm Mon - Fri, Bus Layover Area
28	10am - 4pm Mon - Sat except Commercial Vehicles, Metered Parking 3 Hr Limit
29	No Standing except Authorized Vehicles
29a	No Standing except Authorized Vehicles, Consuls and Diplomats
29b	No Standing except Authorized Vehicles, FISA Vehicles only
29c	No Standing except Authorized Vehicles, NY Press License Plates
29d	No Standing except Authorized Vehicles, NYPD
29e	No Standing except Authorized Vehicles, US Mail
29f	No Standing except Commercial Vehicles, Metered Parking 3 Hr Limit
29g	No Standing including Sun except Commercial Vehicles, Metered Parking 3 Hr Limit
30	No Standing except pick-ups & drop-offs
31	No Standing
31a	No Standing, Bus Stop
31b	No Standing, Taxi Stand
32	No Standing Anytime
32a	No Standing Anytime except Authorized Vehicles, Police Dept. Vehicles
32b	No Standing Anytime, Bus Layover Area
32c	No Standing Anytime, Hotel Loading Zone
32d	No Standing Anytime, Taxi Stand
33	No Stopping
33a	No Stopping Anytime

D. 2014 NO ACTION

ROADWAY MODIFICATIONS

Several modifications to the study area roadway network are expected to in place by 2014. These modifications are expected to be implemented in accordance with NYCDOT initiatives.

SAFE STREETS FOR SENIORS

NYCDOT has implemented a city-wide program of improving pedestrian safety conditions for senior citizens. One traffic signal timing factor considered at intersections is the pedestrian walk time assumed for crossing. Within designated areas, NYCDOT has proposed reducing the assumed pedestrian crossing walk rate from four to three feet per second to provide additional pedestrian crossing time. The Midtown West/Chelsea Senior Safety Area overlaps a large portion of the traffic study area. Traffic signal timings within this Senior Safety Area were checked for conformance with this revised pedestrian walk rate parameter and modified as necessary in both the future with the proposed project and the No Action conditions to satisfy reduced walking rate traffic signal timing requirements.

GREEN LIGHT FOR MIDTOWN / BROADWAY CLOSURE

After the certification of the DEIS, New York City Mayor Michael Bloomberg announced the Green Light for Midtown project would be the new permanent configuration for Broadway. The project includes the complete closure of Broadway to through traffic at Times Square and Herald Square, as well as other geometric changes on Broadway between Columbus Circle and West 26th Street. The 2014 No Action and future with the proposed project conditions were updated to address these geometric changes along Broadway. In addition, NYCDOT published a report regarding traffic circulation changes caused by the closure of Broadway. These changes in traffic circulation patterns were incorporated into the 2014 No Action and future with the proposed project traffic networks, and analyses were updated to reflect a changed condition of Broadway.

34TH STREET BUS RAPID TRANSITWAY (BRT)

Since the DEIS was completed, NYCDOT announced a proposal for the construction of a new right-of-way for crosstown bus service along 34th Street. The 34th Street Transitway (Transitway) proposal envisions a physically separate right-of-way for buses on 34th Street, as well as passenger boarding islands, a prepayment fare system, and other bus operations improvements. The Transitway would feature a select bus service route between the Javits Convention Center (West 34th Street between Eleventh and Twelfth Avenues) and the East 34th Street ferry landing, along 34th Street. The Transitway would be used by existing and expanded express bus routes from Brooklyn, Queens, Staten Island, and New Jersey, buses connecting to the Pier 79/West 39th Street ferry terminal, and other local buses. The Transitway would also create a new pedestrian plaza in the middle of Manhattan and other pedestrian mobility, safety, and comfort enhancements along the corridor.

As currently proposed, the Transitway would consist of a two-lane, bi-directional bus lane aligned against one curb of the street. The remainder of the street would be used for one-way traffic, running outbound from midtown: westbound from Sixth Avenue, and eastbound from Fifth Avenue. Between Fifth and Sixth Avenues, buses would be the only through traffic allowed, with the remainder of the space devoted to new pedestrian spaces. Loading zones and parking would be available along at least one side of each block of the Transitway at all times.

The Transitway is proposed to be completed by late 2013 or early 2014. It requires various City and state approvals, and full implementation of the project as currently proposed will require funding from the Federal Transit Administration. The Transitway also must undergo environmental review pursuant to the State Environmental Quality Review Act and the National Environmental Policy Act.

While the general goals and outlines of the Transitway have been identified, many of the specifics of the Transitway have yet to be finalized. For example, NYCDOT has not designated preferred traffic diversion routes or truck circulation routes. Signal timing changes have yet to be identified. Curbside regulations and turn restrictions associated with the Transitway also have not been finalized. These as yet undetermined conditions will have a substantial effect on how traffic will move through the study area. Moreover, the public review processes and environmental review required for the Transitway could result in modifications to the project as currently envisioned. Accordingly, it is not possible at this time to conduct a quantitative analysis that would accurately reflect traffic conditions in the study area with the proposed project if the Transitway is implemented.

In general, if intersections where the proposed project would result in additional trips take on increased traffic volumes due to the Transitway project, it is possible that implementation of the Transitway would result in the proposed project having additional or different traffic impacts at these intersections. At the same time, since the Transitway project will remove traffic from 34th Street, it is possible that significant adverse impacts at intersections along 34th Street caused by the proposed project will no longer exist. Therefore, at this time it is not possible to judge whether the total number of significant adverse impacts will increase or decrease as a result of the Transitway project.

If the Transitway is implemented, the applicant will undertake an additional traffic study to determine whether the mitigation identified in the FEIS for the proposed project would need to be adjusted due to a changed condition along 34th Street. This traffic study will utilize all recently collected data in the 34th Street corridor for the environmental review of the Transitway and will supplement these data with additional traffic counts and levels of service analysis, as necessary. The applicant's obligation to undertake an additional traffic study in the event that the Transitway is implemented will be set forth in the Restrictive Declaration.

FIRST AVENUE/SECOND AVENUE SELECT BUS SERVICE (SBS) CORRIDORS

After the certification of the DEIS, NYCDOT announced plans to implement Select Bus Service Corridors along First and Second Avenues, connecting South Ferry in Lower Manhattan to 125th Street. This SBS program, scheduled to be completed in 2011, is designed to enhance transit service while increasing bicycle access and improving pedestrian safety. The potential design alternatives each include a dedicated bus lane with a shared/protected bike lane. Intersection geometry at the intersections of 34th Street and First and Second Avenues were updated to reflect the preferred design alternative supplied by NYCDOT, however, the plans for the SBS have yet to be finalized. To the extent that the geometry or signal timing/phasing on 34th Street intersections at First and Second Avenues and at the FDR Drive differ from that which is analyzed in this FEIS, and these geometric changes could cause project generated trips to create significant adverse traffic impacts not disclosed in the FEIS, such changes will be taken into account in the additional traffic study discussed above.

SEVENTH AVENUE ROADWAY MODIFICATIONS



NYCDOT is planning to implement pedestrian safety improvements on Seventh Avenue from West 31st to West 34th Streets, consisting of corner bulb-outs to increase pedestrian circulation space on street corners and curblines relocations to widen sidewalks. As part of this plan, the southeast corner of Seventh Avenue at West 33rd Street and the northeast corner of Seventh Avenue at West 32nd Street will be bulbed out, increasing the area of pedestrian refuge at these street corners.

PEAK HOUR TRAFFIC VOLUMES

Traffic volumes on the study area roadway network in the No Action condition were derived through a combination of background traffic growth and traffic projected to be generated by specific developments anticipated to be completed by 2014. A description of No Action (or “No Build”) development projects whose projected trips were included in the traffic volume networks in the No Action analysis is provided in Chapter 2, “Procedural and Analytical Framework.”




For the 2014 analysis traffic forecasts, a cumulative background growth rate of approximately 3.0 percent was applied to 2008 conditions to represent background growth occurring over the 2008 to 2014 period.

Figures 16-13 through 16-20 provide the 2014 No Action traffic volumes for the typical weekday AM (8 to 9 AM), midday (12 to 1 PM), PM (5 to 6 PM) and typical Saturday midday (1 to 2 PM) peak hours, respectively, in the study area.

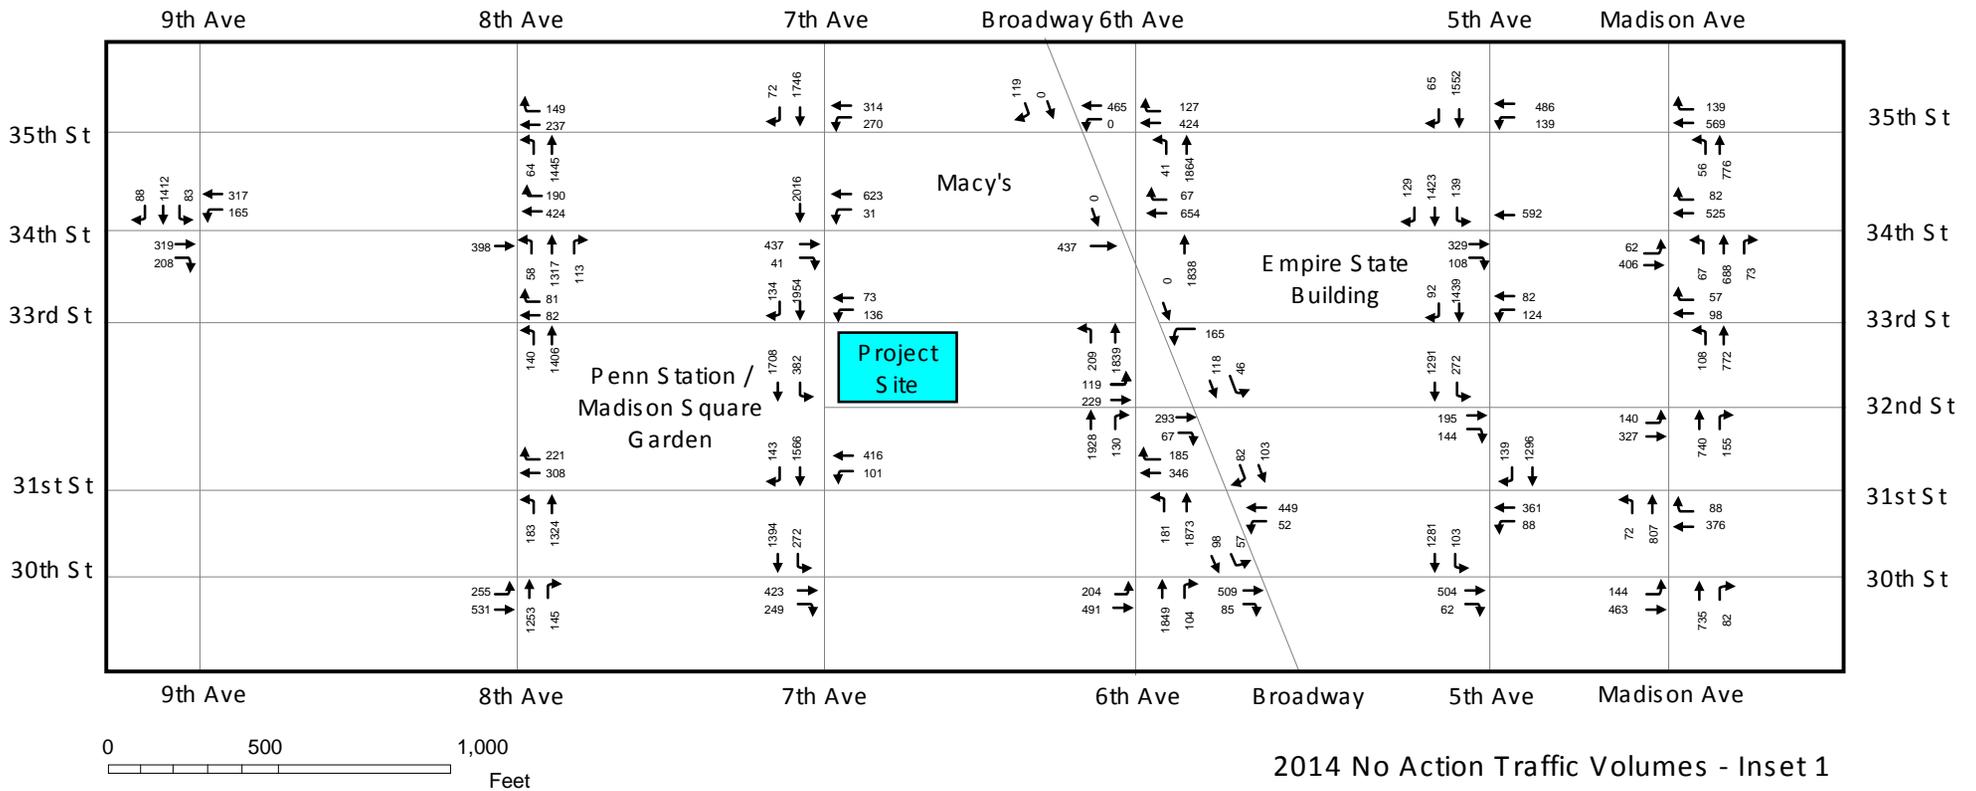

15 PENN PLAZA



Figure 16-13

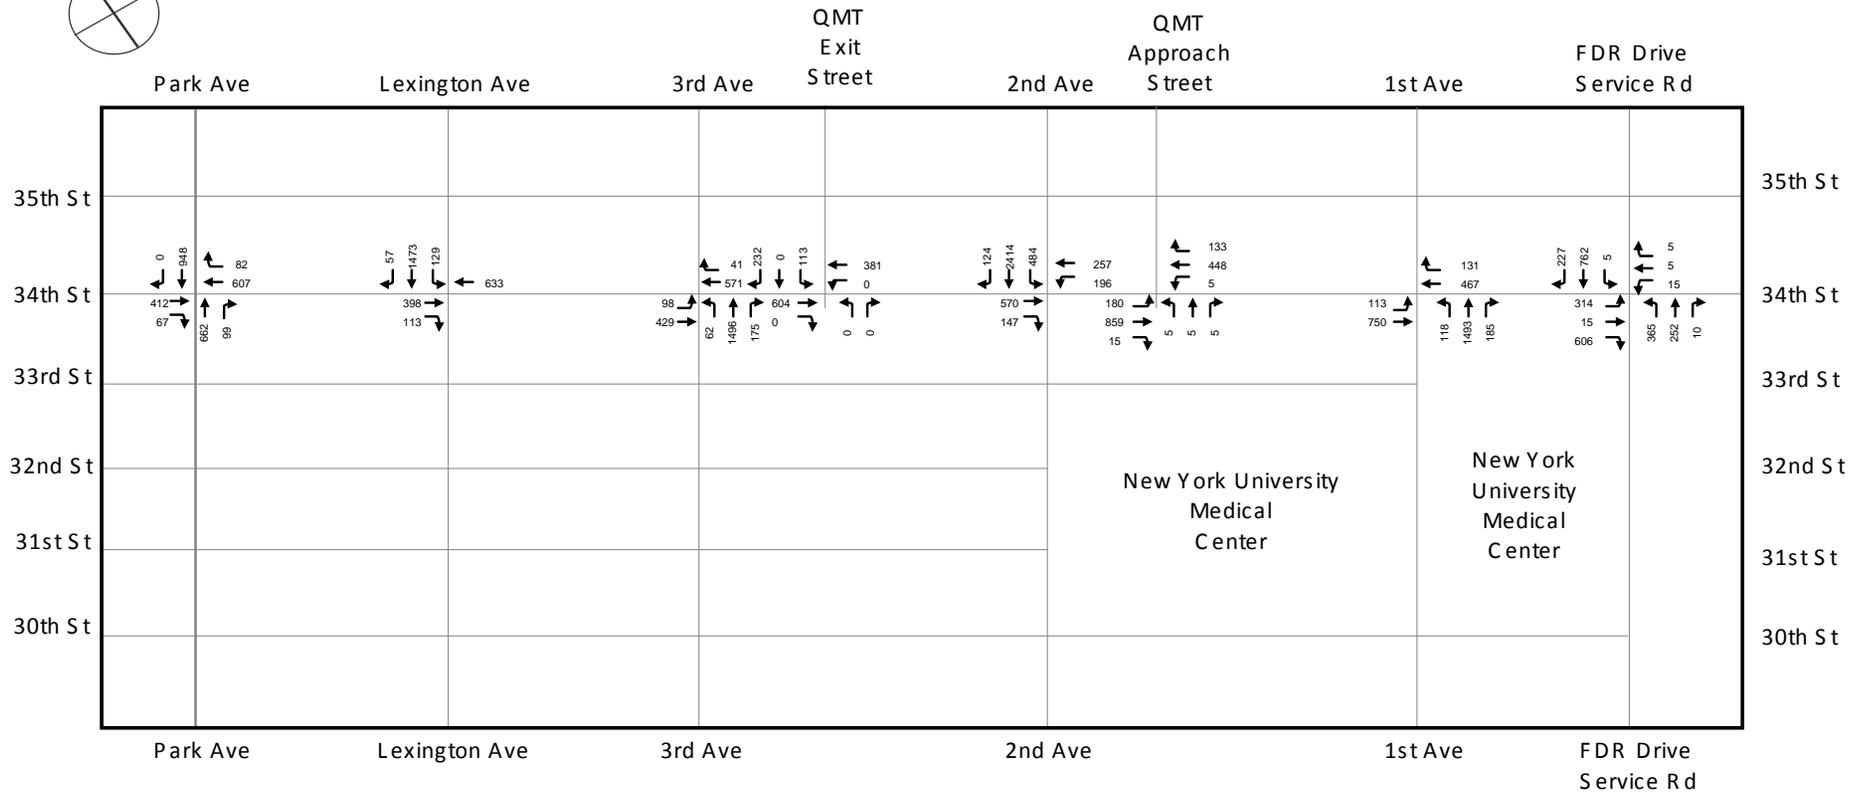

2014 No Action Traffic Volumes - Inset 2
(Weekday AM Peak Hour)

15 PENN PLAZA

Figure 16-14

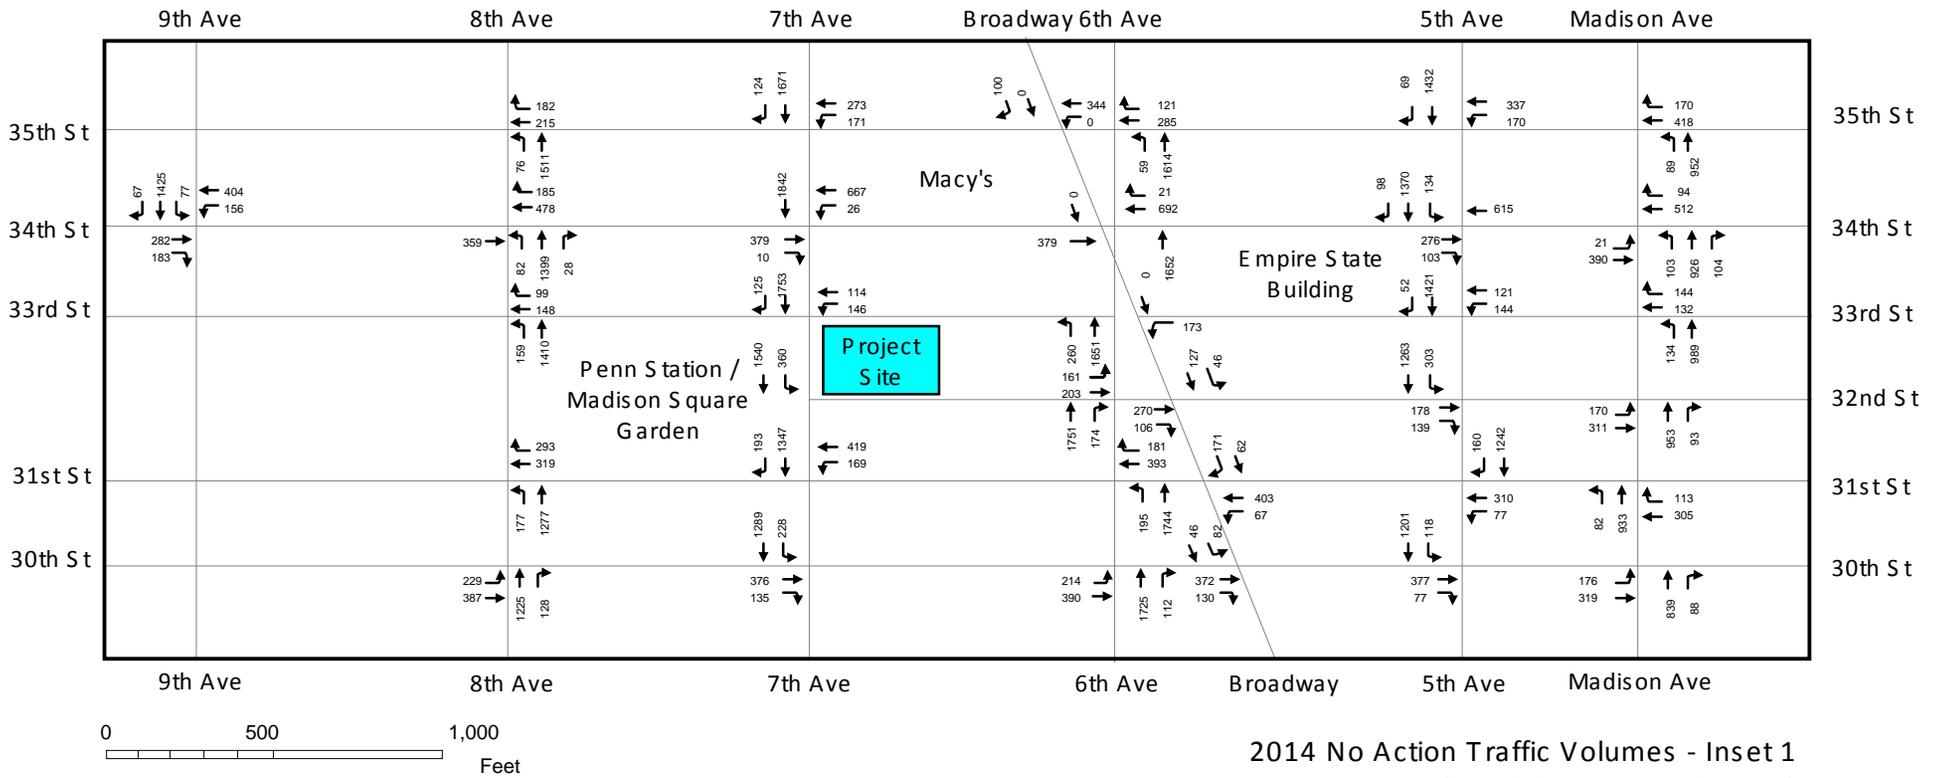



2014 No Action Traffic Volumes - Inset 1
(Weekday MD Peak Hour)

Figure 16-15



15 PENN PLAZA

15 Penn Plaza FEIS

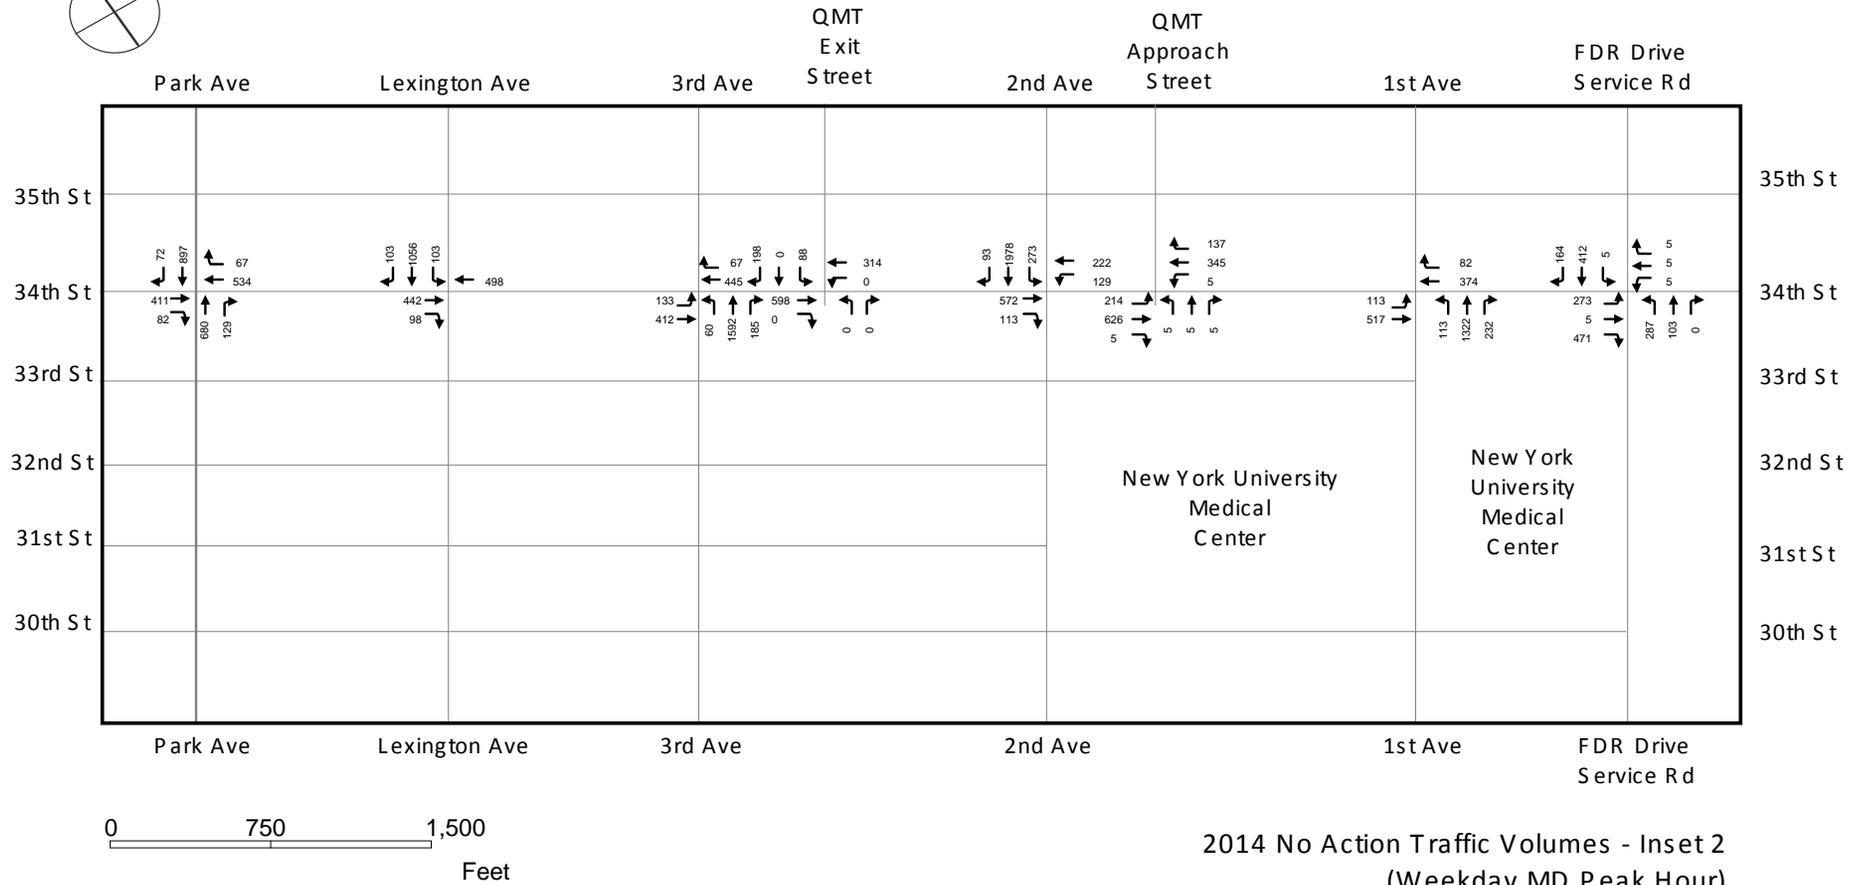

15 PENN PLAZA



Figure 16-16

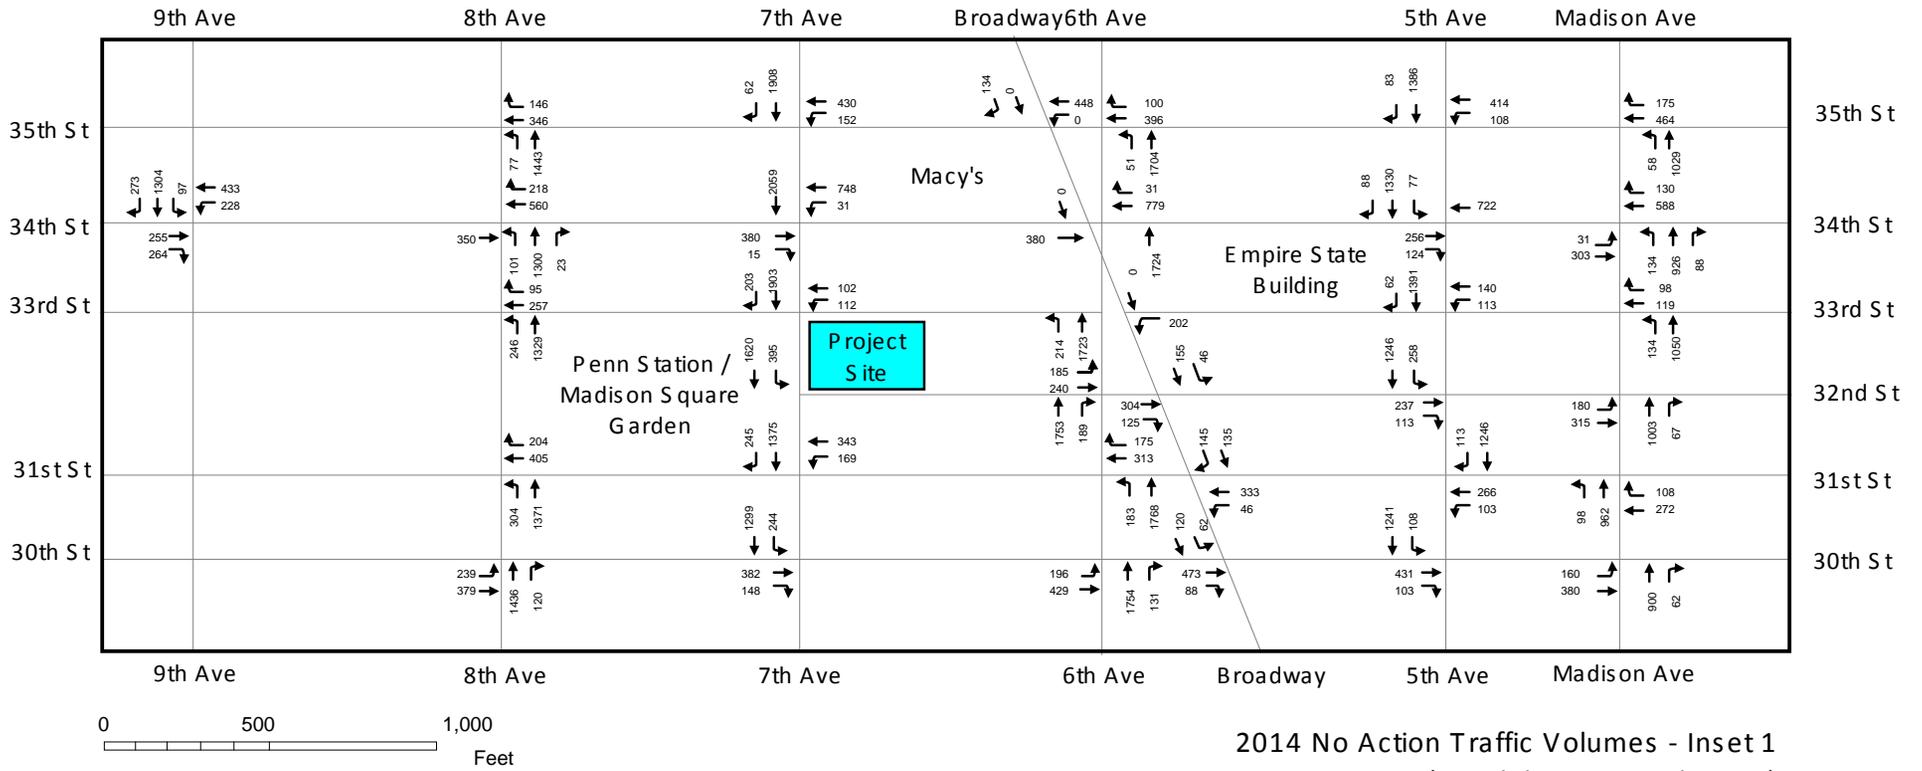

15 PENN PLAZA



Figure 16-17

15 Penn Plaza FEIS

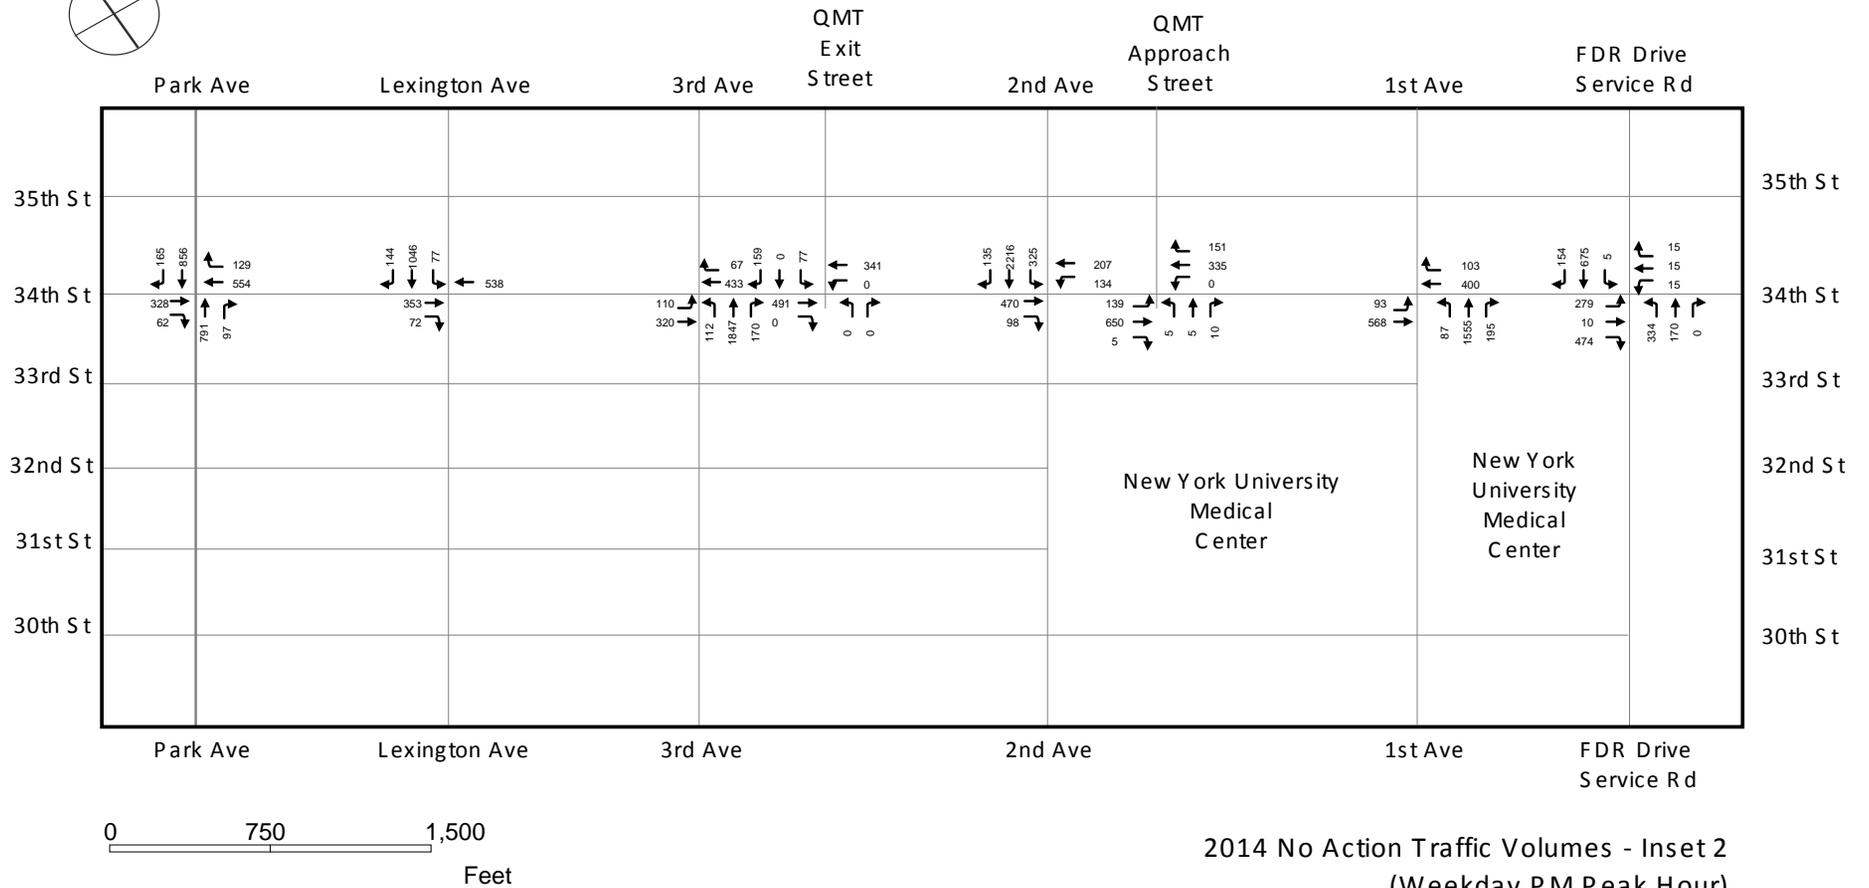

15 PENN PLAZA




Figure 16-18

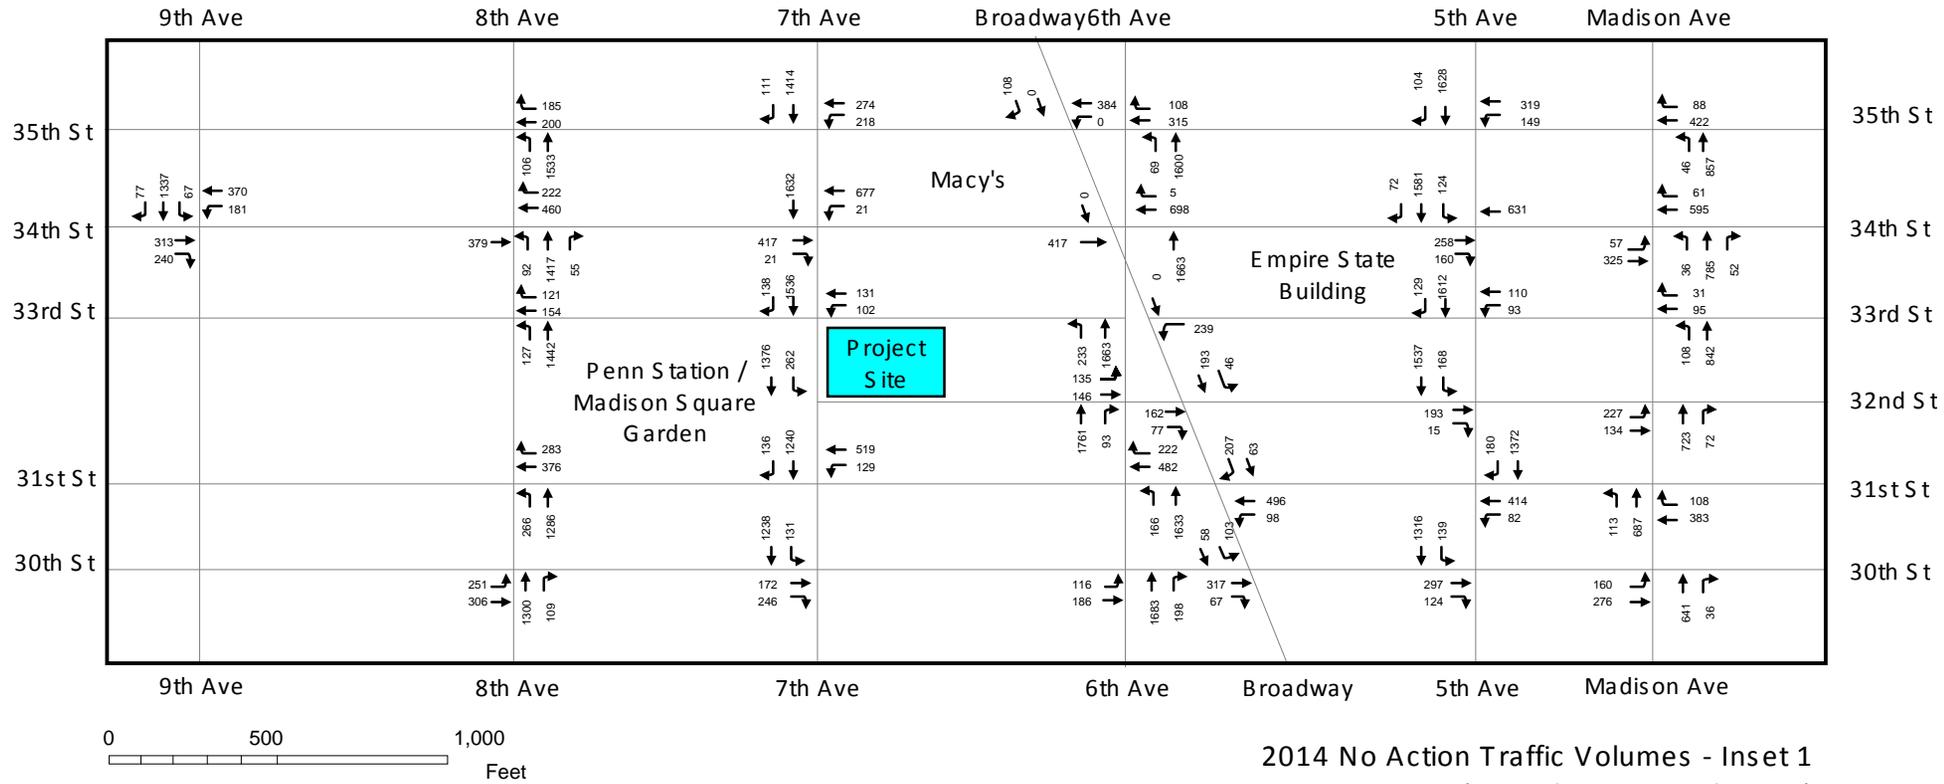

15 PENN PLAZA

Figure 16-19

15 Penn Plaza FEIS

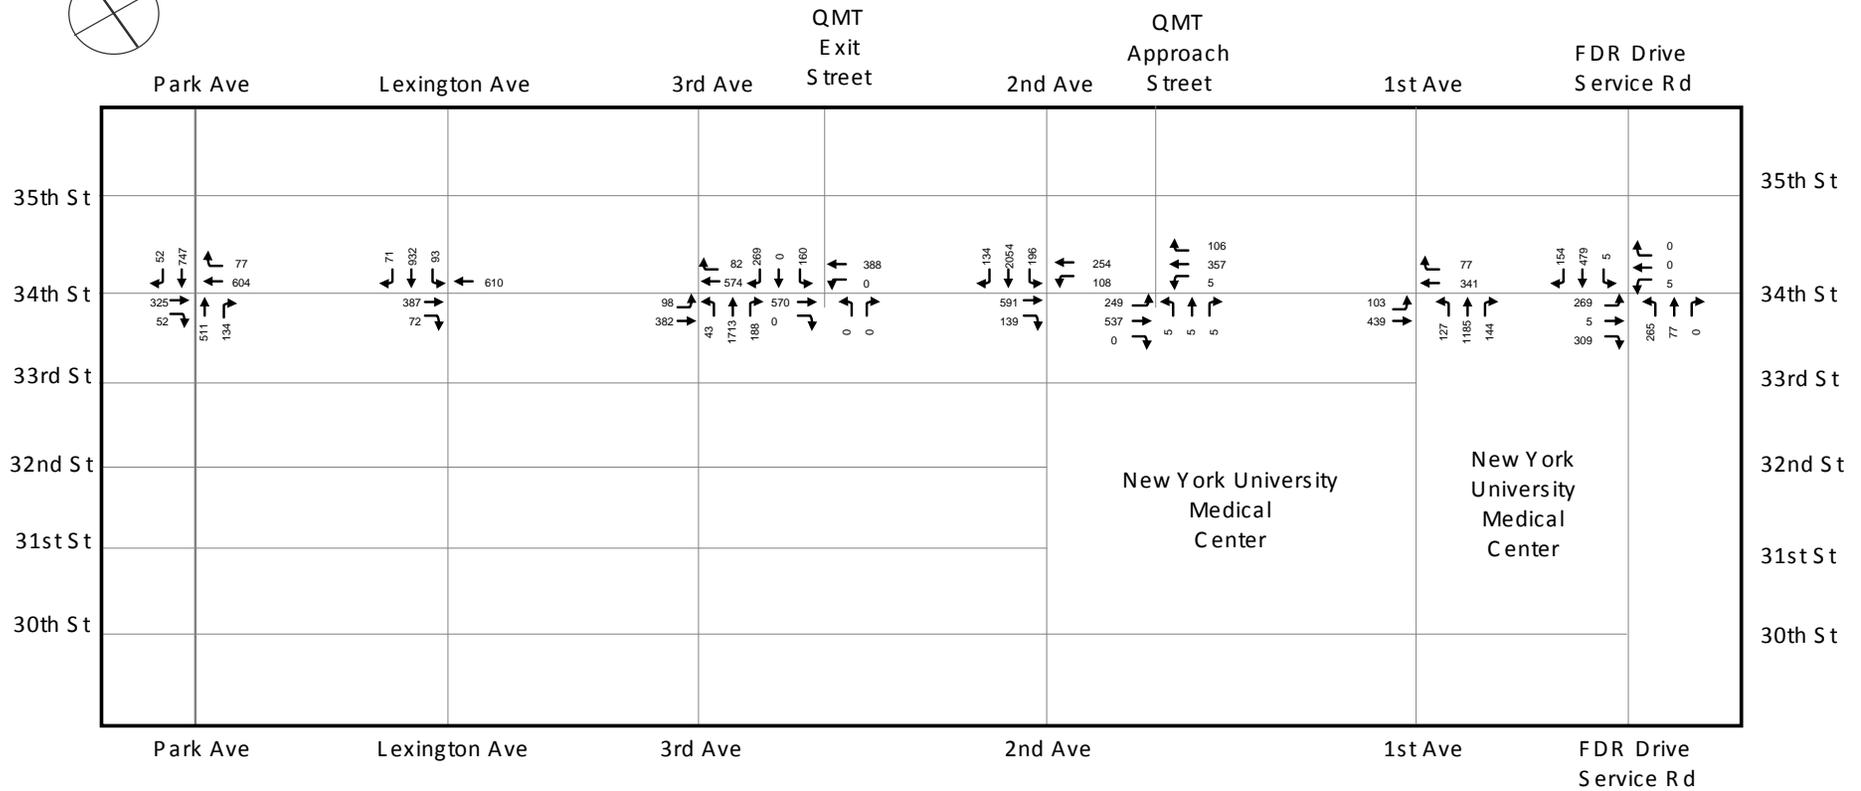

2014 No Action Traffic Volumes - Inset 2
(Saturday MD Peak Hour)

15 PENN PLAZA

Figure 16-20

LEVEL OF SERVICE ANALYSIS

An intersection capacity and level of service analysis was conducted for the 43 study area intersections. The following summarizes the analysis results by travel corridor and details the locations with substandard operating levels (marginally unacceptable mid-LOS D or more than 45 seconds of average delay) by analysis time period.

SUMMARY OF ANALYSIS RESULTS

Although most intersections in the traffic study area operate at overall acceptable levels during the four analysis peak hours, individual approach movements at numerous intersections operate at mid-LOS D or worse. Overall, of the 145 approach movements analyzed, 43 approach movements operate at mid-LOS D or worse in the AM peak hour, 24 approach movements operate at mid-LOS D or worse in the midday peak hour, 35 approach movements operate at mid-LOS D or worse in the PM peak hour, and 29 approach movements operate at mid-LOS D or worse in the Saturday midday peak hour. These findings are presented in **Table 16-13**.

Table 16-13
2014 No Action

Number of Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Level of Service	Analysis Hour			
	AM	Weekday Midday	PM	Saturday Midday
Mid-LOS D	8	2	8	5
LOS E	11	9	7	12
LOS F	24	13	20	12

Detailed analysis results, including the v/c ratio, delay, and LOS, for intersections with one or more approach or lane group operating at mid-LOS D or worse are provided in **Table 16-14** for the weekday AM, midday, PM, and Saturday midday peak periods.

Table 16-14
2014 No Action

Intersection Approach Movements Operating at Mid-LOS D, LOS E, or LOS F

Intersection	Approach	Weekday AM				Weekday MD				Weekday PM				Saturday MD			
		Movt.	V/C	Delay	LOS	Movt.	V/C	Delay	LOS	Movt.	V/C	Delay	LOS	Movt.	V/C	Delay	LOS
			Ratio	(spv)			Ratio	(spv)			Ratio	(spv)			Ratio	(spv)	
Ninth Ave & 34th St	EB	R	1.02	163.3	F	R	0.90	68.1	E	R	1.26	405.4	F	R			
Eighth Ave & 30th St	EB	T	1.04	221.6	F	T	0.72	310.6	F	T	0.73	330.9	F	T			
Eighth Ave & 31st St	WB	TR	1.18	383.8	F	TR	1.37	467.0	F	TR	1.29	417.8	F	TR	1.34	639.3	F
Eighth Ave & 33rd St	NB	LT				LT				LT	1.01	89.7	F	LT	0.90	58.1	E
Eighth Ave & 35th St	WB	TR	1.10	437.8	F	TR	0.92	50.7	mid-D	TR	1.35	521.7	F	TR	1.02	153.1	F
Seventh Ave & 30th St	EB	T	0.89	45.2	mid-D	T				T	0.79	166.8	F	T			
Seventh Ave & 31st St	SB	TR (T)				TR (T)				R	0.53	212.9	F	R			
Seventh Ave & 33rd St	WB	LT	1.06	318.7	F	LT	1.19	681.2	F	LT	0.95	79.6	E	LT	0.94	72.8	E
Seventh Ave & 33rd St	SB	TR (T)				TR (T)				R	1.08	283.7	F	TR (T)			
Seventh Ave & 34th St	EB	T				T				T				T	0.71	274.4	F
Seventh Ave & 35th St	WB	L	0.95	70.2	E	L				L				L	0.84	53.1	mid-D
Seventh Ave & 35th St	WB	T	0.41	45.3	mid-D	T				T				T			
Broadway & 31st St	WB	LT	1.04	217.3	F	LT	1.02	146.2	F	LT				LT	1.22	344.9	F
Broadway & 31st St	SB	TR				TR	0.90	56.6	E	TR	0.89	50.3	mid-D	TR	1.17	269.4	F
Broadway & 33rd St	WB	L	0.74	52.4	mid-D	L	0.77	55.2	E	L	0.81	56.8	E	L	0.99	88.8	F
Sixth Ave & 30th St	EB	L	0.87	59.3	E	L	0.93	516.1	F	L	0.81	418.2	F	L	0.46	231.3	F
Sixth Ave & 30th St	EB	T	1.00	68.5	E	T	0.79	170.8	F	T	0.86	200.4	F	T	0.37	69.3	E
Sixth Ave & 31st St	WB	TR				TR				TR				TR	0.91	75.2	E
Sixth Ave & 32nd St	EB	LT	1.14	515.8	F	LT	1.13	492.3	F	LT	1.38	608.8	F	LT	0.89	56.1	E
Sixth Ave & 33rd St	NB	L	0.76	50.0	mid-D	L	0.92	69.2	E	L	0.77	51.4	mid-D	L	0.79	51.9	mid-D
Sixth Ave & 34th St	EB	T	0.96	61.7	E	T	0.95	61.2	E	T				T	0.94	272.4	F
Sixth Ave & 34th St	NB	R	0.69	57.0	E	R				R				R			
Sixth Ave & 35th St	WB	TR	1.26	470.8	F	TR	0.99	67.2	E	TR	1.13	421.7	F	TR	0.94	55.9	E
Fifth Ave & 30th St	EB	TR	1.36	413.4	F	TR	1.22	378.9	F	TR	1.32	402.0	F	TR	1.15	354.4	F
Fifth Ave & 31st St	WB	T	0.89	50.4	mid-D	T				T				T	0.99	69.5	E
Fifth Ave & 32nd St	EB	R	0.74	46.8	mid-D	R				R				R			
Fifth Ave & 33rd St	WB	LT	0.89	64.8	E	LT	1.10	389.2	F	LT	1.00	86.6	F	LT	0.78	48.3	mid-D
Fifth Ave & 35th St	WB	L	0.81	68.1	E	L	0.97	97.4	F	L	0.58	47.3	mid-D	L	0.81	66.7	E
Fifth Ave & 35th St	WB	T	1.12	253.9	F	T				T	0.91	49.6	mid-D	T			
Madison Ave & 30th St	EB	T	1.07	250.0	F	T				T	0.86	46.2	mid-D	T			
Madison Ave & 34th St	EB	L	0.76	69.5	E	L				L				L	0.75	71.2	E
Madison Ave & 34th St	WB	T	0.94	51.2	mid-D	T				T	1.05	182.6	F	T	0.97	55.5	E
Madison Ave & 35th St	WB	T	1.25	281.7	F	T				T	1.00	68.2	E	T			
Madison Ave & 35th St	WB	R	0.88	81.0	F	R	0.80	58.2	E	R	1.08	427.2	F	R	0.52	45.3	mid-D
Park Ave & 34th St	WB	T	1.13	229.4	F	T	1.07	217.8	F	T	1.05	203.4	F	T	1.06	194.9	F
Lexington Ave & 34th St	WB	T	1.22	263.2	F	T				T	1.11	226.9	F	T	1.12	216.8	F
Lexington Ave & 34th St	SB	LT	1.06	129.2	F	LT				LT				LT			
Lexington Ave & 34th St	SB	R				R				R	0.96	77.1	E	R			
Third Ave & 34th St	WB	TR	0.88	45.2	mid-D	TR				TR				TR	0.94	52.7	mid-D
Ramp from I-495 & 34th St	SB	L	0.85	81.6	F	L	0.66	58.6	E	L	0.58	52.2	mid-D	L	1.12	387.8	F
Second Ave & 34th St	EB	R	1.16	615.2	F	R	0.86	77.5	E	R	0.76	62.6	E	R	0.81	61.7	E
Second Ave & 34th St	SB	T	1.03	104.1	F	LT				LT				LT			
Ramp to I-495 & 34th St	WB	LT	0.95	65.2	E	LT				LT				LT			
Ramp to I-495 & 34th St	WB	R	1.03	227.6	F	R	1.06	342.0	F	R	1.12	578.8	F	R	0.77	65.9	E
First Ave & 34th St	EB	LT	1.08	254.9	F	LT				LT				LT			
First Ave & 34th St	EB	R	0.89	80.1	F	R				R	0.70	53.2	mid-D	R			
FDR Drive & 34th St	EB	L	1.07	347.9	F	L	0.99	91.4	F	L	1.04	243.2	F	L			
FDR Drive & 34th St	EB	LTR	0.94	73.8	E	LTR	0.75	48.6	mid-D	LTR	0.78	51.9	mid-D	LTR			
FDR Drive & 34th St	NB	L	1.15	212.1	F	L				L	0.97	55.7	E	L			

Shading denotes approach movements at nos LOS Mid-D, E, or F.
LOS = Level of Service

PARKING

Future off-street parking demand was calculated by adding existing parking demand, increased due to background growth, and parking demand from No Action development projects within the study area. Hourly parking accumulation profiles were calculated for each No Action project within the study area or that may impact off-street facilities in the study area. The background demand for parking in

the study area is projected to grow at a rate equivalent to background vehicular traffic. Overall, background parking demand is projected to increase by 3.0 percent between 2008 and 2014.

As noted in the discussion of existing conditions above, most of the parking study area’s curbside regulations restrict weekday daytime usage to commercial loading/unloading activities and authorized vehicles, or prohibit parking overall. This condition is not expected to change in the future, and no on-street parking availability was assumed in the future.

Due to background growth in parking demand and parking demand generated by developments assumed to be completed by 2014 in the No Action condition, off-street parking is anticipated to be more highly utilized. As shown in **Table 16-15**, anticipated 2014 off-street parking facilities have an occupancy rate of 93 percent with approximately 475 available spaces during the weekday midday hour.

Table 16-15
2014 No Action Off-Street Parking Utilization: Weekday Midday

Site	Total Capacity	Demand	Utilization Rate	Available Spaces
Existing	6,479	5,709	89%	706
No Build Site #1	201	201	-	
No Build Site #2	-	139	-	
No Build Site #3	529	106	-	
No Build Site #4	-	68	-	
No Build Site #5	-	4	-	
No Build Site #6	-	15	-	
No Build Site #7	-	34	-	
No Build Site #8	-169	237	-	
No Build Site #9	-	22	-	
No Build Site #13	-	24	-	
15 Penn As of Right	-	7	-	
Total	7,040	6,566	93%	474

E. 2014 FUTURE WITH THE PROPOSED PROJECT

This section presents the projected traffic and parking conditions in the 2014 future with the proposed project.

As discussed earlier in this chapter, the Single-Tenant Office Scenario would generate a higher number of trips during the AM peak hour, with the Multi-Tenant Office Scenario generating a higher number of trips during the weekday midday, PM and Saturday midday peak hours. However, traffic analyses were performed for all peak periods for both the Single-Tenant Office Scenario and the Multi-Tenant Office Scenario. As the comparative levels of parking demand generated by the development scenarios would exhibit greater fluctuation depending on the analysis period, the parking analyses examine the future with the proposed project conditions for both scenarios.

As part of both development scenarios, it is anticipated that a 100-space accessory parking garage will be constructed on the development site. This parking facility would serve only the office uses for the development site.

None of the traffic impacts identified in the FEIS can be solely attributed to black cars. However, under the Single-Tenant Office Scenario, the applicant will develop a black car management plan that will provide for off-site deployment and dispatch of black cars in consultation with NYCDOT. In the Multi-Tenant Office Scenario, the applicant will establish a designated black car loading area. These commitments will be set forth in the Restrictive Declaration. Off-site staging areas for the black car

management plan to be developed in the Single-Tenant Office Scenario cannot be investigated until the building's completion, as sites available today may not be available when needed in the future. Since the majority of black car operations would occur outside of the peak traffic hours, no significant adverse impacts from black car traffic would occur.

PEAK HOUR TRAFFIC VOLUMES



Traffic volumes on the study area roadway network in the 2014 future with the proposed project for both the Single-Tenant Office Scenario and the Multi-Tenant Office Scenario were derived through the addition of incremental vehicle trips generated by the proposed project and the 2014 No Action traffic volumes.

Figures 16-21 through 16-28 provide the 2014 incremental traffic volumes for the future with the proposed project Single-Tenant Office Scenario condition for the typical weekday AM (8 to 9 AM), midday (12 to 1 PM), PM (5 to 6 PM) and typical Saturday midday (1 to 2 PM) peak hours, respectively, in the study area.

Figures 16-29 through 16-36 provide the 2014 future with the proposed project Single-Tenant Office Scenario traffic volumes for the typical weekday AM (8 to 9 AM), midday (12 to 1 PM), PM (5 to 6 PM) and typical Saturday midday (1 to 2 PM) peak hours, respectively, in the study area. These volumes were derived by adding the 2014 No Action condition traffic volumes and the 2014 incremental traffic volumes for the future with the proposed project condition.

Figures 16-37 through 16-44 provide the 2014 incremental traffic volumes for the future with the proposed project Multi-Tenant Office Scenario condition for the typical weekday AM (8 to 9 AM), midday (12 to 1 PM), PM (5 to 6 PM) and typical Saturday midday (1 to 2 PM) peak hours, respectively, in the study area.




Figures 16-45 through 16-52 provide the 2014 future with the proposed project Multi-Tenant Office Scenario traffic volumes for the typical weekday AM (8 to 9 AM), midday (12 to 1 PM), PM (5 to 6 PM) and typical Saturday midday (1 to 2 PM) peak hours, respectively, in the study area. These volumes were derived by adding the 2014 No Action condition traffic volumes and the 2014 incremental traffic volumes for the future with the proposed project condition.

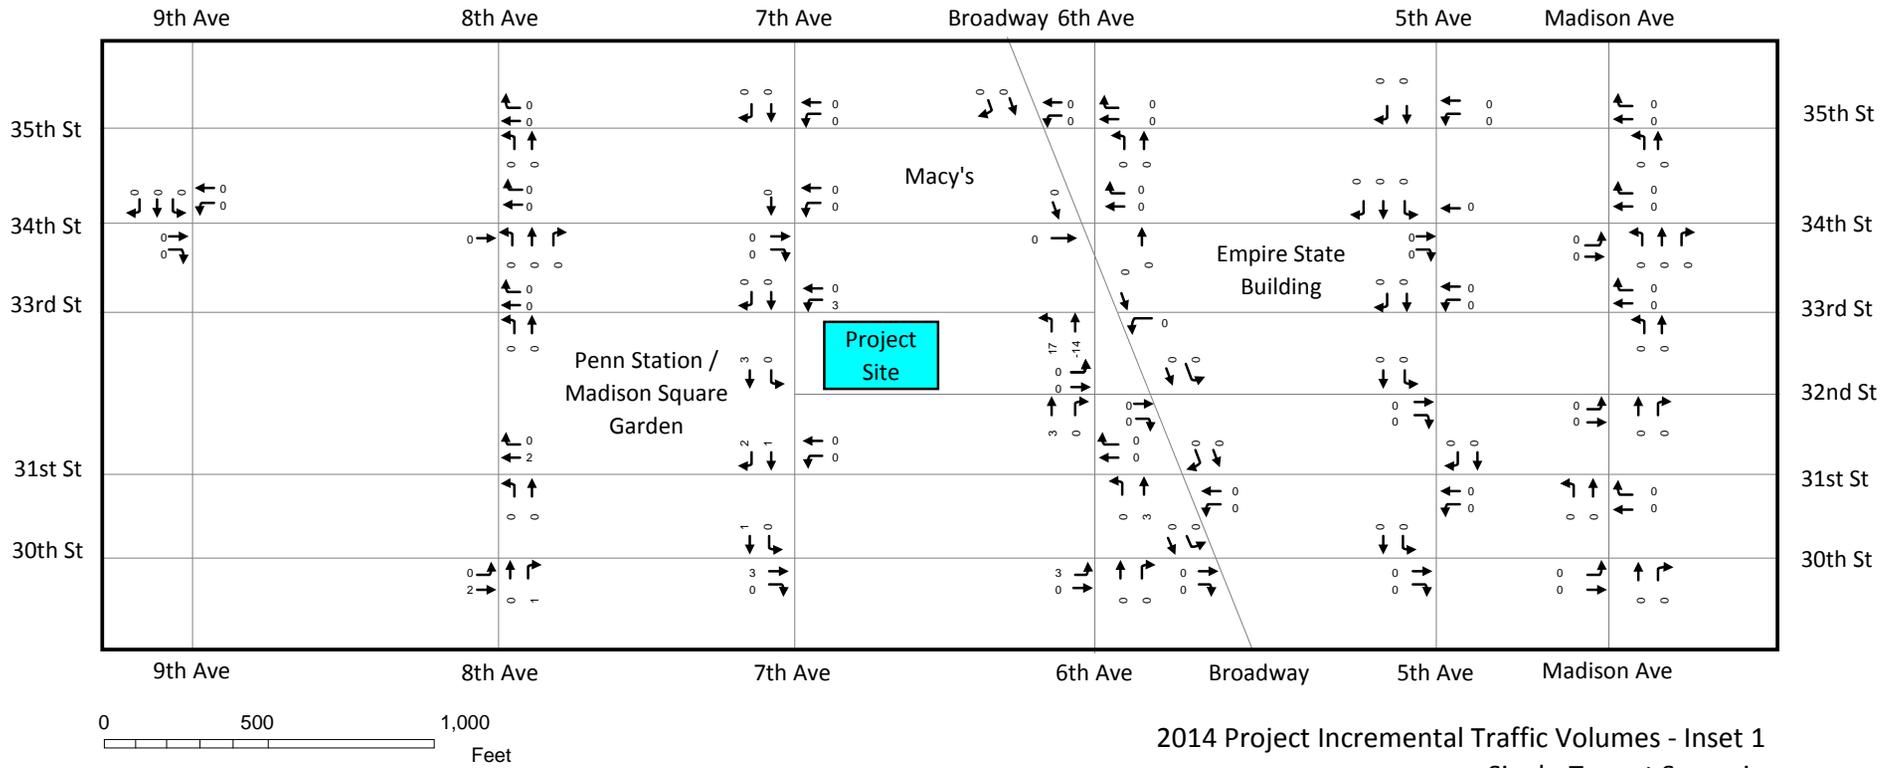

2014 Project Incremental Traffic Volumes - Inset 1
Single-Tenant Scenario
(Weekday MD Peak Hour)

15 PENN PLAZA



Figure 16-23

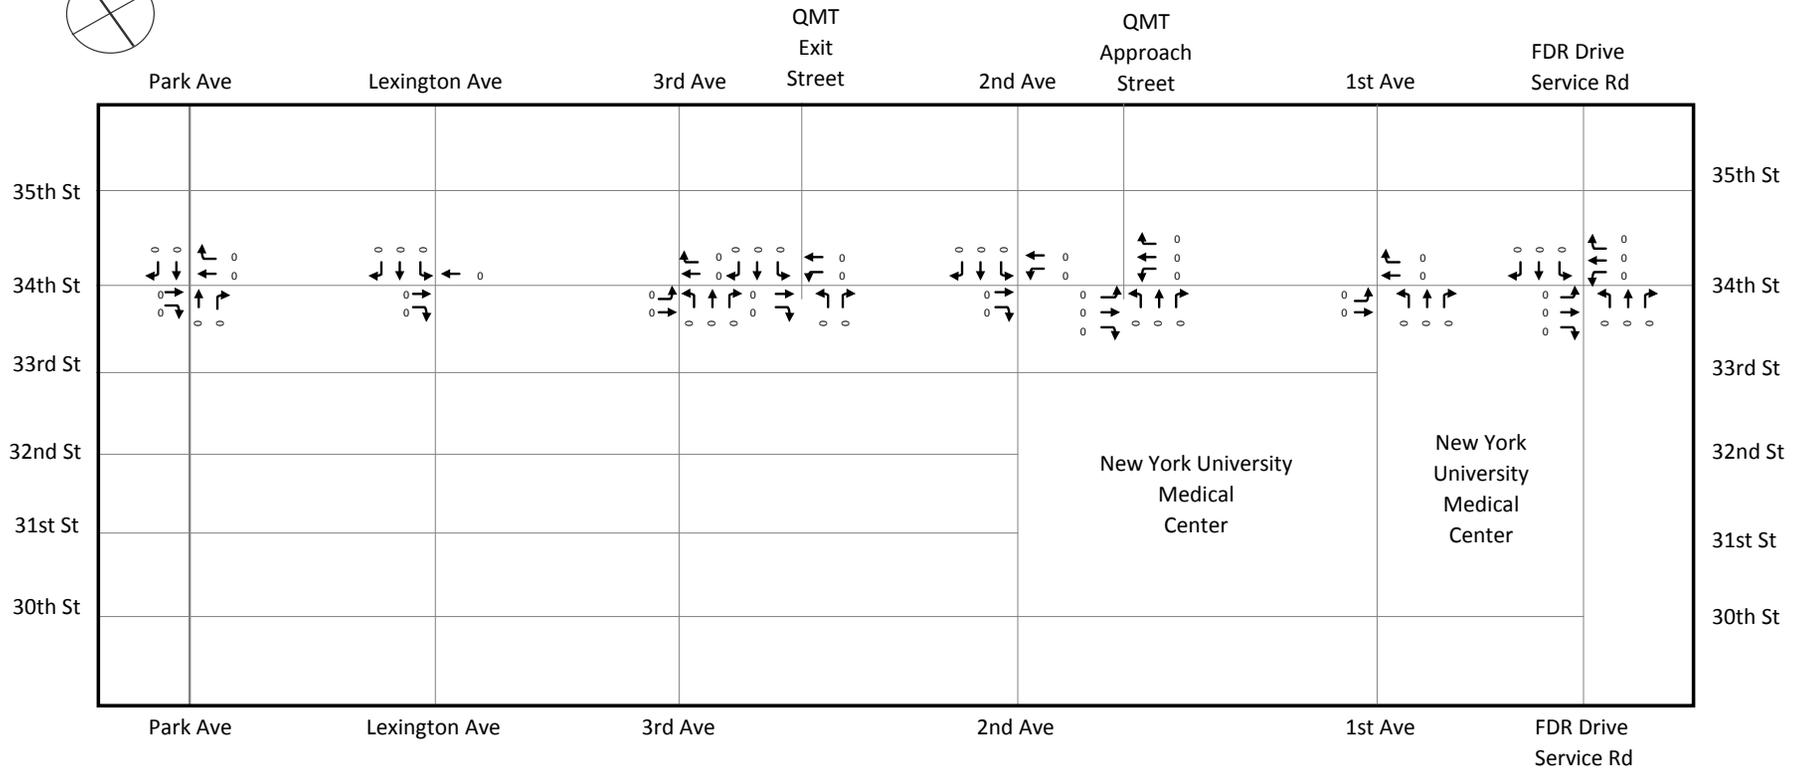

2014 Project Incremental Traffic Volumes - Inset 2
Single-Tenant Scenario
(Weekday MD Peak Hour)

15 PENN PLAZA



Figure 16-24

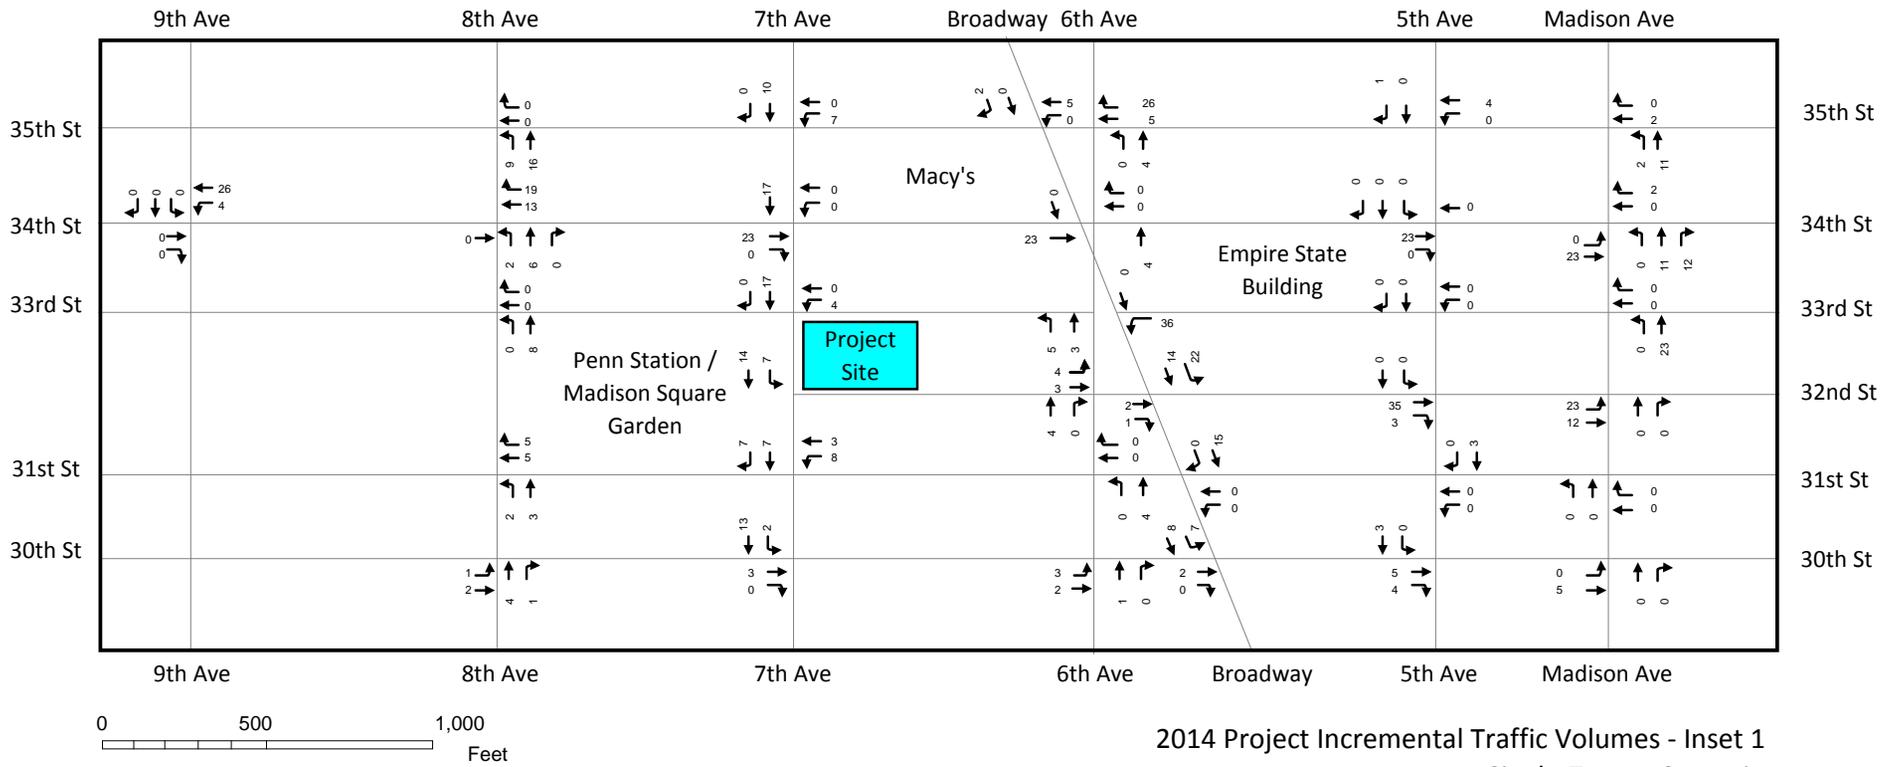

2014 Project Incremental Traffic Volumes - Inset 1
Single-Tenant Scenario
(Weekday PM Peak Hour)

15 PENN PLAZA



Figure 16-25

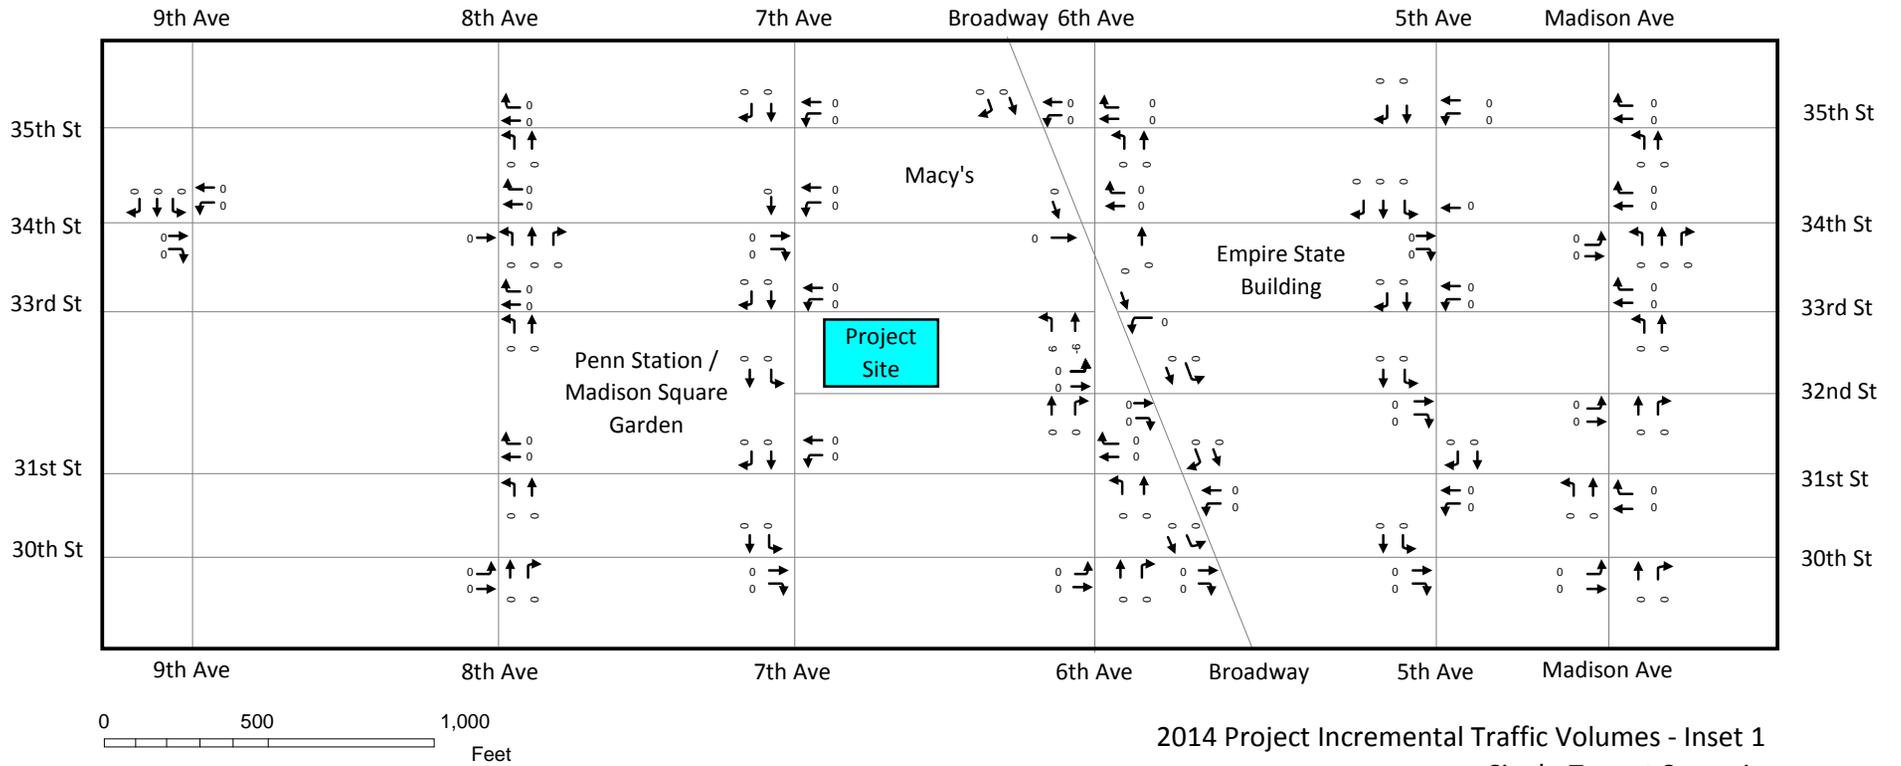

15 PENN PLAZA

Figure 16-27



15 Penn Plaza FEIS

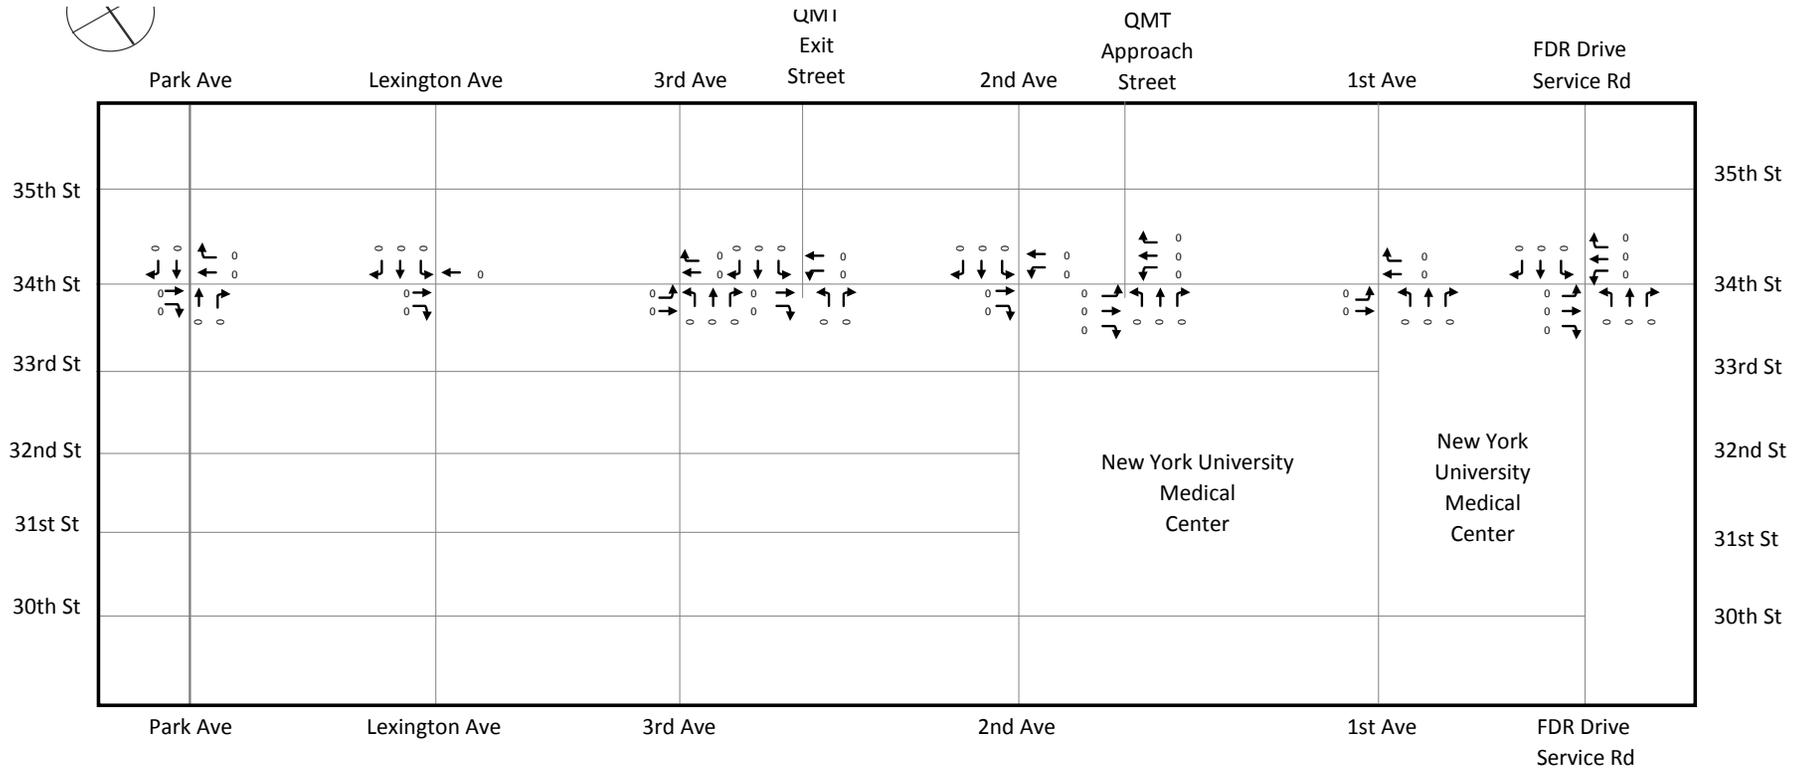

2014 Project Incremental Traffic Volumes - Inset 2
Single-Tenant Scenario
(Saturday MD Peak Hour)

15 PENN PLAZA

Figure 16-28


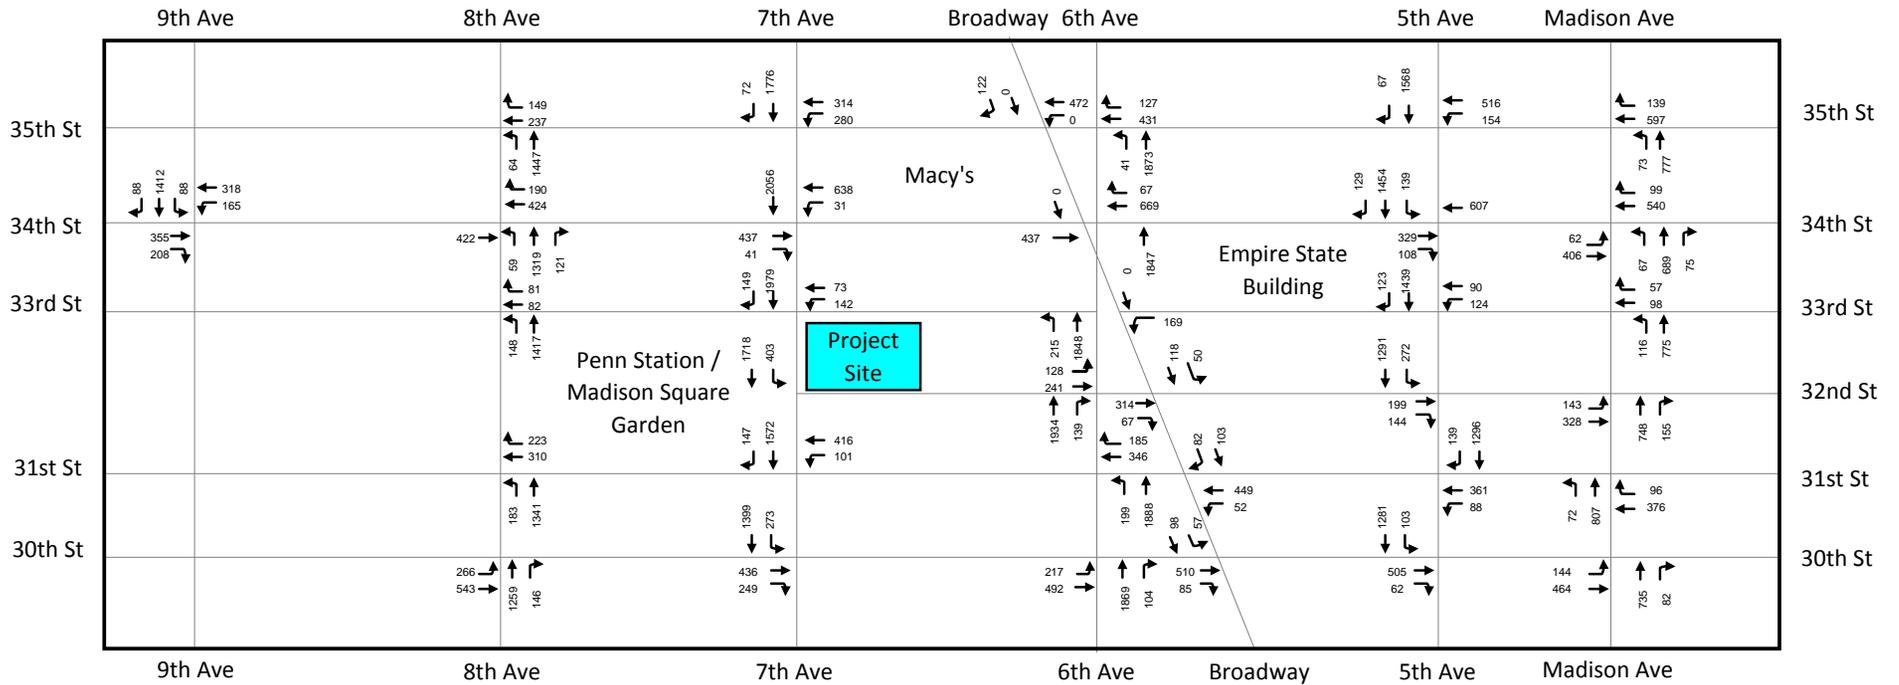



2014 Future with the Proposed Project Traffic Volumes - Inset 1
Single-Tenant Scenario
(Weekday AM Peak Hour)

15 PENN PLAZA

Figure 16-29



15 Penn Plaza FEIS

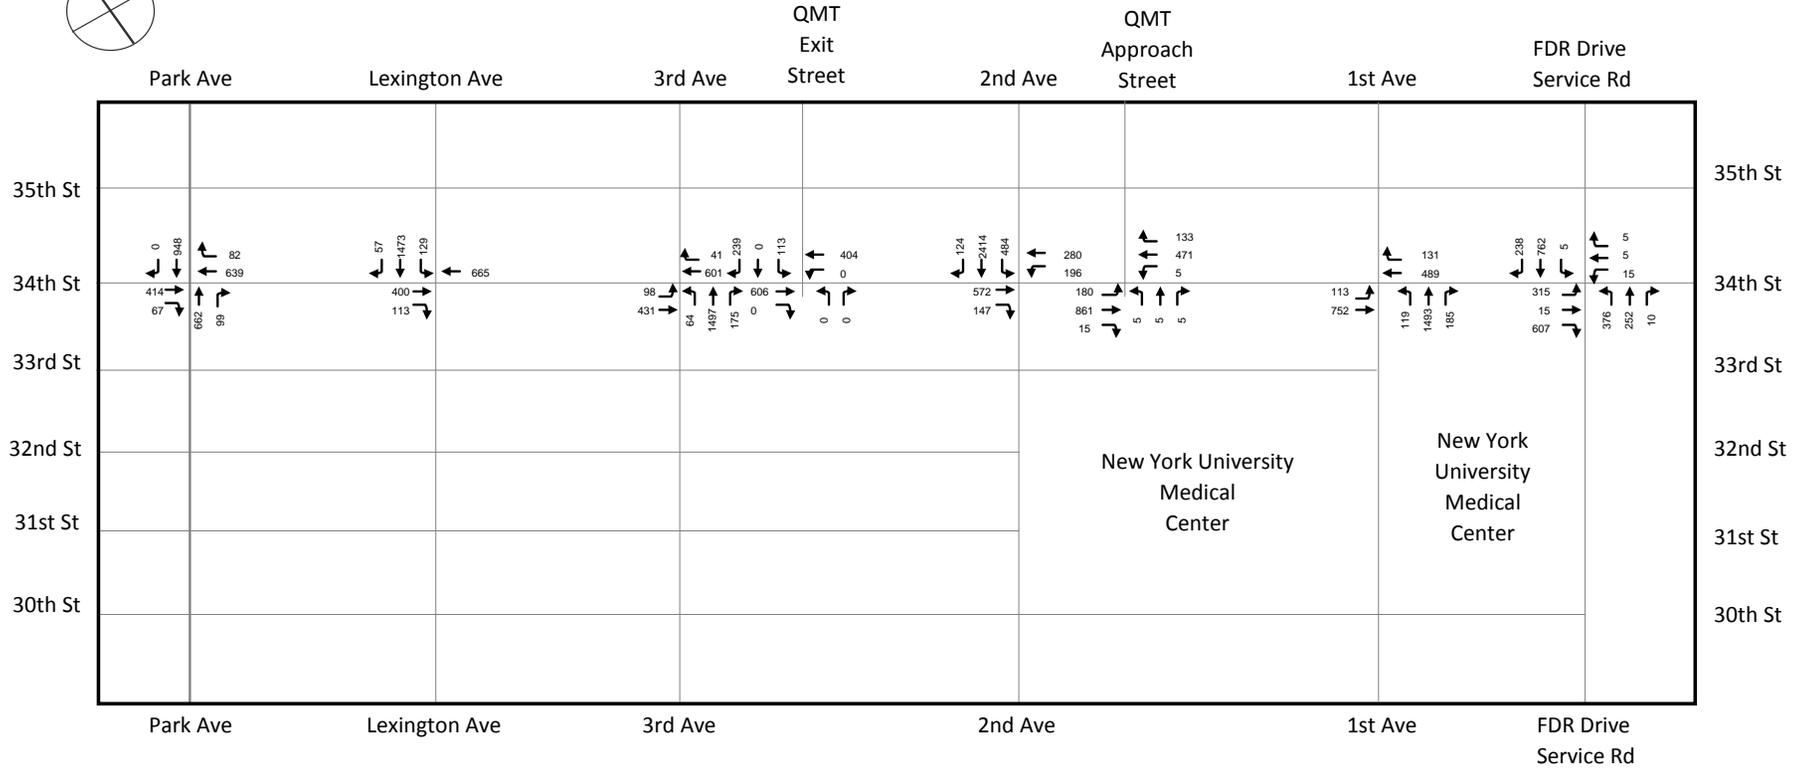

2014 Future with the Proposed Project Traffic Volumes - Inset 2
 Single-Tenant Scenario
 (Weekday AM Peak Hour)

15 PENN PLAZA

Figure 16-30


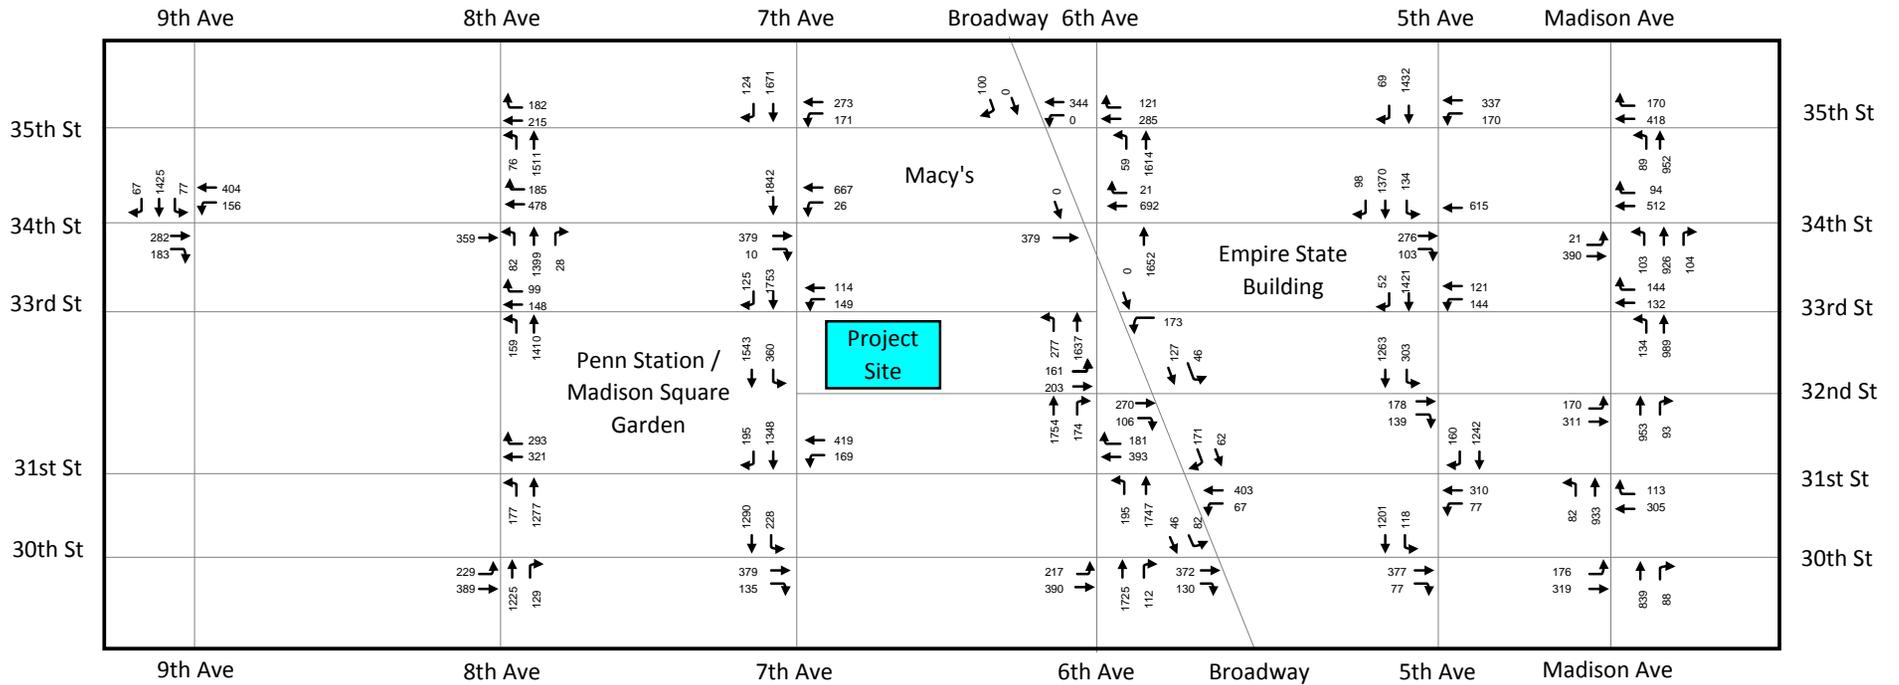



2014 Future with the Proposed Project Traffic Volumes - Inset 1
 Single-Tenant Scenario
 (Weekday MD Peak Hour)

15 PENN PLAZA

Figure 16-31



15 Penn Plaza FEIS

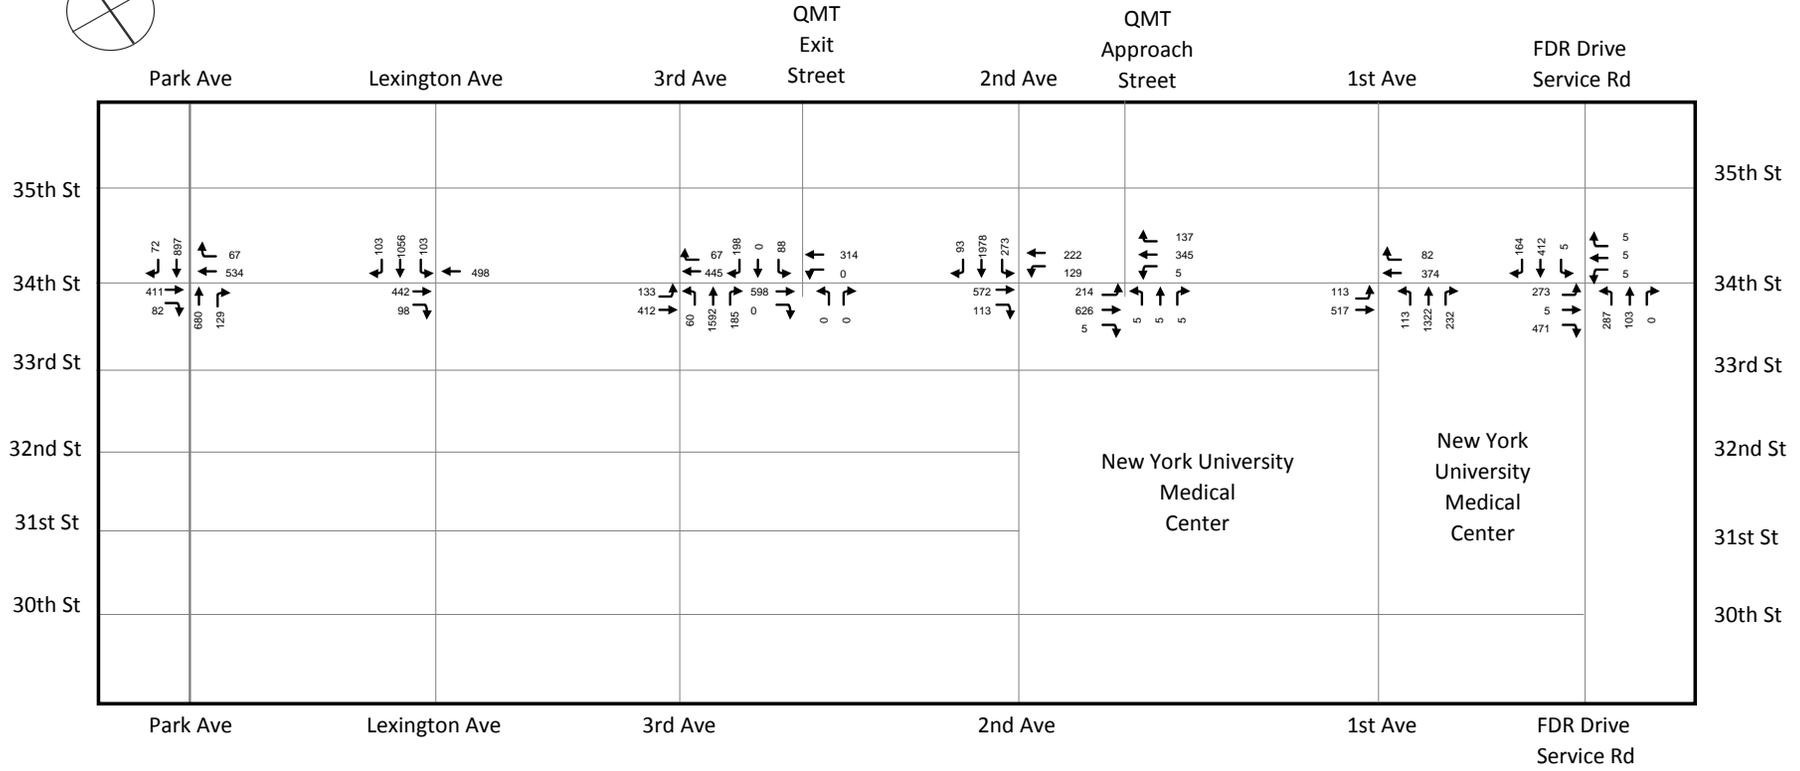

2014 Future with the Proposed Project Traffic Volumes - Inset 2
 Single-Tenant Scenario
 (Weekday MD Peak Hour)

15 PENN PLAZA

Figure 16-32


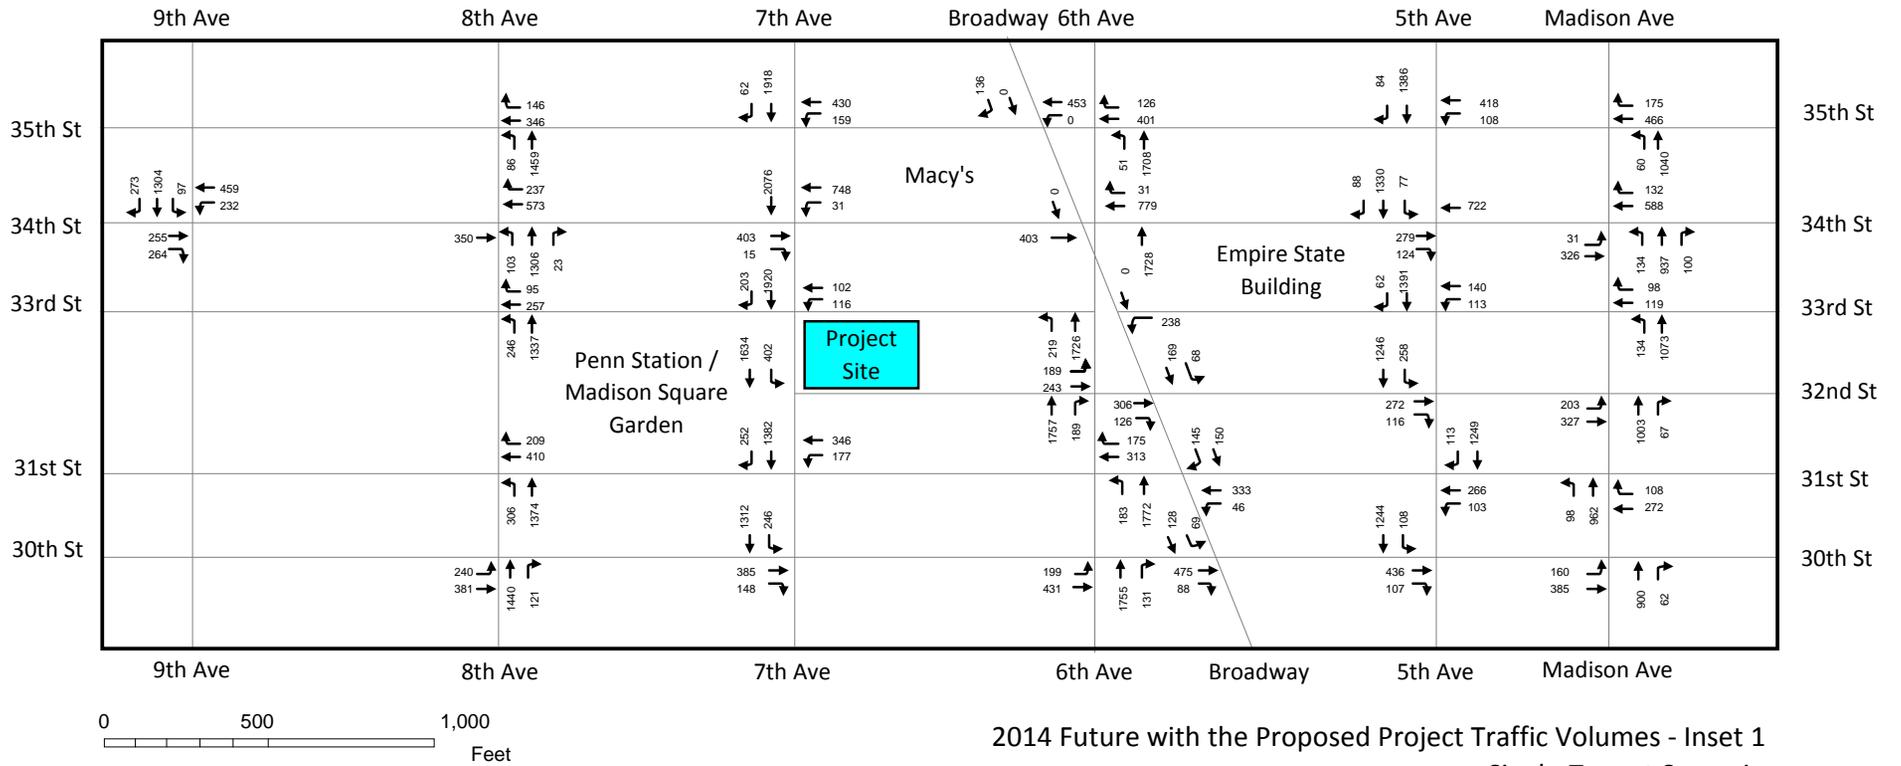



2014 Future with the Proposed Project Traffic Volumes - Inset 1
Single-Tenant Scenario
(Weekday PM Peak Hour)

15 PENN PLAZA

Figure 16-33



15 Penn Plaza FEIS

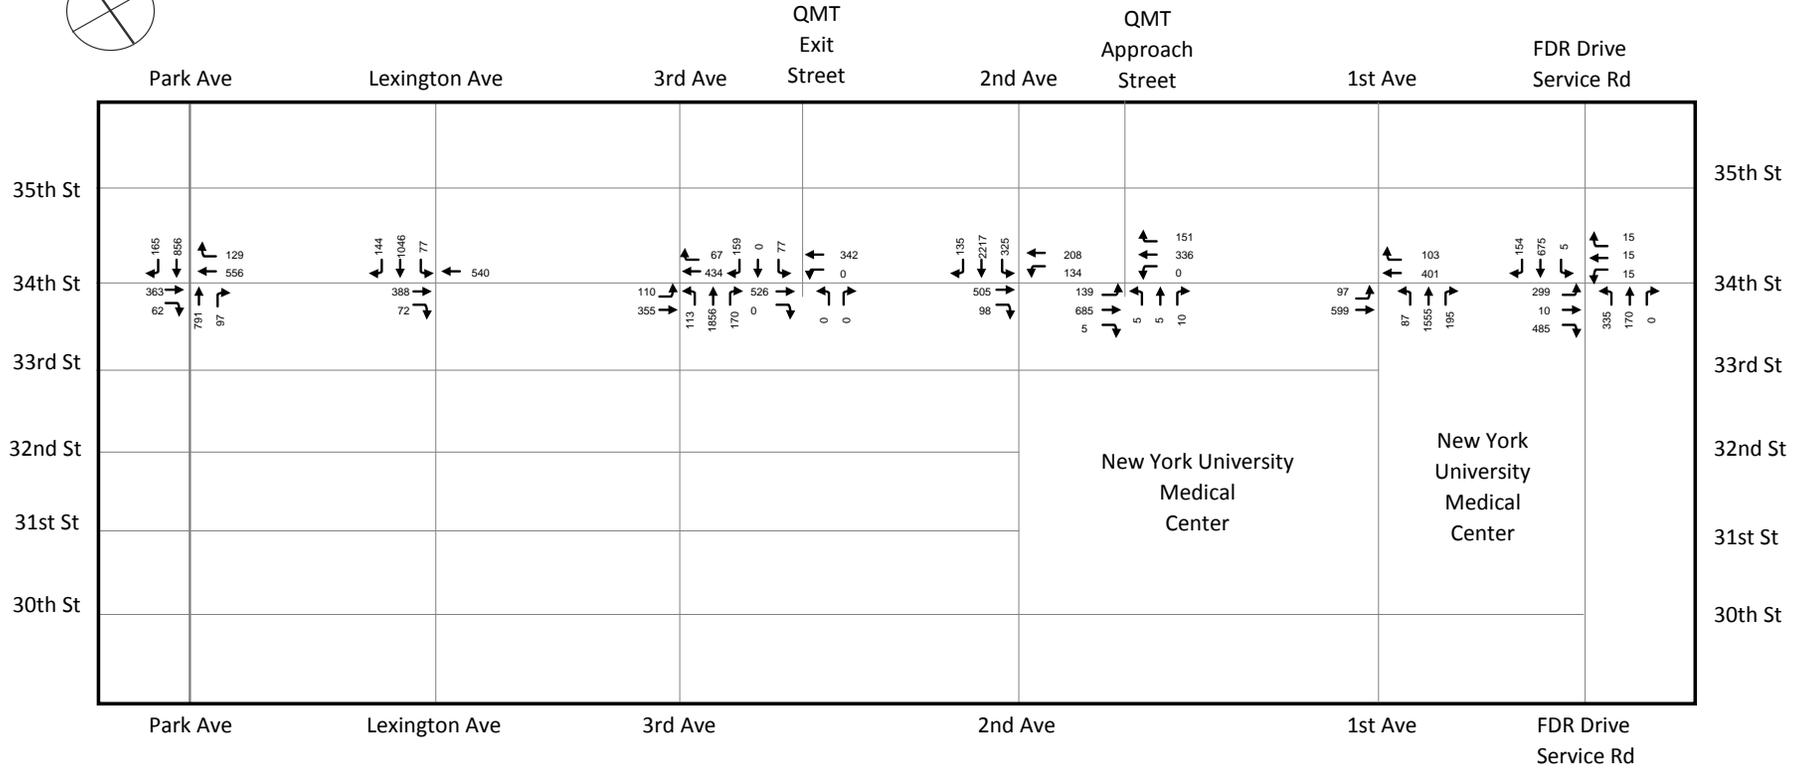

2014 Future with the Proposed Project Traffic Volumes - Inset 2
 Single-Tenant Scenario
 (Weekday PM Peak Hour)

15 PENN PLAZA

Figure 16-34


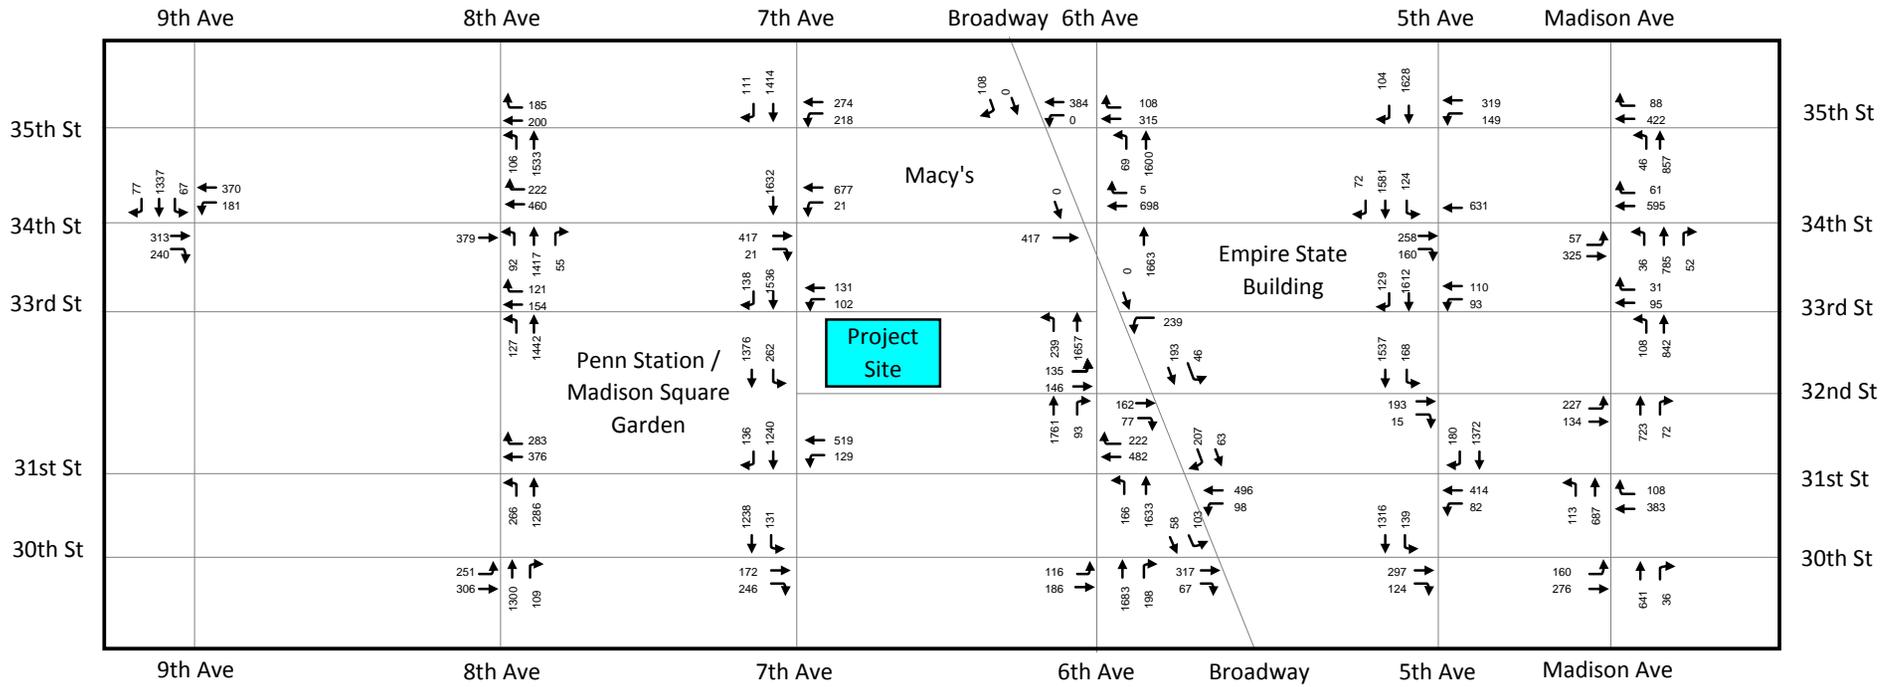



2014 Future with the Proposed Project Traffic Volumes - Inset 1
 Single-Tenant Scenario
 (Saturday MD Peak Hour)

15 PENN PLAZA

Figure 16-35



15 Penn Plaza FEIS

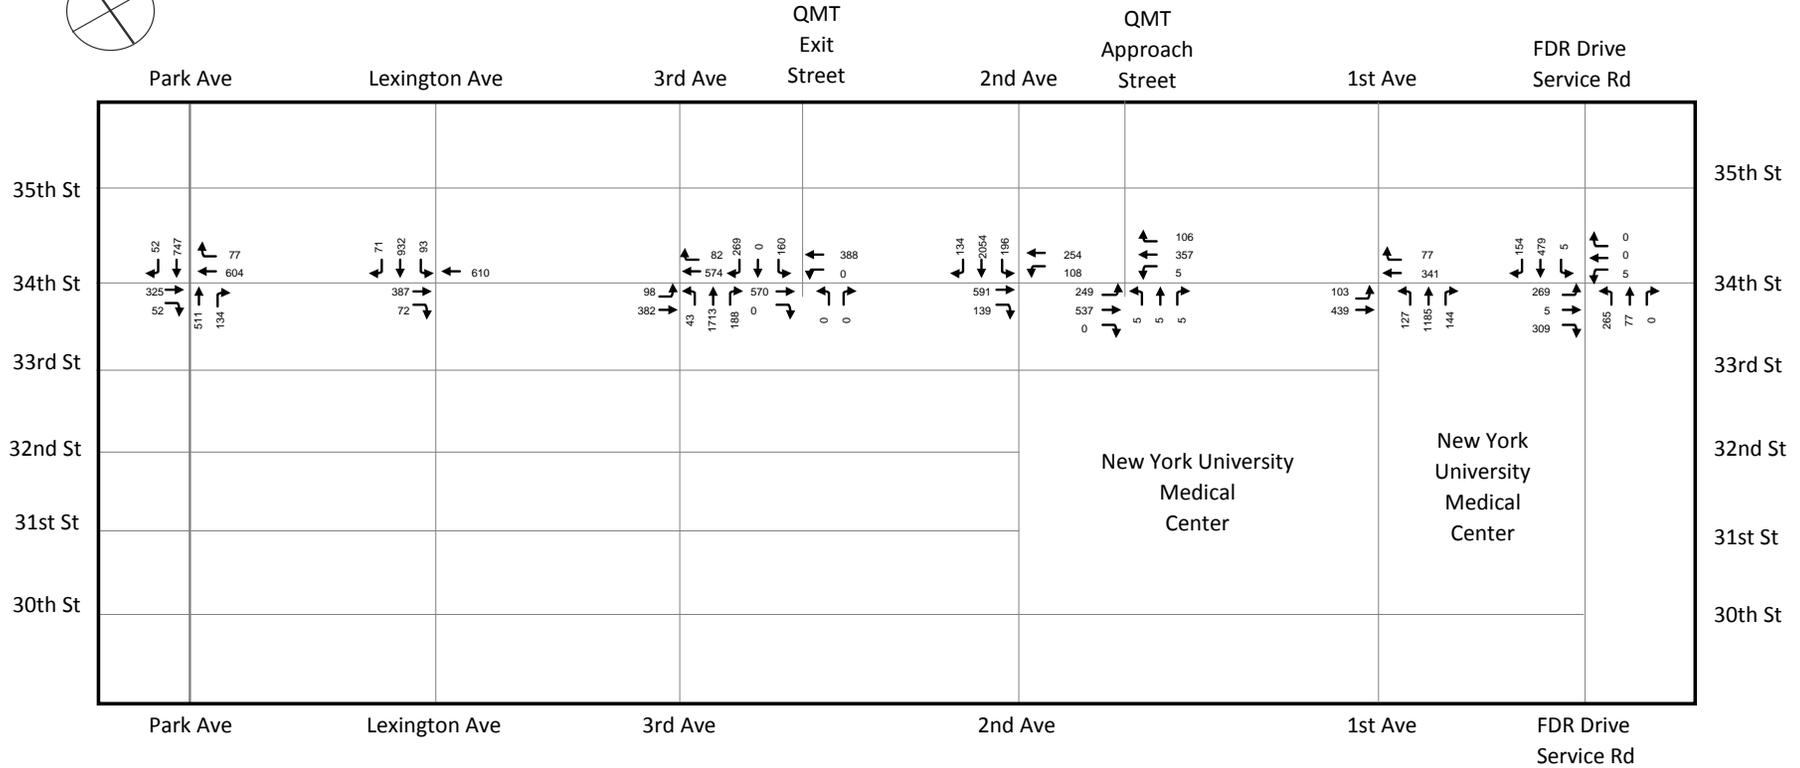

2014 Future with the Proposed Project Traffic Volumes - Inset 2
 Single-Tenant Scenario
 (Saturday MD Peak Hour)

15 PENN PLAZA



Figure 16-36

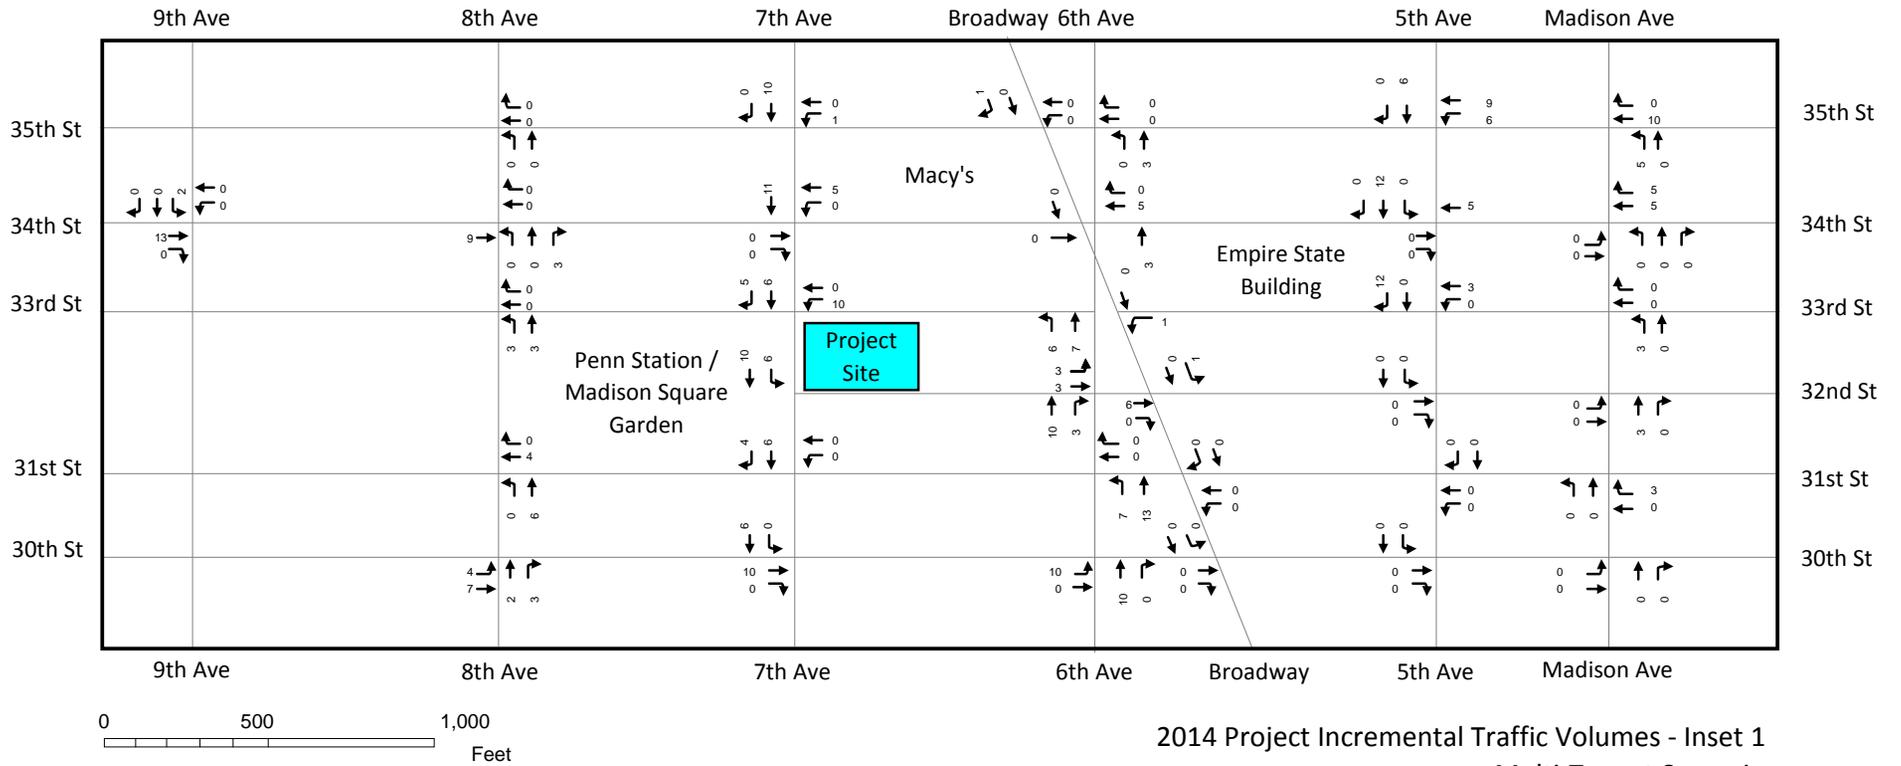

2014 Project Incremental Traffic Volumes - Inset 1
Multi-Tenant Scenario
(Weekday AM Peak Hour)



15 PENN PLAZA

Figure 16-37

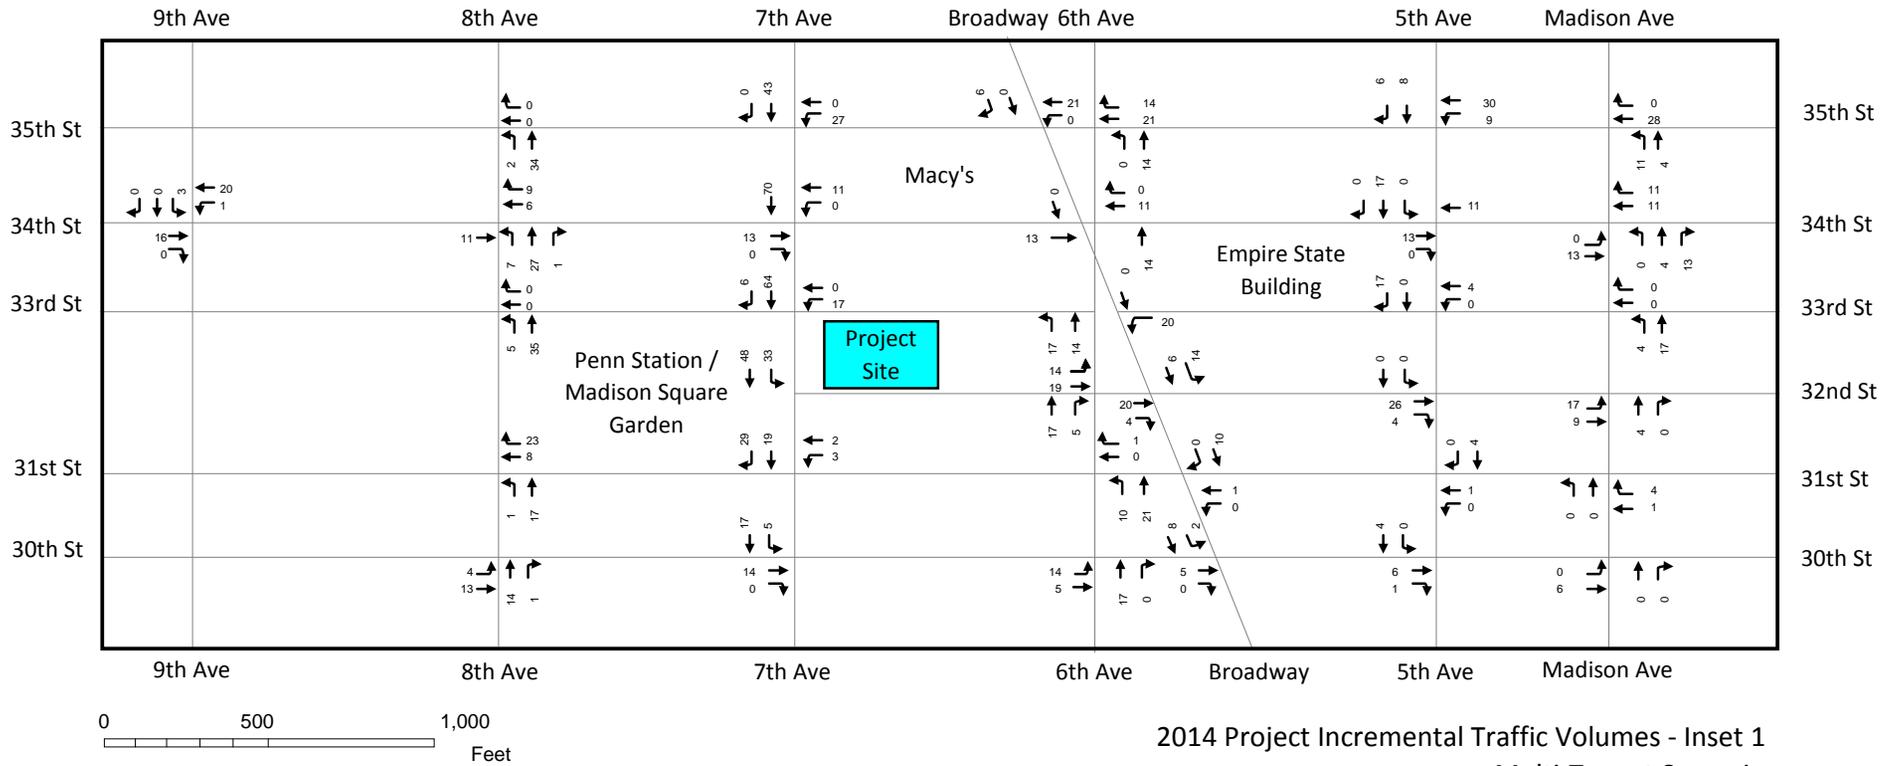

15 PENN PLAZA



Figure 16-39

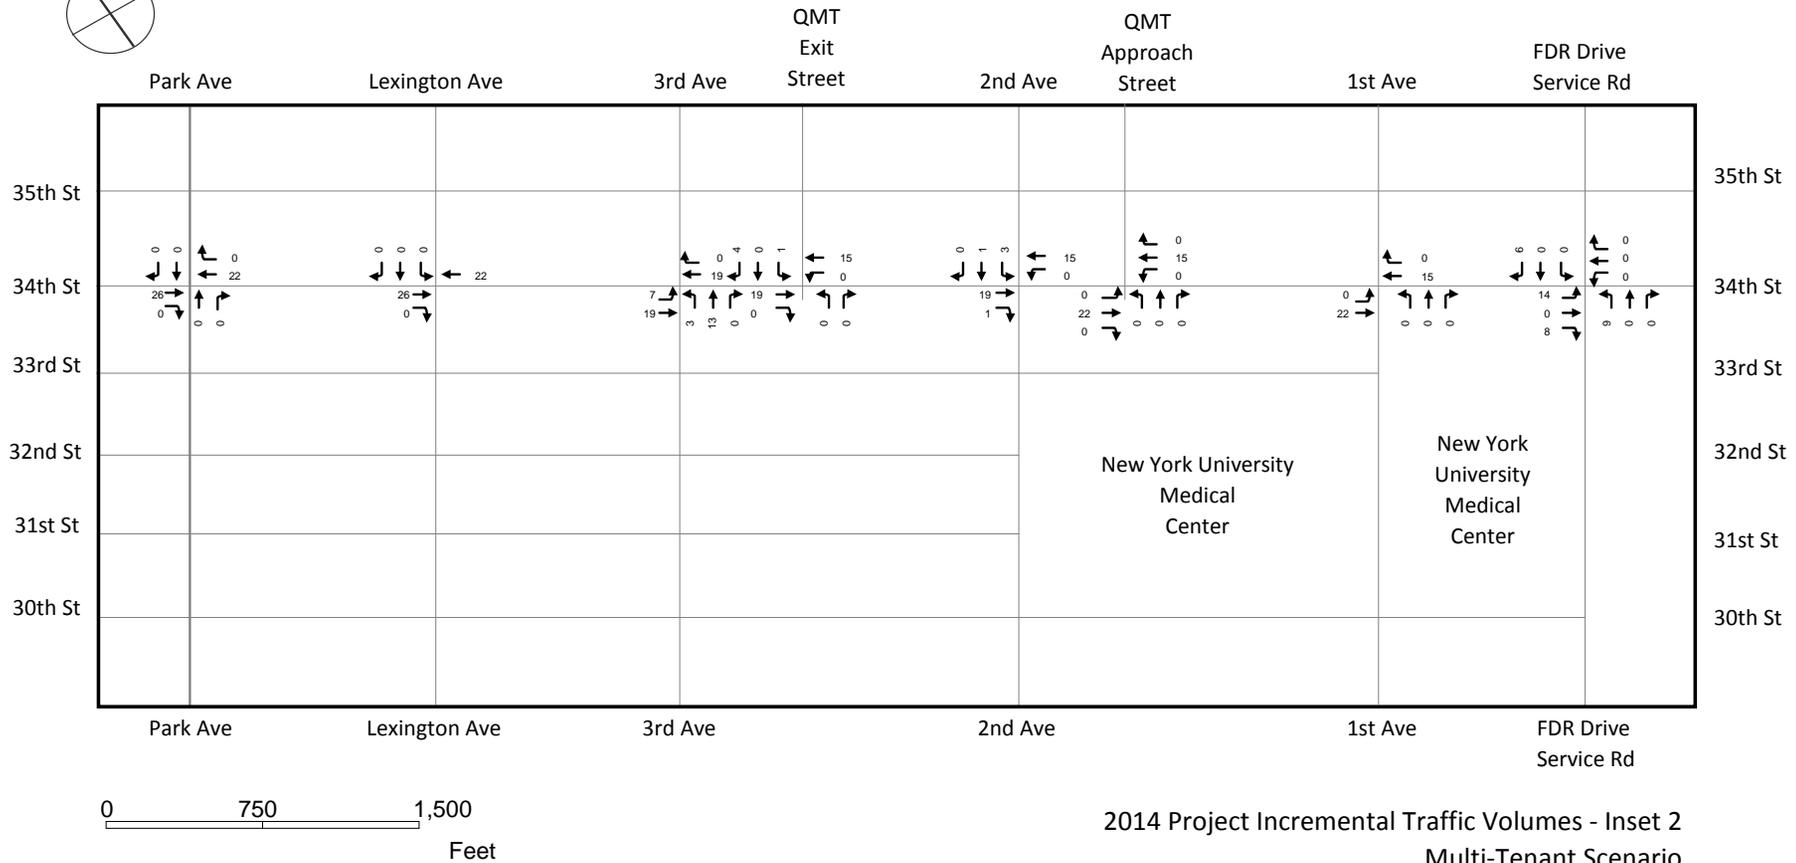

2014 Project Incremental Traffic Volumes - Inset 2
 Multi-Tenant Scenario
 (Weekday MD Peak Hour)

15 PENN PLAZA



Figure 16-40

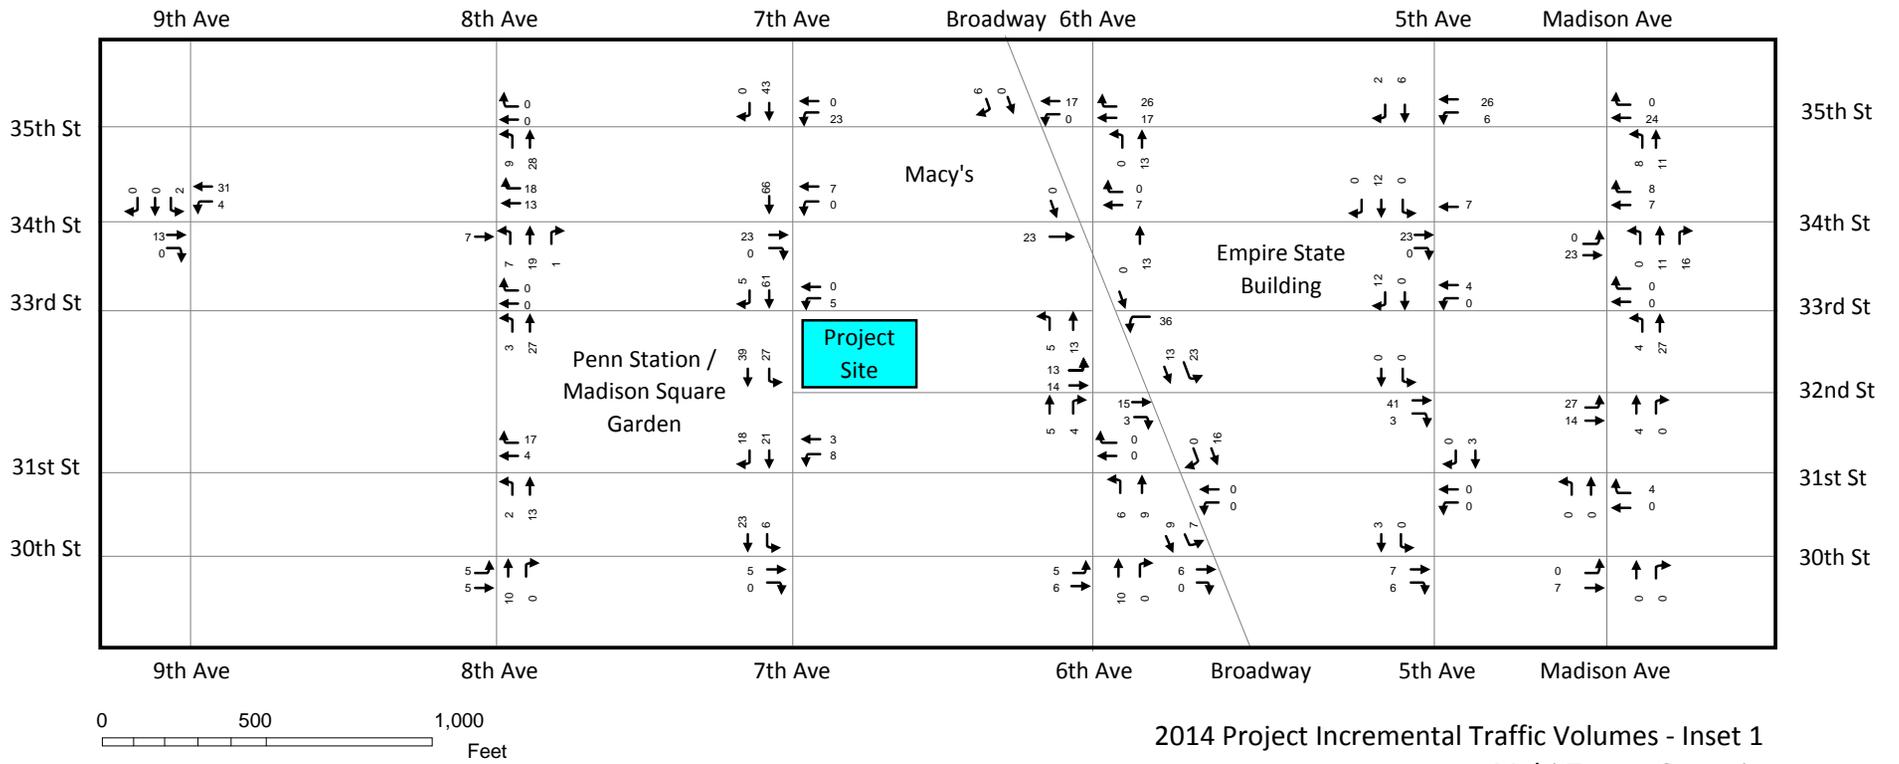

2014 Project Incremental Traffic Volumes - Inset 1
Multi-Tenant Scenario
(Weekday PM Peak Hour)



15 PENN PLAZA

Figure 16-41

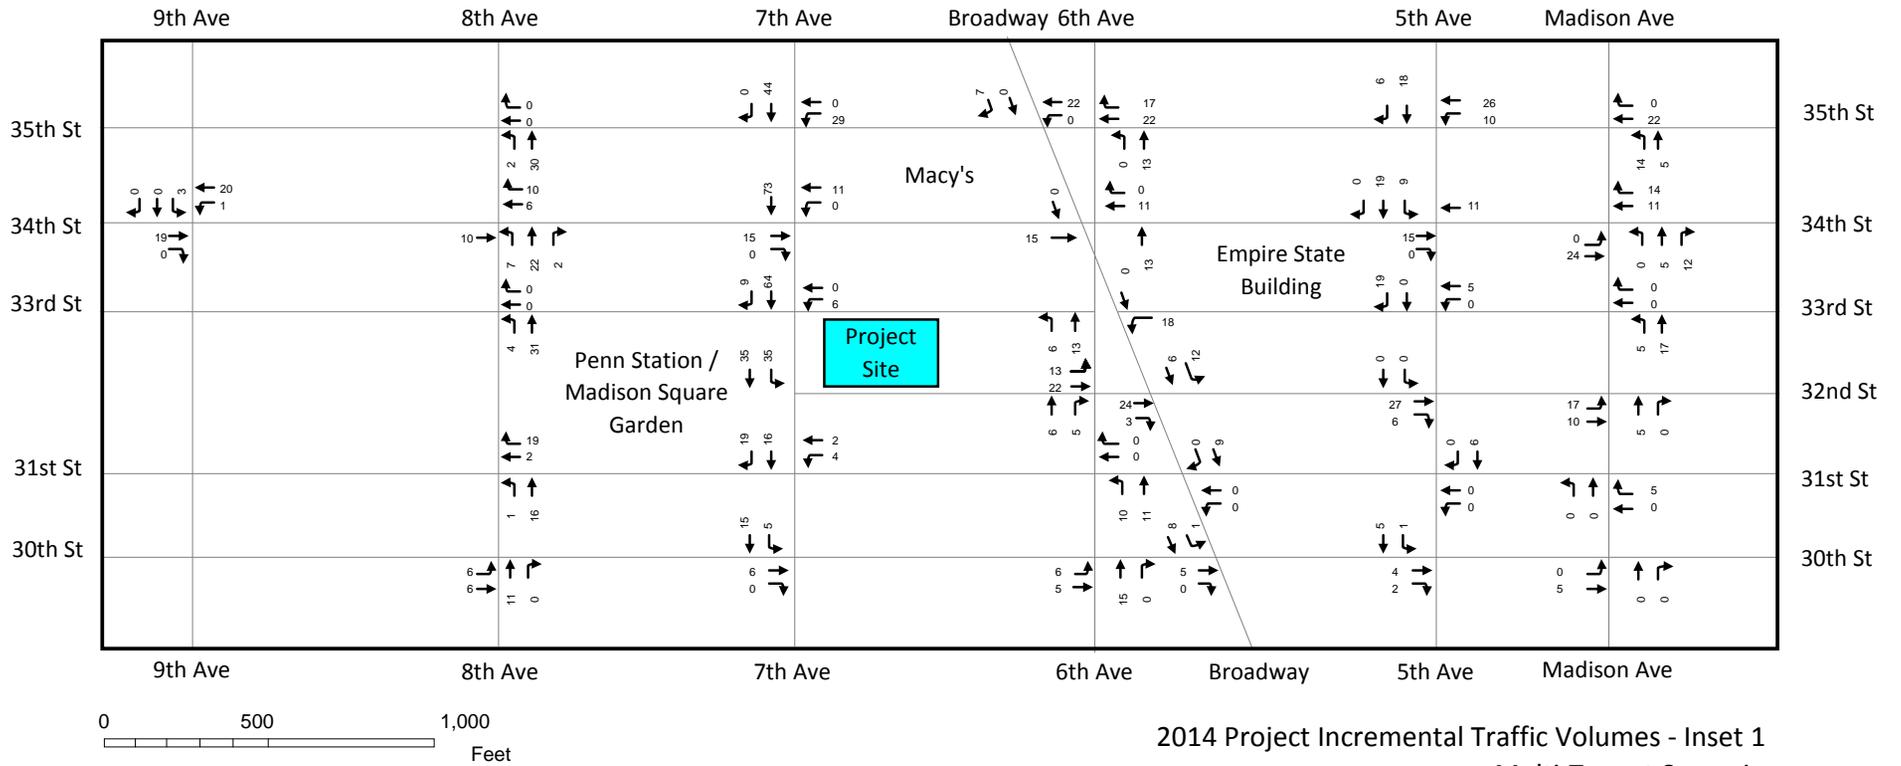



15 PENN PLAZA

Figure 16-43

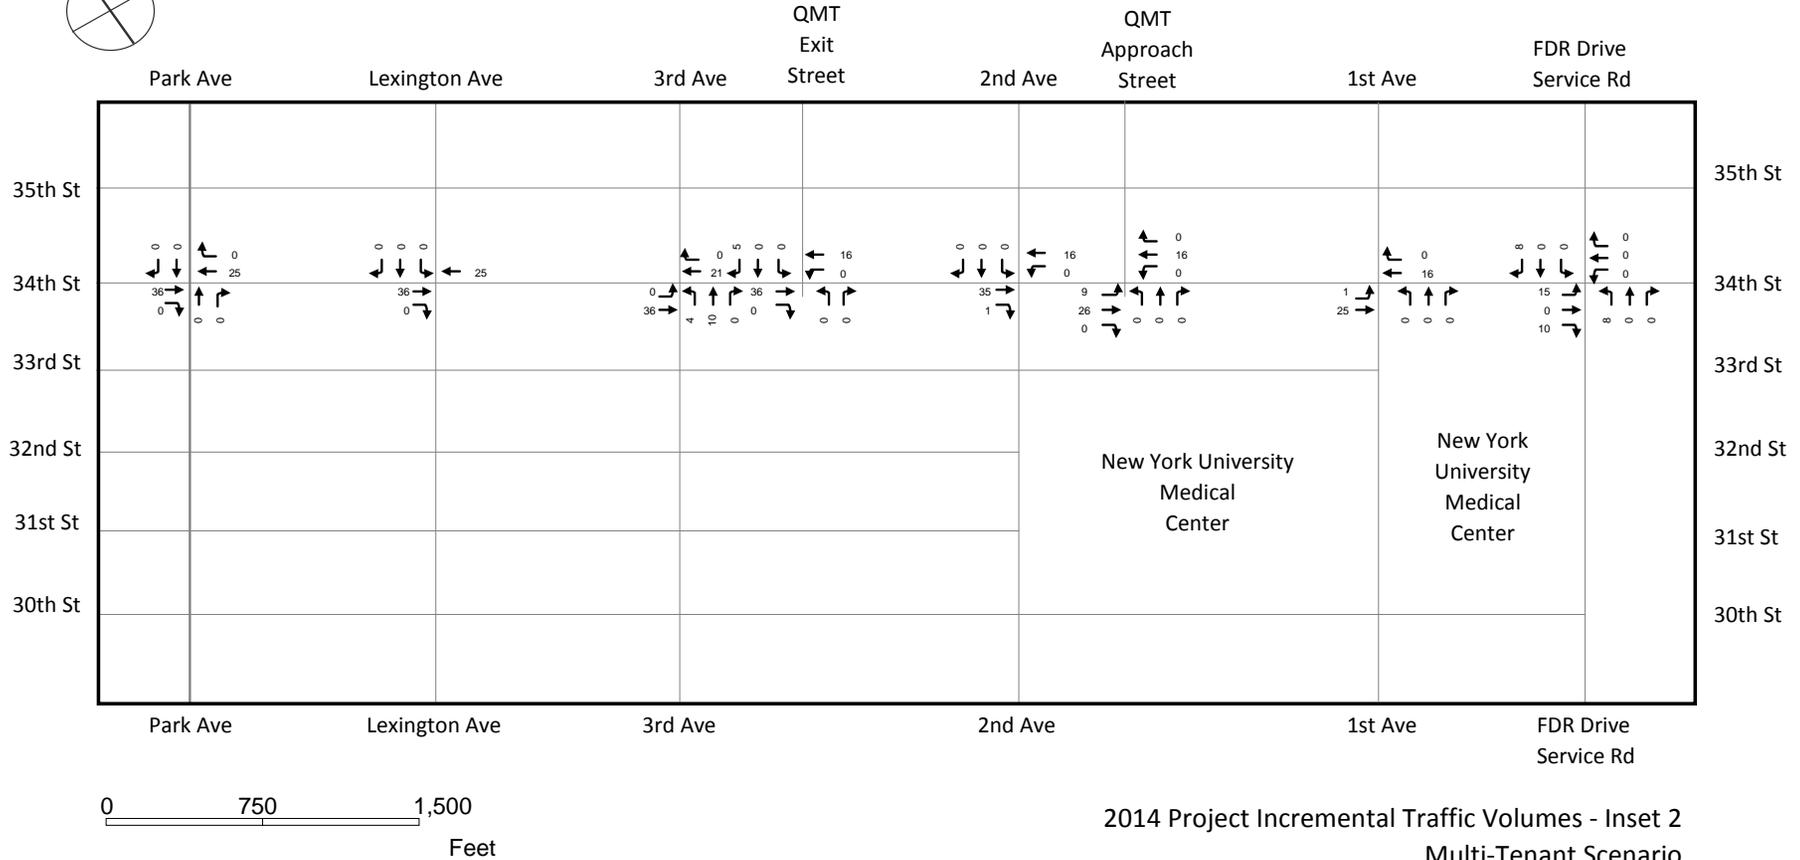



15 PENN PLAZA

Figure 16-44

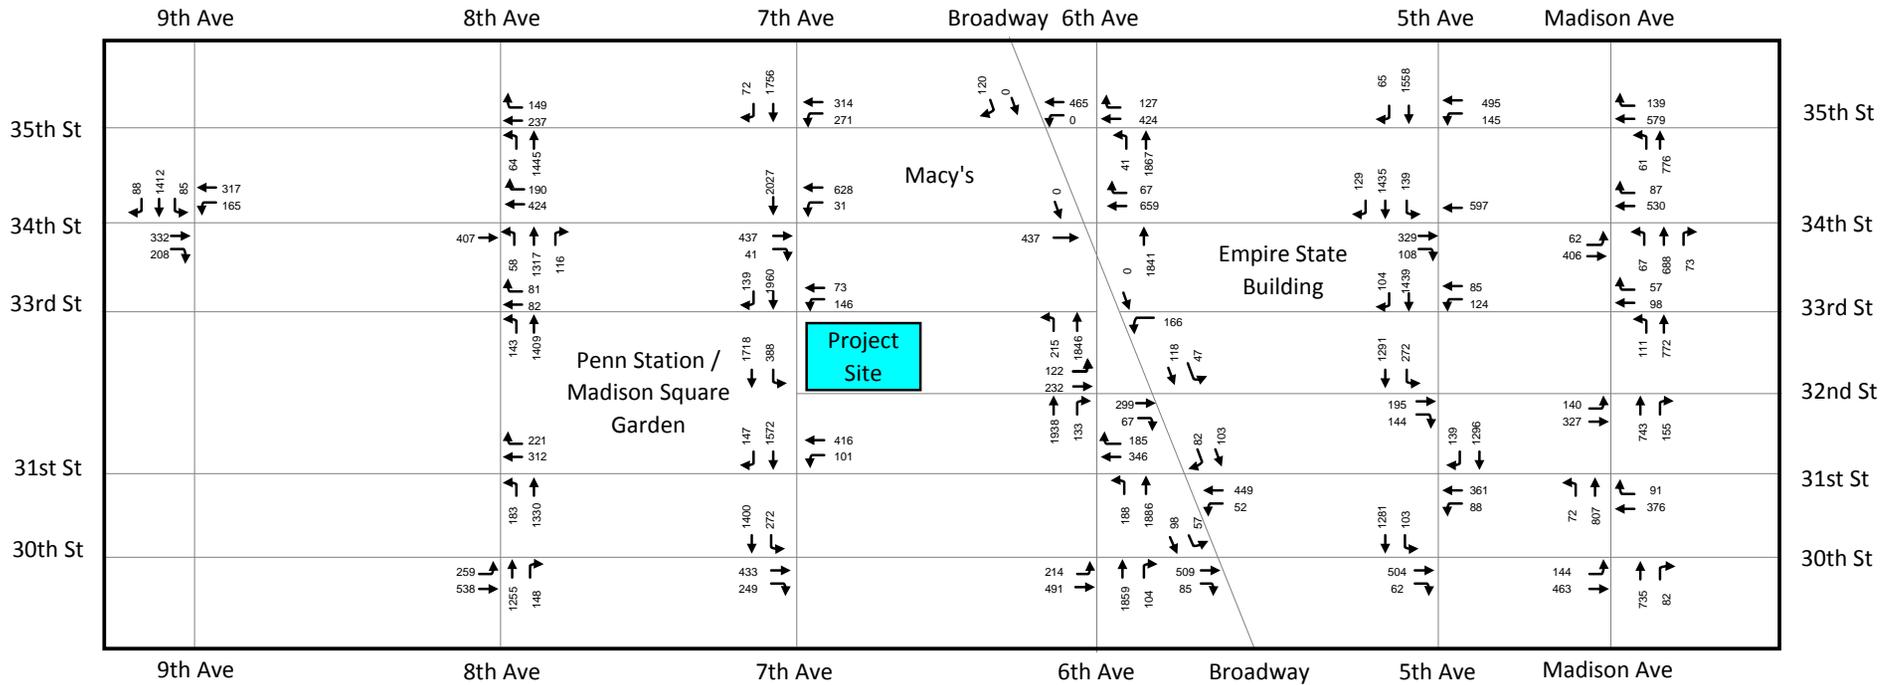

2014 Future with the Proposed Project Traffic Volumes - Inset 1
Multi-Tenant Scenario
(Weekday AM Peak Hour)



15 Penn Plaza FEIS

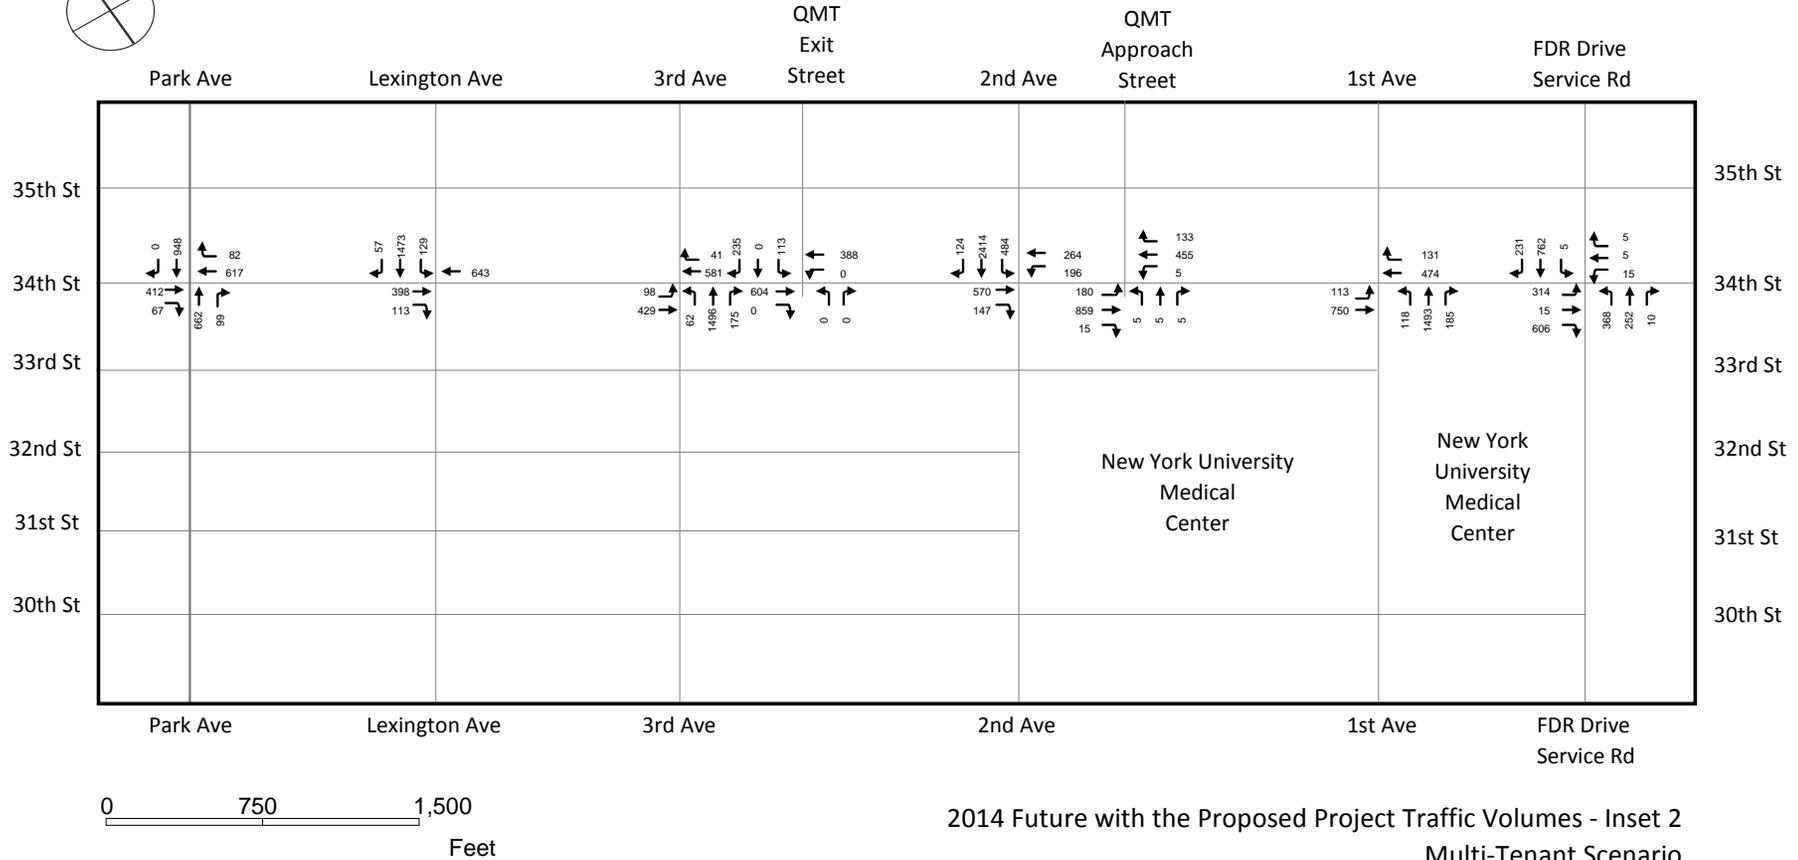

2014 Future with the Proposed Project Traffic Volumes - Inset 2
Multi-Tenant Scenario
(Weekday AM Peak Hour)

15 PENN PLAZA



Figure 16-46

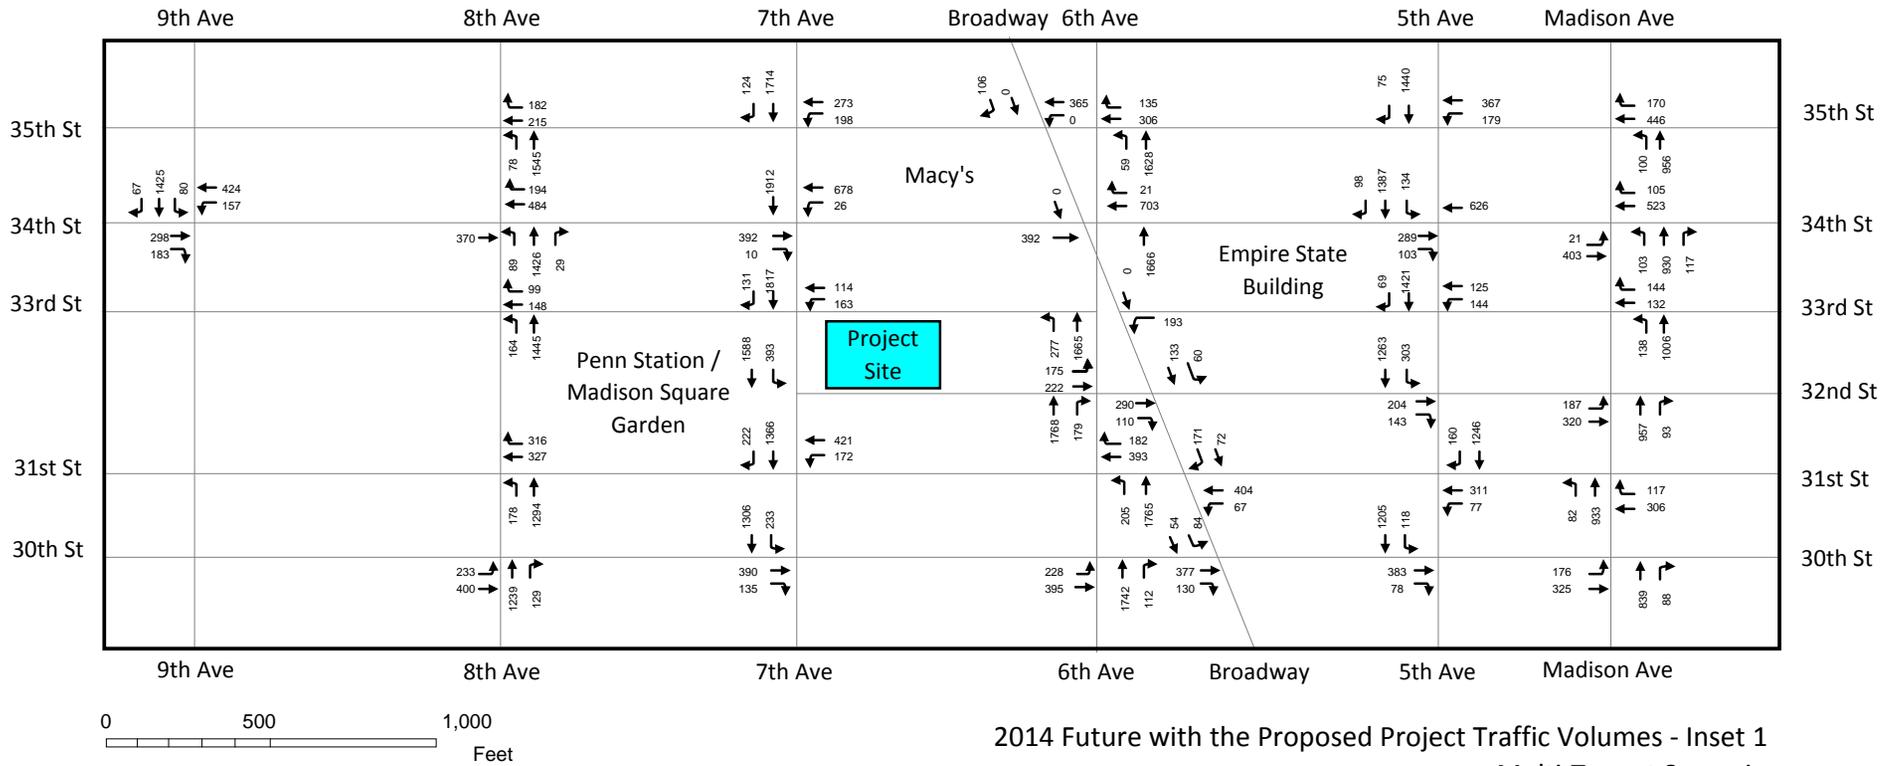

15 PENN PLAZA

Figure 16-47



15 Penn Plaza FEIS

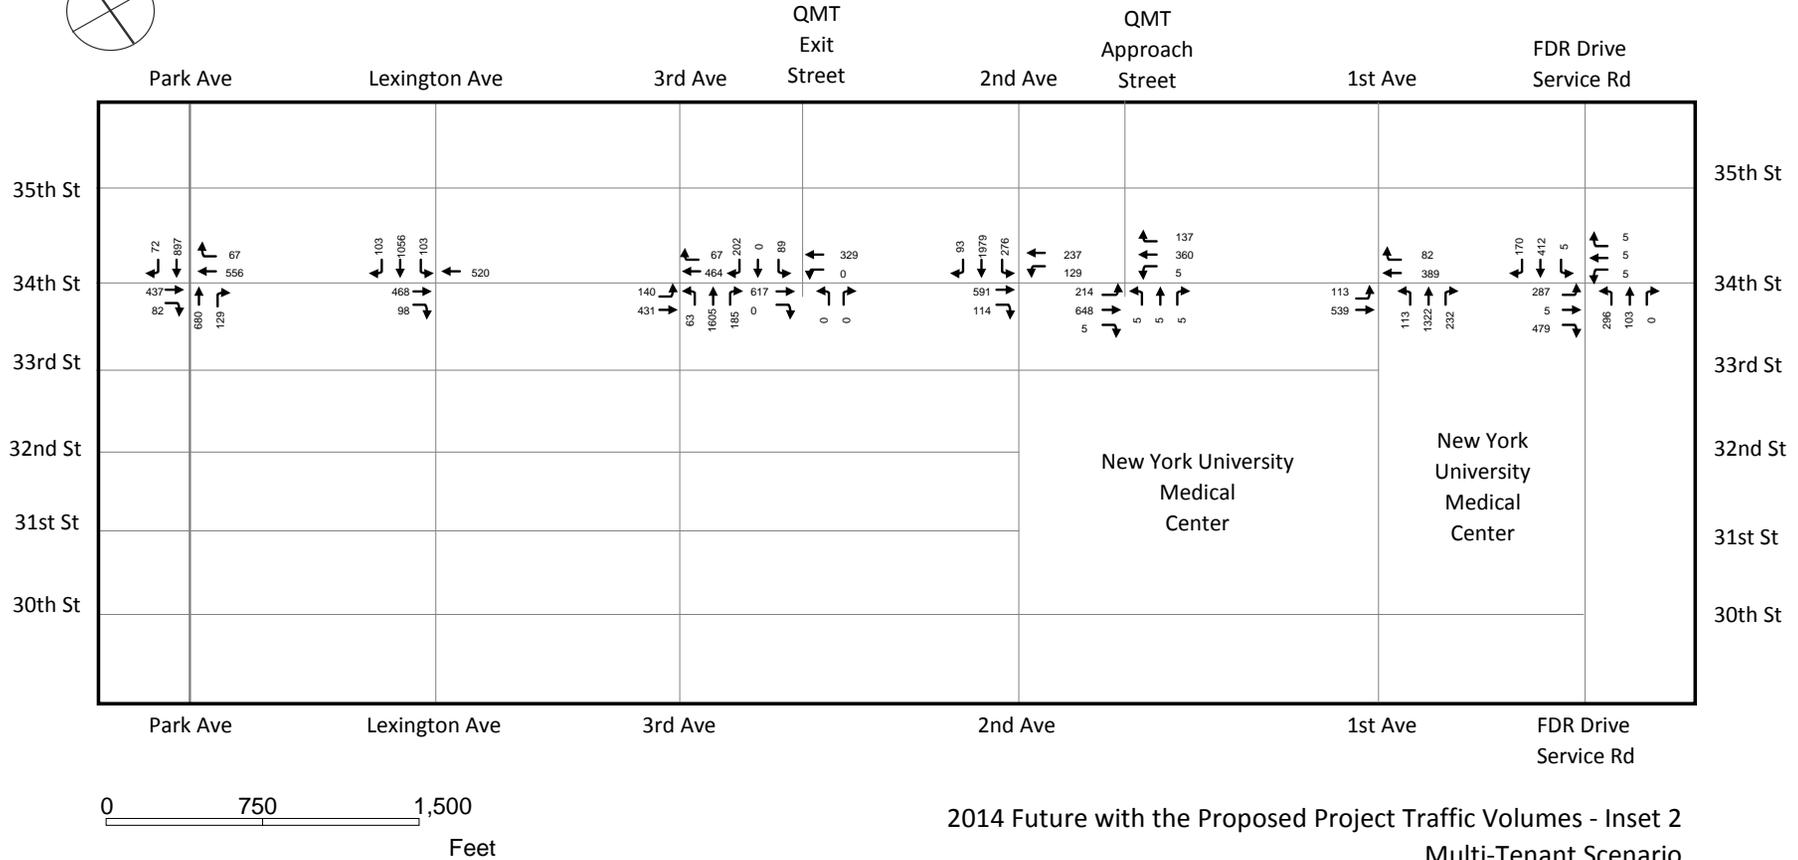

2014 Future with the Proposed Project Traffic Volumes - Inset 2
Multi-Tenant Scenario
(Weekday MD Peak Hour)

15 PENN PLAZA

Figure 16-48

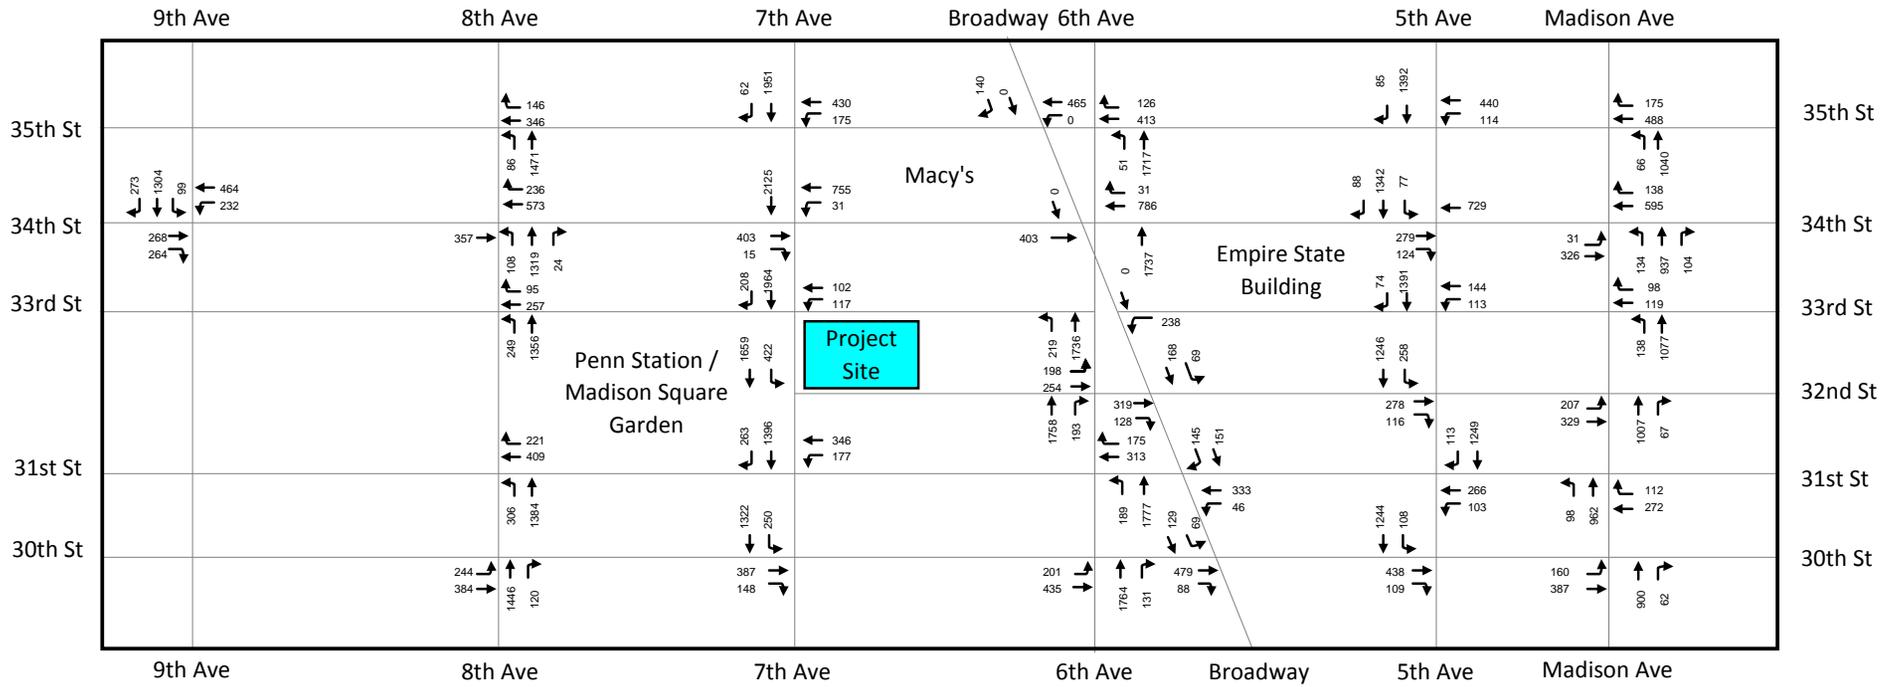



2014 Future with the Proposed Project Traffic Volumes - Inset 1
Multi-Tenant Scenario
(Weekday PM Peak Hour)

15 PENN PLAZA

Figure 16-49



15 Penn Plaza FEIS

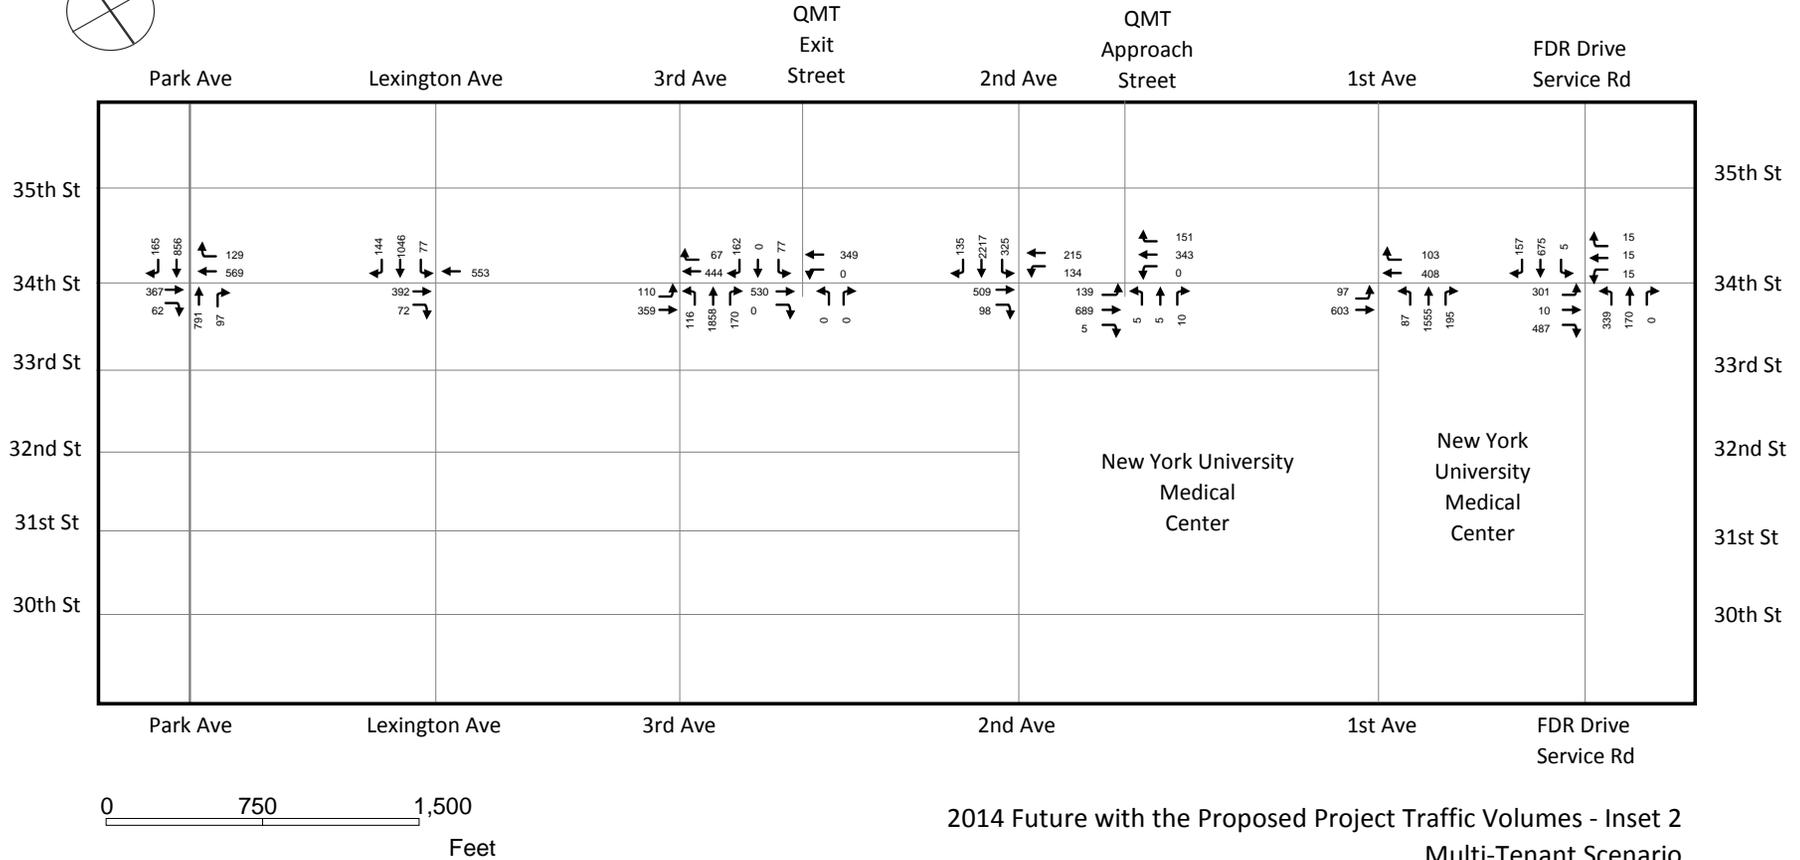

2014 Future with the Proposed Project Traffic Volumes - Inset 2
Multi-Tenant Scenario
(Weekday PM Peak Hour)

15 PENN PLAZA




Figure 16-50

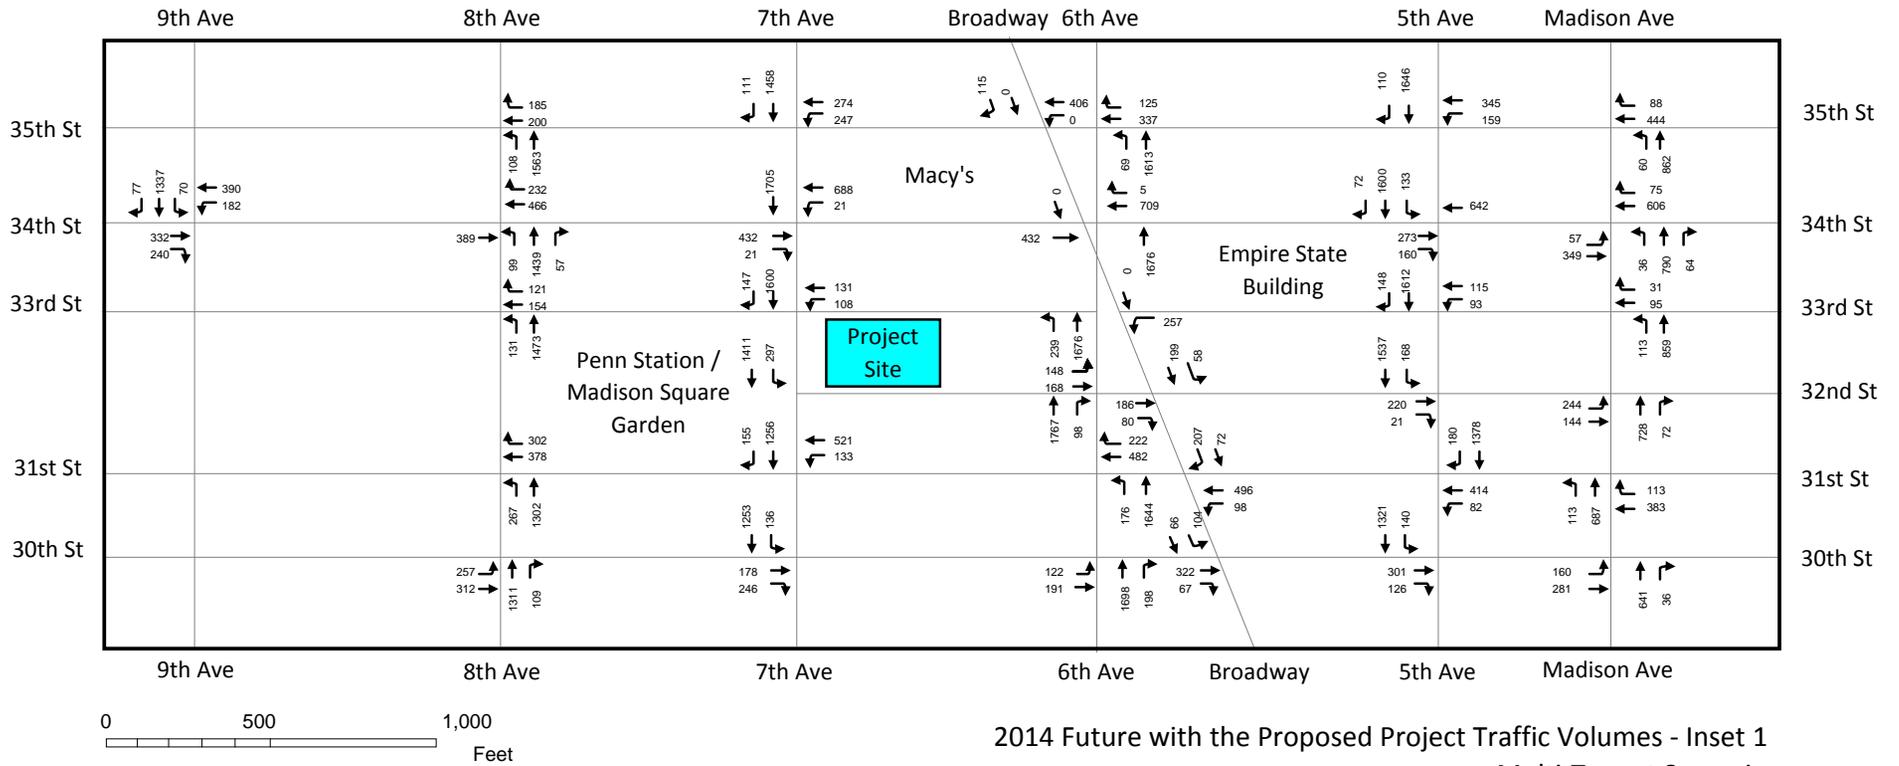

15 PENN PLAZA

Figure 16-51

15 Penn Plaza FEIS

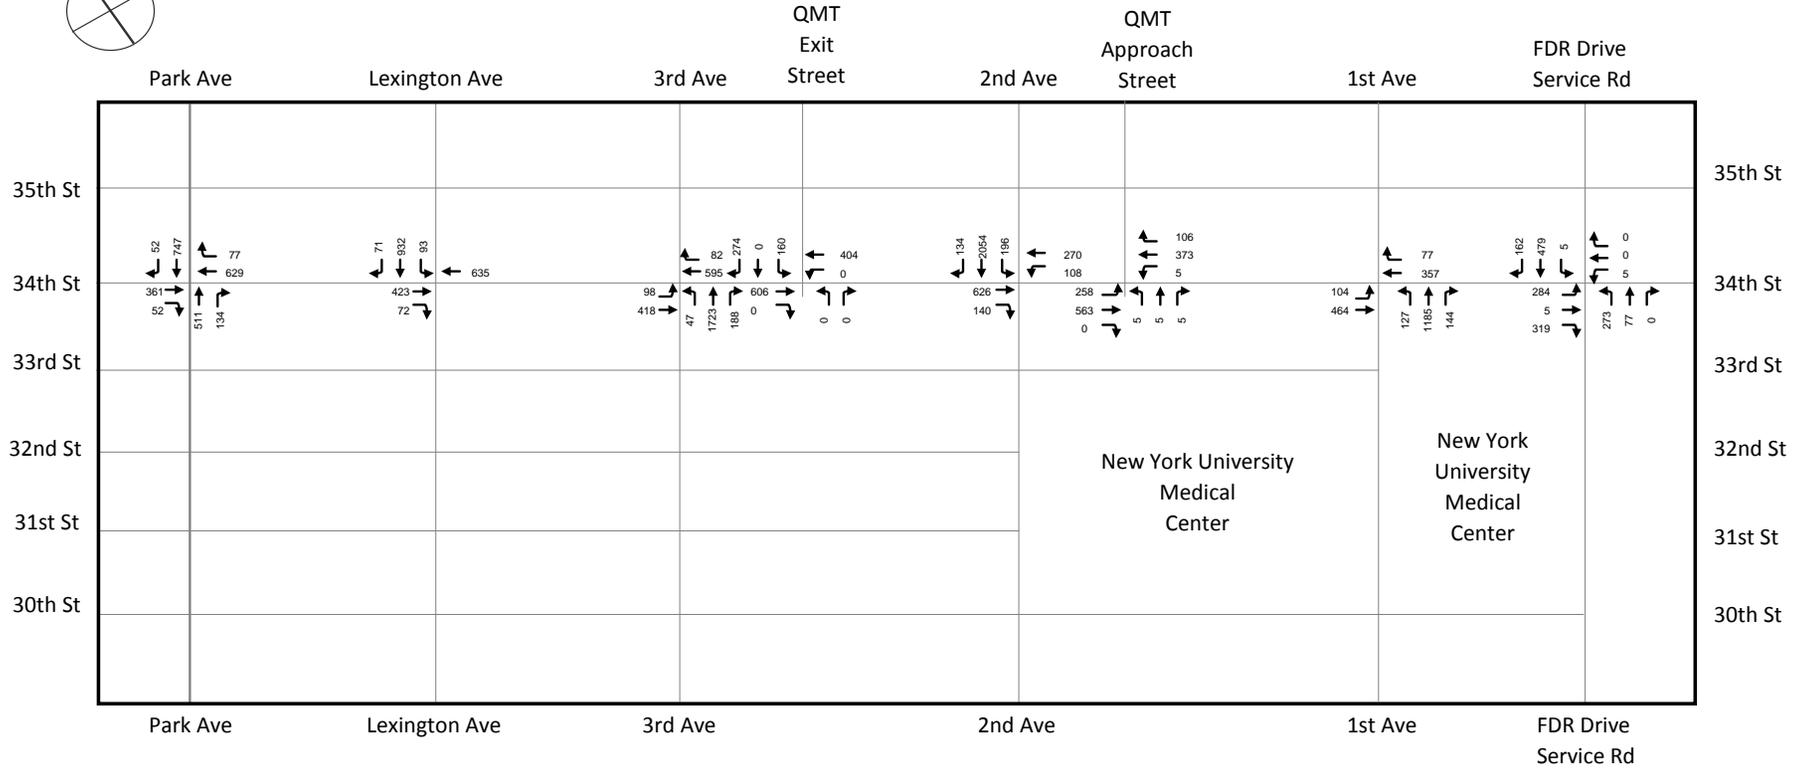

2014 Future with the Proposed Project Traffic Volumes - Inset 2
Multi-Tenant Scenario
(Saturday MD Peak Hour)

15 PENN PLAZA

Figure 16-52

LEVEL OF SERVICE ANALYSIS

An intersection capacity and level of service analysis was conducted for the 43 study area intersections. The following summarizes the analysis results by travel corridor and details the locations with substandard operating levels (marginally unacceptable mid-LOS D or more than 45 seconds of average delay) by analysis time period.

SUMMARY OF ANALYSIS RESULTS

Although most intersections in the traffic study area operate at overall acceptable levels during the four analysis peak hours, individual approach movements at numerous intersections operate at mid-LOS D or worse. For the Single-Tenant Office Scenario, of the 145 approach movements analyzed, 45 approach movements operate at mid-LOS D or worse in the AM peak hour; 24 approach movements operate at mid-LOS D or worse in the midday peak hour, 35 approach movements operate at mid-LOS D or worse in the PM peak hour; and 29 approach movements operate at mid-LOS D or worse in the Saturday midday peak hour. These findings are presented in Table 16-16.

Table 16-16
2014 Future with the Proposed Project – Single-Tenant Office Scenario
Number of Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Level of Service	Analysis Hour			
	AM	Weekday Midday	PM	Saturday Midday
Mid-LOS D	<u>9</u>	<u>2</u>	<u>7</u>	<u>5</u>
LOS E	11	9	6	12
LOS F	<u>25</u>	<u>13</u>	<u>22</u>	<u>12</u>

For the Multi-Tenant Office Scenario, of the 145 approach movements analyzed, 43 approach movements operate at mid-LOS D or worse in the AM peak hour; 25 approach movements operate at mid-LOS D or worse in the midday peak hour, 36 approach movements operate at mid-LOS D or worse in the PM peak hour; and 33 approach movements operate at mid-LOS D or worse in the Saturday midday peak hour. These findings are presented in Table 16-17.

Table 16-17
2014 Future with the Proposed Project – Multi-Tenant Office Scenario
Number of Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Level of Service	Analysis Hour			
	AM	Weekday Midday	PM	Saturday Midday
Mid-LOS D	<u>8</u>	<u>3</u>	<u>7</u>	<u>7</u>
LOS E	<u>11</u>	<u>7</u>	<u>7</u>	<u>12</u>
LOS F	24	<u>15</u>	<u>22</u>	14

SIGNIFICANT ADVERSE TRAFFIC IMPACTS

Based on the thresholds established for signalized intersections in the *CEQR Technical Manual*, a significant adverse traffic impact would occur if a No Action LOS A, B or C deteriorates to unacceptable mid-LOS D, or a LOS E or F, in the future with the proposed project condition.

The *CEQR Technical Manual* further states that, for a No Action condition mid-LOS D, an increase of five or more seconds of delay in a lane group in the future with the proposed project condition should be considered significant. For No Action LOS E, an increase in delay of four seconds should be considered significant. For No Action LOS F, a three second increase in delay should be considered significant. However, if a No Action LOS F condition already has delays in excess of 120 seconds, an increase of one second in delay should be considered significant, unless the proposed action would generate fewer than five vehicles through that lane group in the peak hour.

Table 16-18 and 16-19 summarize the number of intersections and approach movements with significant adverse impacts for the 2014 future with the proposed project Single-Tenant Office Scenario condition. Of the 145 approach movements analyzed, 17 approach movements with significant adverse impacts at 15 intersections were identified during the AM peak hour and 10 approach movements with significant adverse impacts at 9 intersections were identified during the PM peak hour.

Table 16-18
2014 Future with the Proposed Project—Single-Tenant Office Scenario
Number of Significantly Impacted Intersections

Analysis Year	Analysis Hour			
	AM	Weekday Midday	PM	Saturday Midday
2014	15	0	9	0

Table 16-19
2014 Future with the Proposed Project—Single-Tenant Office Scenario
Number of Significantly Impacted Approach Movements

Analysis Year	Analysis Hour			
	AM	Weekday Midday	PM	Saturday Midday
2014	17	0	10	0

Tables 16-20 and 16-21 summarize the number of intersection approach movements with significant adverse impacts for the 2014 future with the proposed project Multi-Tenant Office Scenario condition. Of the 145 approach movements analyzed, 9 approach movements with significant adverse impacts at 8 intersections were identified during the AM peak hour; 15 approach movements with significant adverse impacts at 14 intersections were identified during the weekday midday peak hour; 22 approach movements with significant adverse impacts at 18 intersections were identified during the PM peak hour; and 18 approach movements with significant adverse impacts at 18 intersections were identified during the Saturday midday peak hour.

Table 16-20
2014 Future with the Proposed Project—Multi-Tenant Office Scenario
Number of Significantly Impacted Intersections

Analysis Year	Analysis Hour			
	AM	Weekday Midday	PM	Saturday Midday
2014	8	14	18	18


Table 16-21
2014 Future with the Proposed Project—Multi-Tenant Office Scenario
Number of Significantly Impacted Approach Movements

Analysis Year	Analysis Hour			
	AM	Weekday Midday	PM	Saturday Midday
2014	<u>9</u>	<u>15</u>	<u>22</u>	<u>18</u>

Appropriate measures to mitigate these significant impacts are identified along with the evaluation of their effectiveness in Chapter 22, “Mitigation.”

Intersections where significant traffic impacts are projected to occur are presented in **Figures 16-53 through 16-60** for the 2014 future with the proposed project Single-Tenant Office Scenario and Multi-Tenant Office Scenario weekday AM, midday, PM, and Saturday midday conditions, respectively.


Shaded intersection approaches/movements in **Tables 16-22 through 16-29** indicate where significant impacts are projected to occur under CEQR criteria. Also indicated is the incremental average delay in seconds per vehicle for each intersection approach/movement relative to the 2014 No Action condition.

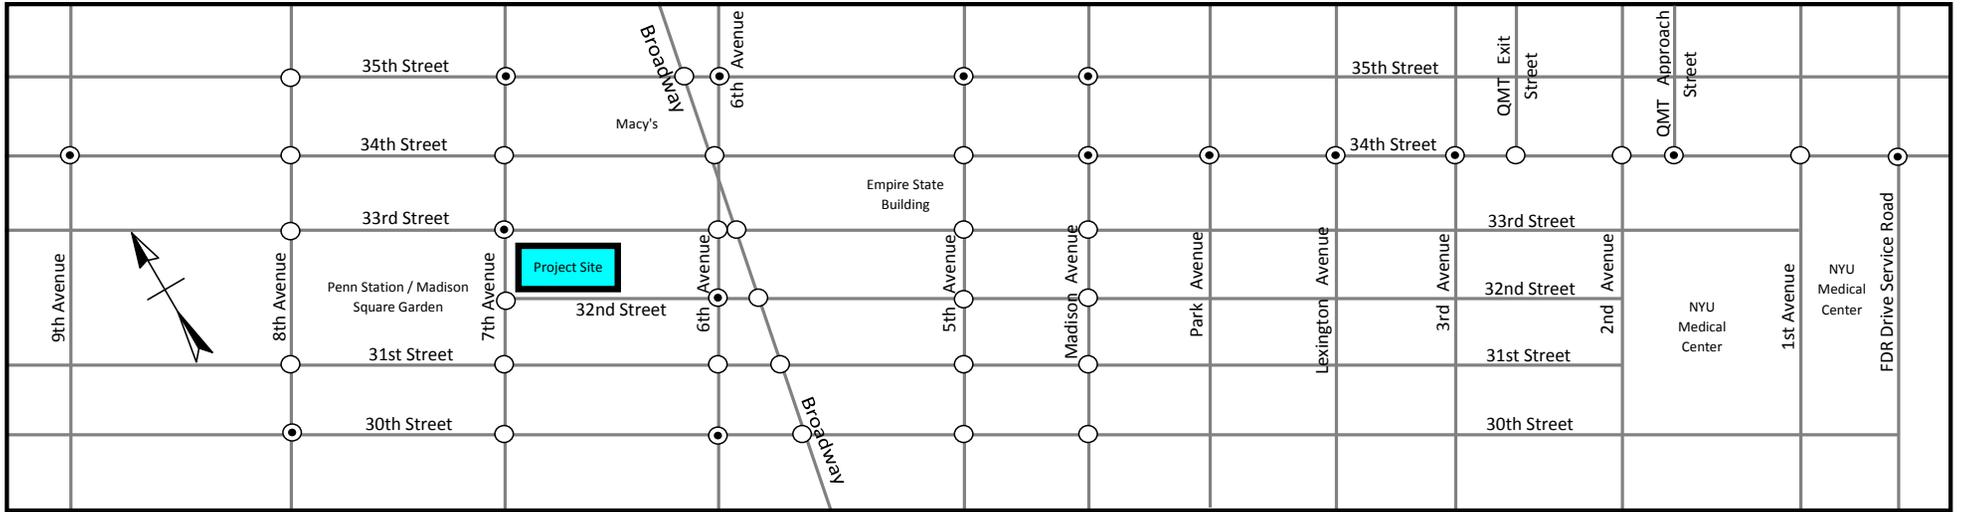

- Project Site
- No Significant Impact
- Significant Impact

15 PENN PLAZA


2014 Future with the Proposed Project—Single-Tenant Office Scenario:
 Intersections with Significant Adverse Impacts
 Weekday AM Peak Hour
 Figure 16-53

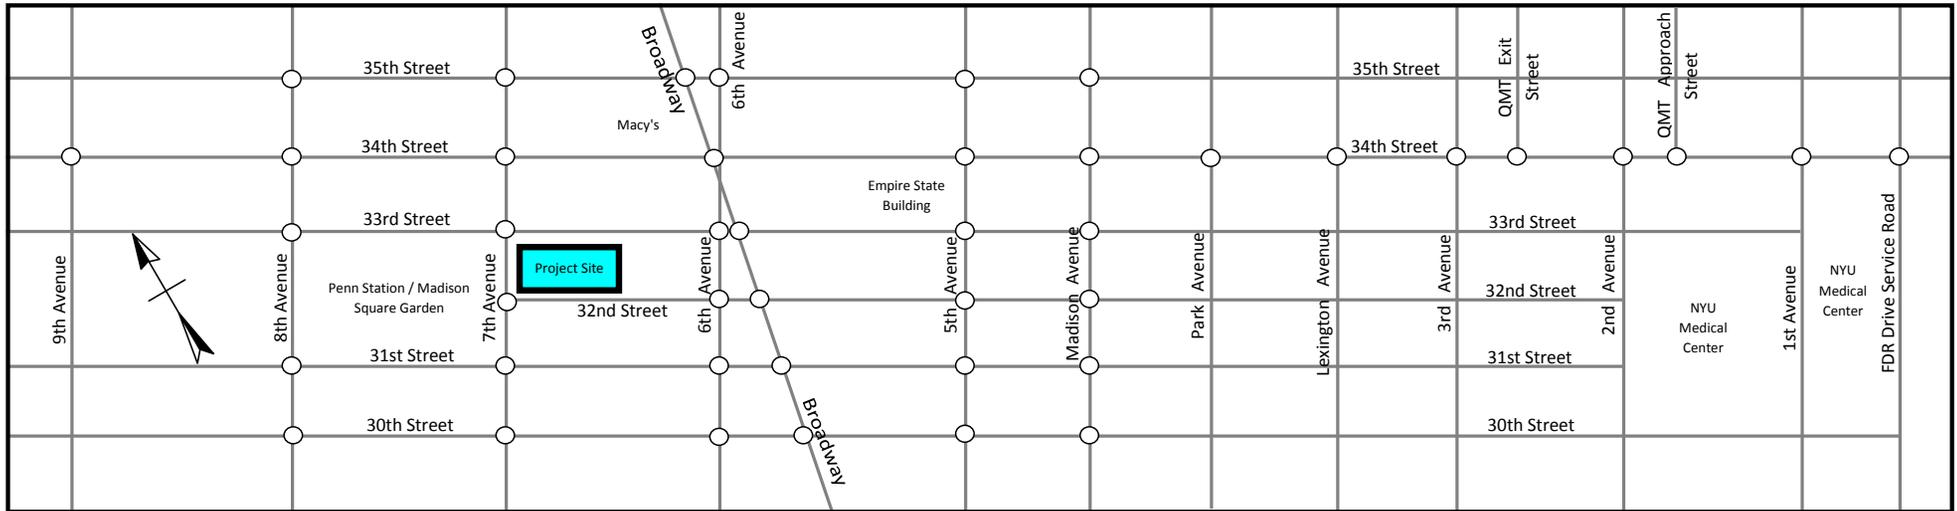

- Project Site
- No Significant Impact
- Significant Impact

15 PENN PLAZA


2014 Future with the Proposed Project—Single-Tenant Office Scenario
 Intersections with Significant Adverse Impacts
 Weekday Midday Peak Hour
 Figure 16-54

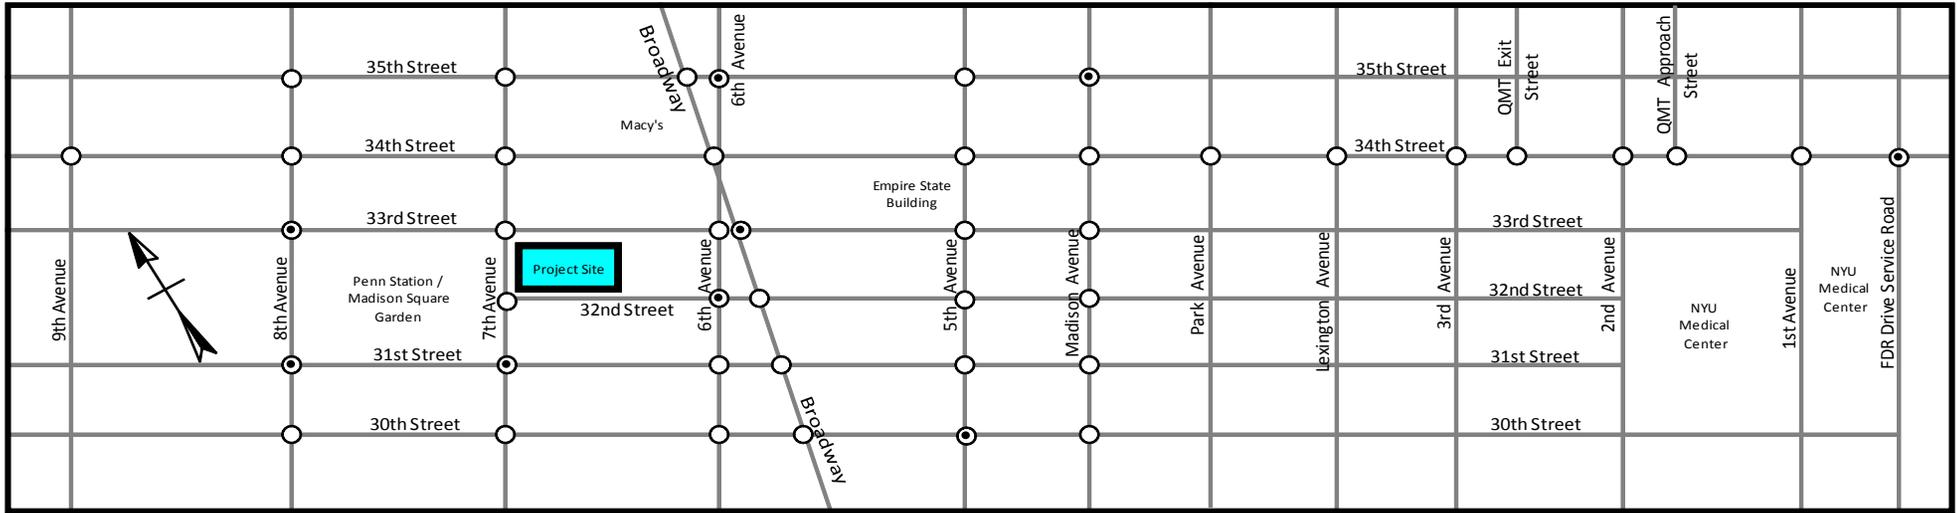

- Project Site
- No Significant Impact
- Significant Impact

15 PENN PLAZA

2014 Future with the Proposed Project—Single-Tenant Office Scenario
 Intersections with Significant Adverse Impacts
 Weekday PM Peak Hour
 Figure 16-55

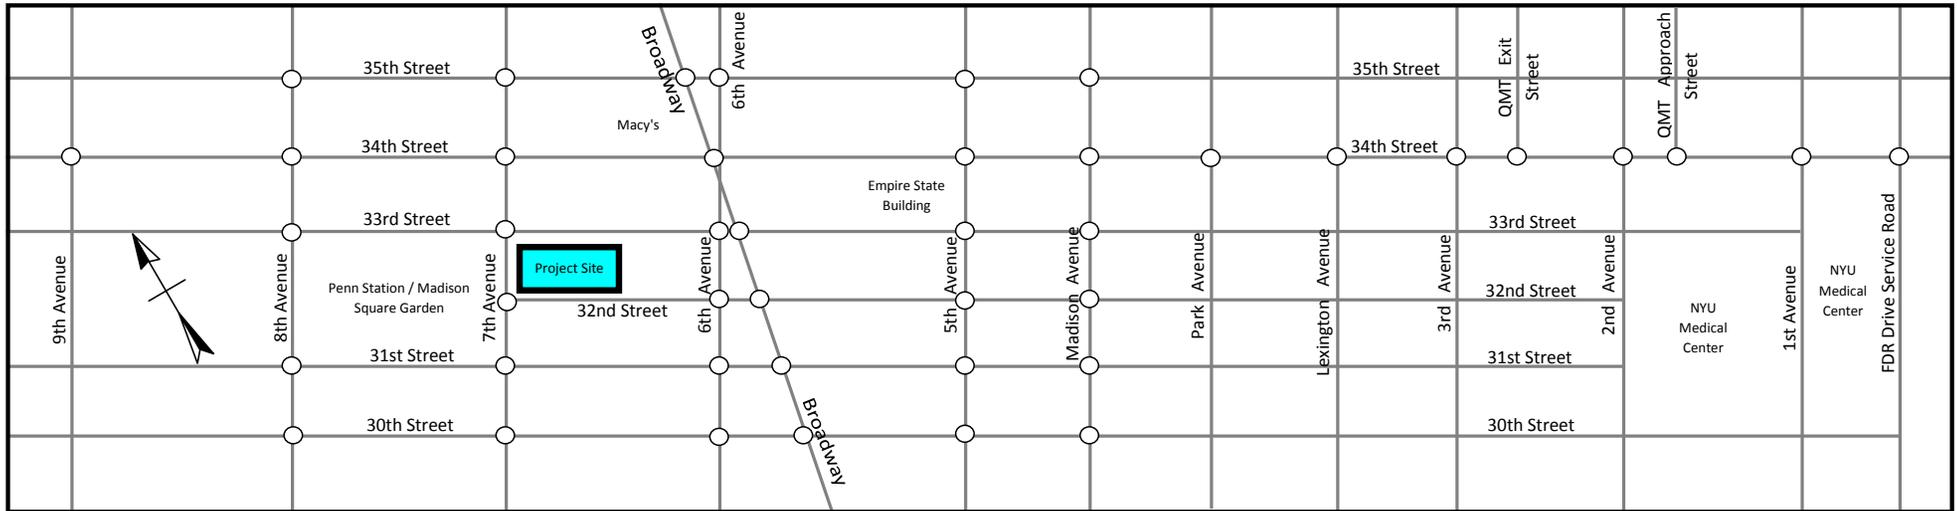


- Project Site
- No Significant Impact
- Significant Impact

15 PENN PLAZA

2014 Future with the Proposed Project—Single-Tenant Office Scenario
 Intersections with Significant Adverse Impacts
 Saturday Midday Peak Hour
 Figure 16-56


15 Penn Plaza FEIS

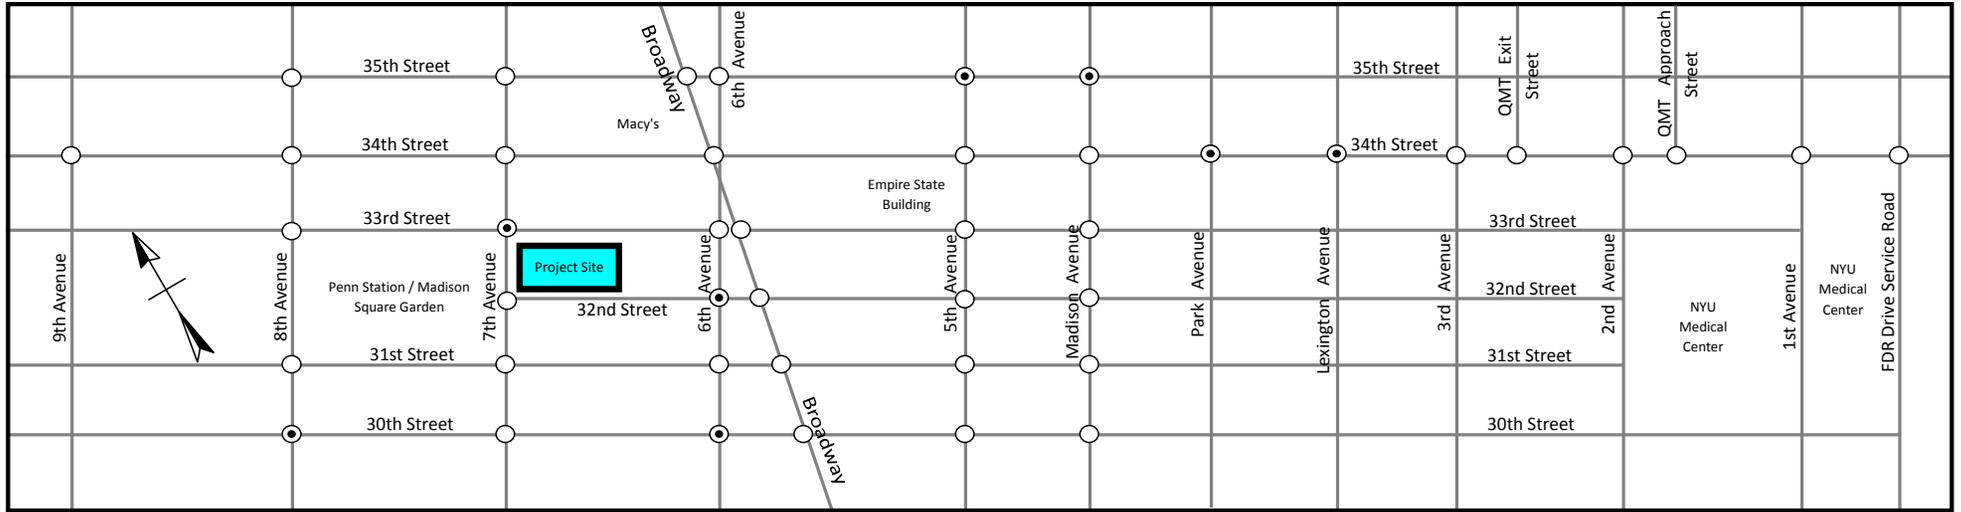

- Project Site
- No Significant Impact
- ⊙ Significant Impact

15 PENN PLAZA


**2014 Future with the Proposed Project—Multi-Tenant Office Scenario
 Intersections with Significant Adverse Impacts
 Weekday AM Peak Hour
 Figure 16-57**

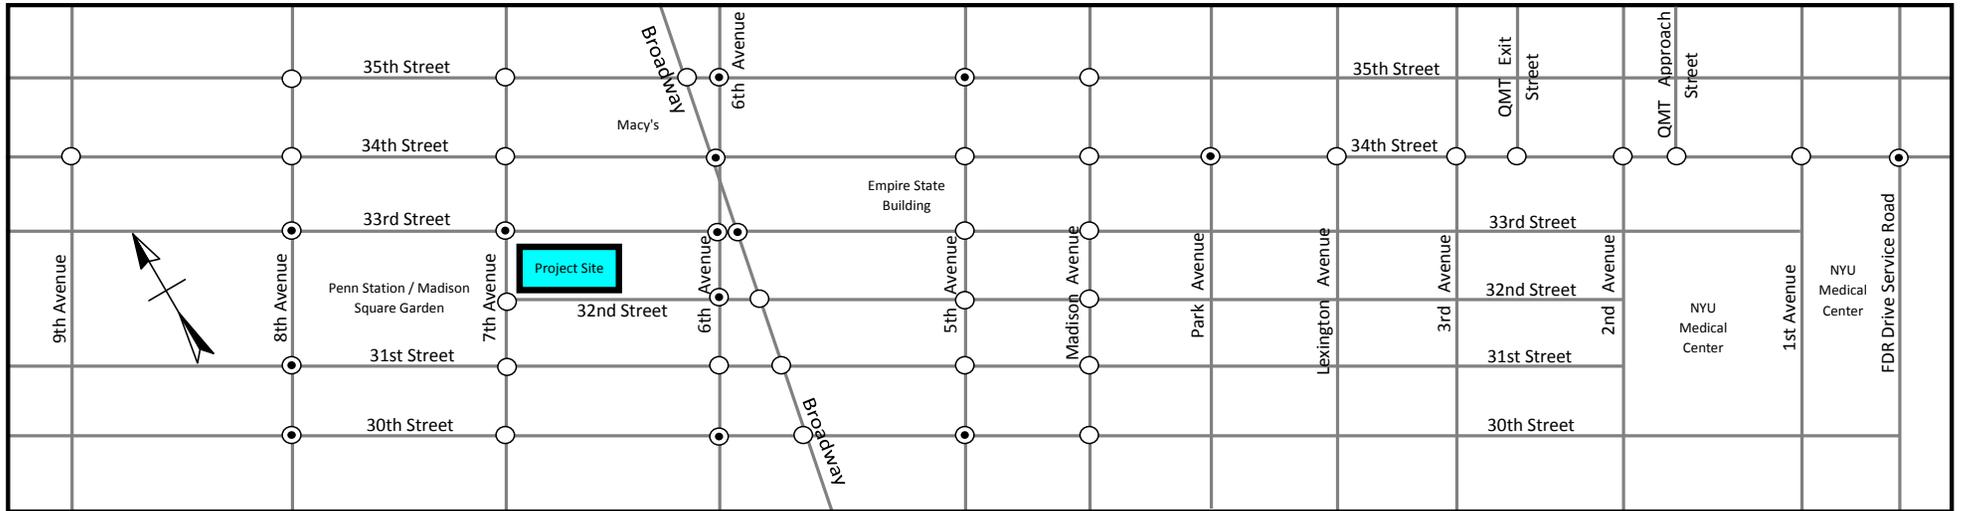

- Project Site
- No Significant Impact
- Significant Impact

15 PENN PLAZA


2014 Future with the Proposed Project—Multi-Tenant Office Scenario
 Intersections with Significant Adverse Impacts
 Weekday Midday Peak Hour
 Figure 16-58

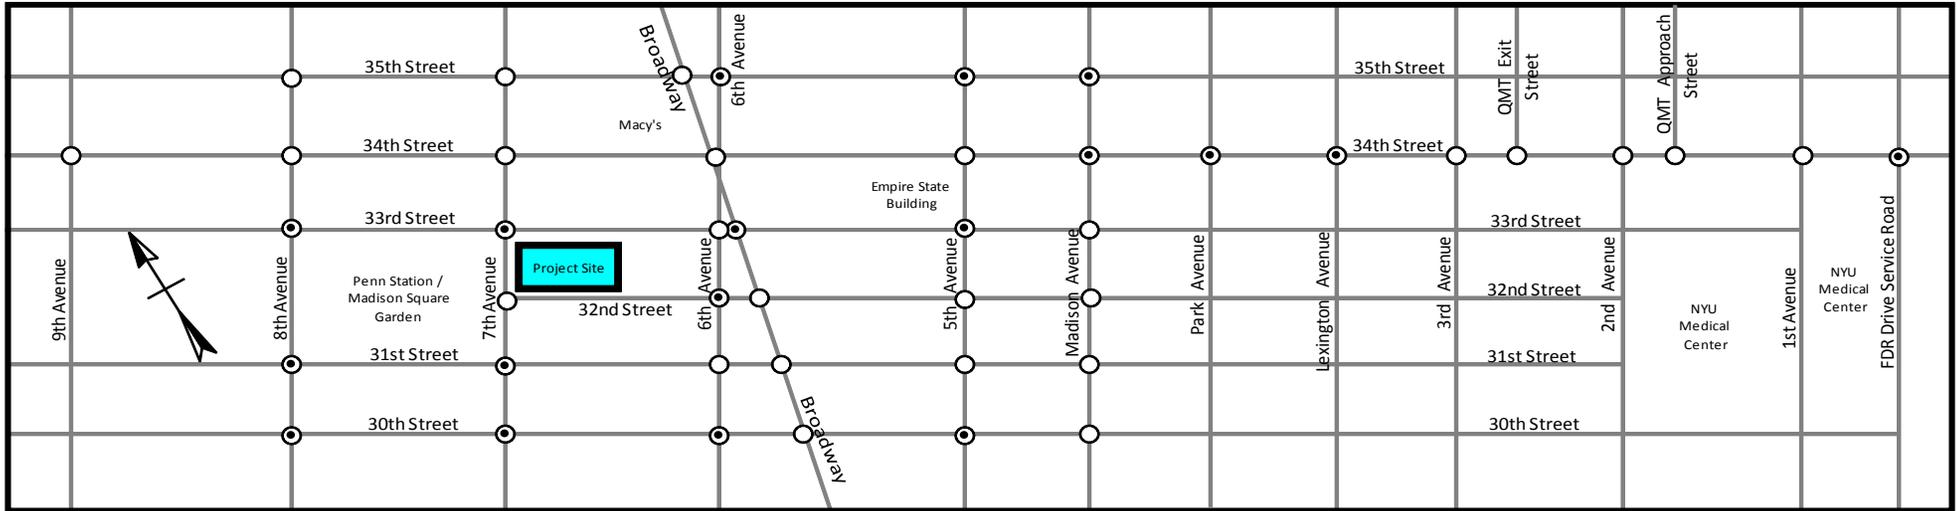

- Project Site
- No Significant Impact
- Significant Impact

15 PENN PLAZA

2014 Future with the Proposed Project—Multi-Tenant Office Scenario
 Intersections with Significant Adverse Impacts
 Weekday PM Peak Hour
 Figure 16-59

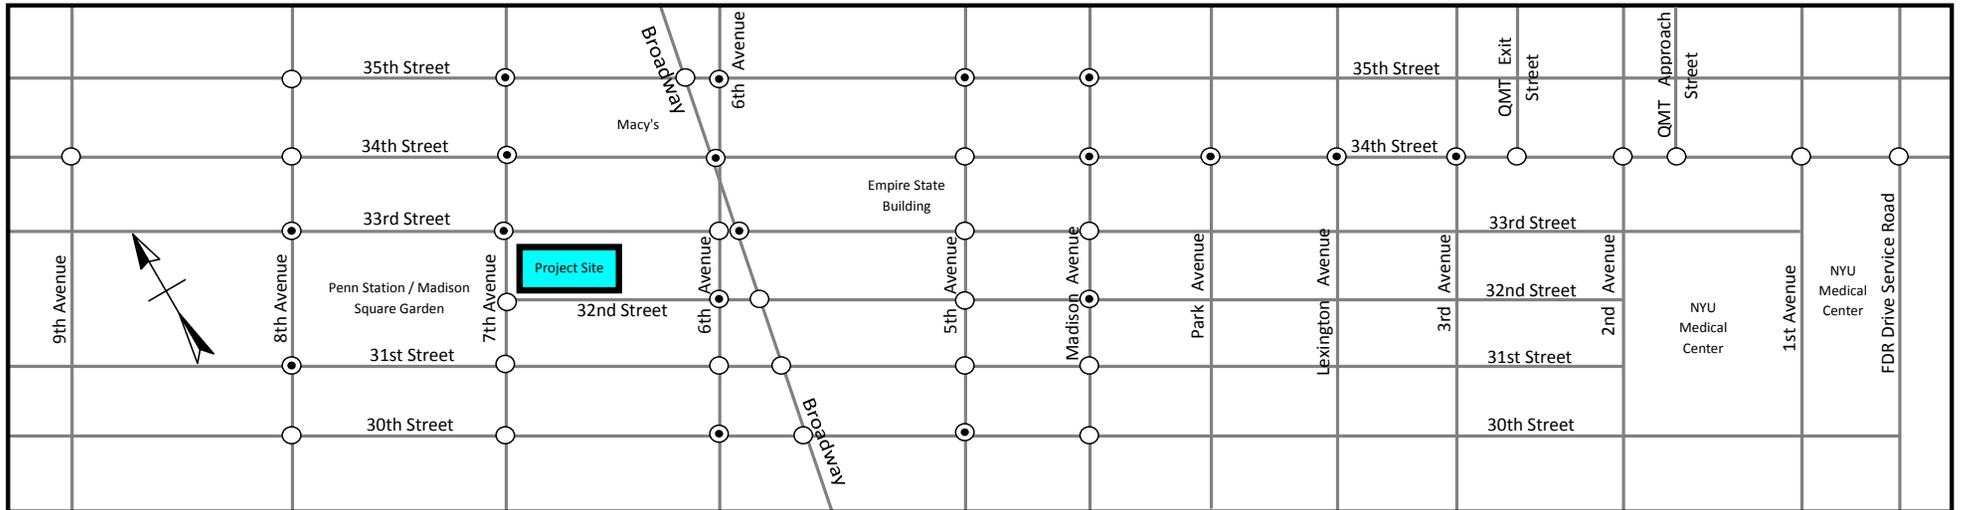

- Project Site
- No Significant Impact
- Significant Impact

15 PENN PLAZA

2014 Future with the Proposed Project—Multi-Tenant Office Scenario
 Intersections with Significant Adverse Impacts
 Saturday Midday Peak Hour
 Figure 16-60

Table 16-22
2014 Future with the Proposed Project—Single-Tenant Office Scenario
Weekday AM Peak Hour
Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Intersection	Weekday AM										
	2014 Future Without the Proposed Action					2014 Future With the Proposed Action - Single-Tenant Scenario					
	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Delay Increment Sec/Veh
Ninth Ave & 34th St	EB	T	0.77	39.6	D	EB	T	0.86	47.7	mid-D	8.1
		R	1.02	163.3	F		R	1.02	163.3	F	0.0
Eighth Ave & 30th St	EB	T	1.04	221.6	F	EB	T	1.06	295.7	F	74.1
Eighth Ave & 31st St	WB	TR	1.18	383.8	F	WB	TR	1.19	387.1	F	3.3
Eighth Ave & 35th St	WB	TR	1.10	437.8	F	WB	TR	1.10	437.8	F	0.0
Seventh Ave & 30th St	EB	T	0.89	45.2	mid-D	EB	T	0.91	49.2	mid-D	4.0
		R	0.90	57.7	E		R	0.90	57.7	E	0.0
Seventh Ave & 33rd St	WB	T	1.06	318.7	F	WB	T	1.10	490.6	F	171.9
Seventh Ave & 35th St	WB	L	0.95	70.2	E	WB	L	0.99	79.0	E	8.8
		T	0.41	45.3	mid-D		T	0.41	45.3	mid-D	0.0
Broadway & 31st St	WB	LT	1.04	217.3	F	WB	LT	1.04	217.3	F	0.0
Broadway & 33rd St	WB	L	0.74	52.4	mid-D	WB	L	0.76	53.9	mid-D	1.5
Sixth Ave & 30th St	EB	L	0.87	59.3	E	EB	L	0.92	68.7	E	9.4
		T	1.00	68.5	E		T	1.00	69.0	E	0.5
Sixth Ave & 32nd St	EB	LT	1.14	515.8	F	EB	LT	1.22	545.5	F	29.7
Sixth Ave & 33rd St	NB	L	0.76	50.0	mid-D	NB	L	0.78	51.7	mid-D	1.7
Sixth Ave & 34th St	EB	T	0.96	61.7	E	EB	T	0.96	61.7	E	0.0
		NB	R	0.69	57.0		E	NB	R	0.69	57.0
Sixth Ave & 35th St	WB	TR	1.26	470.8	F	WB	TR	1.27	478.0	F	7.2
Fifth Ave & 30th St	EB	TR	1.36	413.4	F	EB	TR	1.37	414.4	F	1.0
Fifth Ave & 31st St	WB	T	0.89	50.4	mid-D	WB	T	0.89	50.4	mid-D	0.0
Fifth Ave & 32nd St	EB	R	0.74	46.8	mid-D	EB	R	0.74	46.8	mid-D	0.0
Fifth Ave & 33rd St	WB	LT	0.89	64.8	E	WB	LT	0.91	68.2	E	3.4
Fifth Ave & 35th St	WB	L	0.81	68.1	E	WB	L	0.90	82.3	F	14.2
		T	1.12	253.9	F		T	1.18	279.2	F	25.3
Madison Ave & 30th St	EB	T	1.07	250.0	F	EB	T	1.07	250.7	F	0.7
Madison Ave & 34th St	WB	L	0.76	69.5	E	WB	L	0.80	80.0	E	10.5
		T	0.94	51.2	mid-D		T	0.96	56.2	E	5.0
Madison Ave & 35th St	WB	T	1.25	281.7	F	WB	T	1.31	306.7	F	25.0
		R	0.88	81.0	F		R	0.88	81.0	F	0.0
Park Ave & 34th St	WB	T	1.13	229.4	F	WB	T	1.19	252.8	F	23.4
Lexington Ave & 34th St	WB	T	1.22	263.2	F	WB	T	1.29	289.1	F	25.9
		SB	LT	1.06	129.2		F	SB	LT	1.06	129.2
Third Ave & 34th St	WB	TR	0.88	45.2	mid-D	WB	TR	0.93	50.5	mid-D	5.3
Ramp from I-495 & 34th St	SB	L	0.85	81.6	F	SB	L	0.85	81.6	F	0.0
Second Ave & 34th St	EB	R	1.16	615.2	F	EB	R	1.16	615.2	F	0.0
		DefL	0.73	45.0	D		DefL	0.73	45.3	mid-D	0.3
		T	1.03	104.1	F		T	1.03	104.1	F	0.0
Ramp to I-495 & 34th St	WB	LT	0.95	65.2	E	WB	LT	1.00	75.6	E	10.4
		R	1.03	227.6	F		R	1.03	227.6	F	0.0
First Ave & 34th St	WB	LT	1.08	254.9	F	WB	LT	1.10	263.1	F	8.2
		R	0.89	80.1	F		R	0.89	80.1	F	0.0
FDR Drive & 34th St	EB	L	1.07	347.9	F	EB	L	1.08	349.2	F	1.3
		LTR	0.94	73.8	E		LTR	0.94	74.6	E	0.8
		NB	L	1.15	212.1		F	NB	L	1.19	230.9

Shading denotes approach movement subject to significant adverse impact.

Italics denote approach movement that project that has added less than 5 incremental trips and therefore is not subject to significant adverse impact.

No shading denotes movement with 45.0 or more seconds of delay, but not subject to significant adverse impact.

Table 16-23

2014 Future with the Proposed Project—Single-Tenant Office Scenario
Weekday Midday Peak Hour
Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Intersection	Weekday MD										
	2014 Future Without the Proposed Action					2014 Future With the Proposed Action - Single-Tenant Scenario					
	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Delay Increment Sec/Veh
Ninth Ave & 34th St	EB	R	0.90	68.1	E	EB	R	0.90	68.1	E	0.0
Eighth Ave & 30th St	<i>EB</i>	<i>T</i>	<i>0.72</i>	<i>310.6</i>	<i>F</i>	<i>EB</i>	<i>T</i>	<i>0.72</i>	<i>312.3</i>	<i>F</i>	<i>1.7</i>
Eighth Ave & 31st St	WB	TR	1.37	467.0	F	WB	TR	1.37	467.0	F	0.0
Eighth Ave & 35th St	WB	TR	0.92	50.7	mid-D	WB	TR	0.92	50.7	mid-D	0.0
Seventh Ave & 33rd St	<i>WB</i>	<i>LT</i>	<i>1.19</i>	<i>681.2</i>	<i>F</i>	<i>WB</i>	<i>LT</i>	<i>1.20</i>	<i>690.4</i>	<i>F</i>	<i>9.2</i>
Broadway & 31st St	WB	LT	1.02	146.2	F	WB	LT	1.02	146.2	F	0.0
	SB	TR	0.90	56.6	E	SB	TR	0.90	56.6	E	0.0
Broadway & 33rd St	WB	L	0.77	55.2	E	WB	L	0.77	55.2	E	0.0
Sixth Ave & 30th St	<i>EB</i>	<i>L</i>	<i>0.93</i>	<i>516.1</i>	<i>F</i>	<i>EB</i>	<i>L</i>	<i>0.94</i>	<i>524.1</i>	<i>F</i>	<i>8.0</i>
		<i>T</i>	<i>0.79</i>	<i>170.8</i>	<i>F</i>		<i>T</i>	<i>0.79</i>	<i>170.8</i>	<i>F</i>	<i>0.0</i>
Sixth Ave & 32nd St	EB	LT	1.13	492.3	F	EB	LT	1.13	492.3	F	0.0
Sixth Ave & 33rd St	NB	L	0.92	69.2	E	NB	L	0.93	71.0	E	1.8
Sixth Ave & 34th St	EB	T	0.95	61.2	E	EB	T	0.95	61.2	E	0.0
Sixth Ave & 35th St	WB	TR	0.99	67.2	E	WB	TR	0.99	67.2	E	0.0
Fifth Ave & 30th St	EB	TR	1.22	378.9	F	EB	TR	1.22	378.9	F	0.0
Fifth Ave & 33rd St	WB	LT	1.10	389.2	F	WB	LT	1.10	389.2	F	0.0
Fifth Ave & 35th St	WB	L	0.97	97.4	F	WB	L	0.97	97.4	F	0.0
Madison Ave & 35th St	WB	R	0.80	58.2	E	WB	R	0.80	58.2	E	0.0
Park Ave & 34th St	WB	T	1.07	217.8	F	WB	T	1.07	217.8	F	0.0
Ramp from I-495 & 34th St	SB	L	0.66	58.6	E	SB	L	0.66	58.6	E	0.0
Second Ave & 34th St	EB	R	0.86	77.5	E	EB	R	0.86	77.5	E	0.0
Ramp to I-495 & 34th St	WB	R	1.06	342.0	F	WB	R	1.06	342.0	F	0.0
FDR Drive & 34th St	EB	L	0.99	91.4	F	EB	L	0.99	91.4	F	0.0
		LTR	0.75	48.6	mid-D		LTR	0.75	48.6	mid-D	0.0

Shading denotes approach movement subject to significant adverse impact.

Italics denote approach movement that project that has added less than 5 incremental trips and therefore is not subject to significant adverse impact.

No shading denotes movement with 45.0 or more seconds of delay, but not subject to significant adverse impact.

**Table 16-24
2014 Future with the Proposed Project—Single-Tenant Office Scenario
Weekday PM Peak Hour
Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F**

Intersection	Weekday PM										
	2014 Future Without the Proposed Action					2014 Future With the Proposed Action - Single-Tenant Scenario					
	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Delay Increment Sec/Veh
Ninth Ave & 34th St	EB	R	1.26	405.4	F	EB	R	1.26	405.4	F	0.0
Eighth Ave & 30th St	<i>EB</i>	<i>T</i>	<i>0.73</i>	<i>330.9</i>	<i>F</i>	<i>EB</i>	<i>T</i>	<i>0.73</i>	<i>332.7</i>	<i>F</i>	<i>1.8</i>
Eighth Ave & 31st St	WB	TR	1.29	417.8	F	WB	TR	1.31	427.1	F	9.3
Eighth Ave & 33rd St	NB	LT	1.01	89.7	F	NB	LT	1.02	128.5	F	38.8
Eighth Ave & 35th St	WB	TR	1.35	521.7	F	WB	TR	1.35	521.7	F	0.0
Seventh Ave & 30th St	EB	T	0.79	166.8	F	EB	T	0.79	169.8	F	3.0
		R	0.53	212.9	F		R	0.53	212.9	F	0.0
Seventh Ave & 31st St	SB	R	0.90	55.2	E	SB	R	0.93	59.9	E	4.7
Seventh Ave & 33rd St	WB	LT	0.95	79.6	E	WB	LT	0.98	85.8	F	6.2
	SB	R	1.08	283.7	F	SB	R	1.08	283.7	F	0.0
Broadway & 31st St	SB	TR	0.89	50.3	mid-D	SB	TR	0.90	52.6	mid-D	2.3
Broadway & 33rd St	WB	L	0.81	56.8	E	WB	L	0.95	80.0	E	23.2
Sixth Ave & 30th St	EB	L	0.81	418.2	F	EB	L	0.82	424.7	F	6.5
		T	0.86	200.4	F		T	0.86	202.5	F	2.1
Sixth Ave & 32nd St	EB	LT	1.38	608.8	F	EB	LT	1.40	617.9	F	9.1
Sixth Ave & 33rd St	NB	L	0.77	51.4	mid-D	NB	L	0.79	52.6	mid-D	1.2
Sixth Ave & 35th St	WB	TR	1.13	421.7	F	WB	TR	1.23	466.8	F	45.1
Fifth Ave & 30th St	EB	TR	1.32	402.0	F	EB	TR	1.35	413.8	F	11.8
Fifth Ave & 33rd St	WB	LT	1.00	86.6	F	WB	LT	1.00	86.6	F	0.0
Fifth Ave & 35th St	WB	L	0.58	47.3	mid-D	WB	L	0.58	47.3	mid-D	0.0
		T	0.91	49.6	mid-D		T	0.92	50.9	mid-D	1.3
Madison Ave & 30th St	EB	T	0.86	46.2	mid-D	EB	T	0.87	47.4	mid-D	1.2
Madison Ave & 34th St	WB	T	1.05	182.6	F	WB	T	1.05	182.6	F	0.0
Madison Ave & 35th St	WB	T	1.00	68.2	E	WB	T	1.01	106.7	F	38.5
		R	1.08	427.2	F		R	1.08	427.2	F	0.0
Park Ave & 34th St	WB	T	1.05	203.4	F	WB	T	1.05	204.5	F	1.1
Lexington Ave & 34th St	WB	T	1.11	226.9	F	WB	T	1.11	228.3	F	1.4
	SB	R	0.96	77.1	E	SB	R	0.96	77.1	E	0.0
Ramp from I-495 & 34th St	SB	L	0.58	52.2	mid-D	SB	L	0.58	52.2	mid-D	0.0
Second Ave & 34th St	EB	R	0.76	62.6	E	EB	R	0.76	62.6	E	0.0
Ramp to I-495 & 34th St	WB	R	1.12	578.8	F	WB	R	1.12	578.8	F	0.0
First Ave & 34th St	WB	R	0.70	53.2	mid-D	WB	R	0.70	53.2	mid-D	0.0
FDR Drive & 34th St	EB	L	1.04	243.2	F	EB	L	1.11	384.2	F	141.0
		LTR	0.78	51.9	mid-D		LTR	0.82	56.3	E	4.4
	NB	L	0.97	55.7	E	NB	L	0.97	56.4	E	0.7

Shading denotes approach movement subject to significant adverse impact.

Italics denote approach movement that project that has added less than 5 incremental trips and therefore is not subject to significant adverse impact.

No shading denotes movement with 45.0 or more seconds of delay, but not subject to significant adverse impact.

Table 16-25

2014 Future with the Proposed Project—Single-Tenant Office Scenario
Saturday Midday Peak Hour
Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Intersection	Saturday MD										
	2014 Future Without the Proposed Action					2014 Future With the Proposed Action - Single-Tenant Scenario					
	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Delay Increment Sec/Veh
Eighth Ave & 31st St	WB	TR	1.34	639.3	F	WB	TR	1.34	639.3	F	0.0
Eighth Ave & 33rd St	NB	LT	0.90	58.1	E	NB	LT	0.90	58.1	E	0.0
Eighth Ave & 35th St	WB	TR	1.02	153.1	F	WB	TR	1.02	153.1	F	0.0
Seventh Ave & 33rd St	WB	LT	0.94	72.8	E	WB	LT	0.94	72.8	E	0.0
Seventh Ave & 34th St	EB	T	0.71	274.4	F	EB	T	0.71	274.4	F	0.0
Seventh Ave & 35th St	WB	L	0.84	53.1	mid-D	WB	L	0.84	53.1	mid-D	0.0
Broadway & 31st St	WB	LT	1.22	344.9	F	WB	LT	1.22	344.9	F	0.0
	SB	TR	1.17	269.4	F	SB	TR	1.17	269.4	F	0.0
Broadway & 33rd St	WB	L	0.99	88.8	F	WB	L	0.99	88.8	F	0.0
Sixth Ave & 30th St	L	0.46	231.3	F	EB	L	0.46	231.3	F	0.0	
	T	0.37	69.3	E		T	0.37	69.3	E	0.0	
Sixth Ave & 31st St	WB	TR	0.91	75.2	E	WB	TR	0.91	75.2	E	0.0
Sixth Ave & 32nd St	EB	LT	0.89	56.1	E	EB	LT	0.89	56.1	E	0.0
Sixth Ave & 33rd St	NB	L	0.79	51.9	mid-D	NB	L	0.79	51.9	mid-D	0.0
Sixth Ave & 34th St	EB	T	0.94	272.4	F	EB	T	0.94	272.4	F	0.0
Sixth Ave & 35th St	WB	TR	0.94	55.9	E	WB	TR	0.94	55.9	E	0.0
Fifth Ave & 30th St	EB	TR	1.15	354.4	F	EB	TR	1.15	354.4	F	0.0
Fifth Ave & 31st St	WB	T	0.99	69.5	E	WB	T	0.99	69.5	E	0.0
Fifth Ave & 33rd St	WB	LT	0.78	48.3	mid-D	WB	LT	0.78	48.3	mid-D	0.0
Fifth Ave & 35th St	WB	L	0.81	66.7	E	WB	L	0.81	66.7	E	0.0
Madison Ave & 34th St	EB	L	0.75	71.2	E	EB	L	0.75	71.2	E	0.0
	WB	T	0.97	55.5	E	WB	T	0.97	55.5	E	0.0
Madison Ave & 35th St	WB	R	0.52	45.3	mid-D	WB	R	0.52	45.3	mid-D	0.0
Park Ave & 34th St	WB	T	1.06	194.9	F	WB	T	1.06	194.9	F	0.0
Lexington Ave & 34th St	WB	T	1.12	216.8	F	WB	T	1.12	216.8	F	0.0
Third Ave & 34th St	WB	TR	0.94	52.7	mid-D	WB	TR	0.94	52.7	mid-D	0.0
Ramp from I-495 & 34th St	SB	L	1.12	387.8	F	SB	L	1.12	387.8	F	0.0
Second Ave & 34th St	EB	R	0.81	61.7	E	EB	R	0.81	61.7	E	0.0
Ramp to I-495 & 34th St	WB	R	0.77	65.9	E	WB	R	0.77	65.9	E	0.0

Shading denotes approach movement subject to significant adverse impact.

No shading denotes movement with 45.0 or more seconds of delay, but not subject to significant adverse impact.

Table 16-26
2014 Future with the Proposed Project—Multi-Tenant Office Scenario
Weekday AM Peak Hour
Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Intersection	Weekday AM												
	2014 Future Without the Proposed Action					2014 Future With the Proposed Action - Multi-Tenant Scenario							
	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Delay Increment Sec/Veh		
Ninth Ave & 34th St	EB	R	1.02	163.3	F	EB	R	1.02	163.3	F	0.0		
Eighth Ave & 30th St	EB	T	1.04	221.6	F	EB	T	1.05	258.9	F	37.3		
Eighth Ave & 31st St	WB	TR	1.18	383.8	F	WB	TR	1.18	385.6	F	1.8		
Eighth Ave & 35th St	WB	TR	1.10	437.8	F	WB	TR	1.10	437.8	F	0.0		
Seventh Ave & 30th St	EB	T	0.89	45.2	mid-D	EB	T	0.91	48.3	mid-D	3.1		
		R	0.90	57.7	E		R	0.90	57.7	E	0.0		
Seventh Ave & 33rd St	WB	LT	1.06	318.7	F	WB	LT	1.13	607.8	F	289.1		
Seventh Ave & 35th St	WB	L	0.95	70.2	E	WB	L	0.96	70.9	E	0.7		
		T	0.41	45.3	mid-D		T	0.41	45.3	mid-D	0.0		
Broadway & 31st St	WB	LT	1.04	217.3	F	WB	LT	1.04	217.3	F	0.0		
Broadway & 33rd St	WB	L	0.74	52.4	mid-D	WB	L	0.75	52.7	mid-D	0.3		
Sixth Ave & 30th St	EB	L	0.87	59.3	E	EB	L	0.91	66.4	E	7.1		
		T	1.00	68.5	E		T	1.00	68.5	E	0.0		
Sixth Ave & 32nd St	EB	LT	1.14	515.8	F	EB	LT	1.16	525.2	F	9.4		
Sixth Ave & 33rd St	NB	L	0.76	50.0	mid-D	NB	L	0.79	53.3	mid-D	3.3		
Sixth Ave & 34th St	EB	T	0.96	61.7	E	EB	T	0.96	61.7	E	0.0		
		NB	R	0.69	57.0		E	NB	R	0.69	57.0	E	0.0
Sixth Ave & 35th St	WB	TR	1.26	470.8	F	WB	TR	1.26	470.8	F	0.0		
Fifth Ave & 30th St	EB	TR	1.36	413.4	F	EB	TR	1.36	413.4	F	0.0		
Fifth Ave & 31st St	WB	T	0.89	50.4	mid-D	WB	T	0.89	50.4	mid-D	0.0		
Fifth Ave & 32nd St	EB	R	0.74	46.8	mid-D	EB	R	0.74	46.8	mid-D	0.0		
Fifth Ave & 33rd St	WB	LT	0.89	64.8	E	WB	LT	0.89	66.1	E	1.3		
Fifth Ave & 35th St	WB	L	0.81	68.1	E	WB	L	0.85	73.7	E	5.6		
		T	1.12	253.9	F		T	1.14	261.0	F	7.1		
Madison Ave & 30th St	EB	T	1.07	250.0	F	EB	T	1.07	250.0	F	0.0		
Madison Ave & 34th St	WB	L	0.76	69.5	E	WB	L	0.77	73.4	E	3.9		
		T	0.94	51.2	mid-D		T	0.95	52.8	mid-D	1.6		
Madison Ave & 35th St	WB	T	1.25	281.7	F	WB	T	1.27	290.2	F	8.5		
		R	0.88	81.0	F		R	0.88	81.0	F	0.0		
Park Ave & 34th St	WB	T	1.13	229.4	F	WB	T	1.15	236.1	F	6.7		
Lexington Ave & 34th St	WB	T	1.22	263.2	F	WB	T	1.24	271.5	F	8.3		
		SB	LT	1.06	129.2		F	SB	LT	1.06	129.2	F	0.0
Third Ave & 34th St	WB	TR	0.88	45.2	mid-D	WB	TR	0.90	46.9	mid-D	1.7		
Ramp from I-495 & 34th St	SB	L	0.85	81.6	F	SB	L	0.85	81.6	F	0.0		
Second Ave & 34th St	EB	R	1.16	615.2	F	EB	R	1.16	615.2	F	0.0		
		SB	T	1.03	104.1		F	SB	T	1.03	104.1	F	0.0
Ramp to I-495 & 34th St	WB	LT	0.95	65.2	E	WB	LT	0.96	68.0	E	2.8		
		R	1.03	227.6	F		R	1.03	227.6	F	0.0		
First Ave & 34th St	WB	EB	LT	1.08	254.9	F	WB	EB	LT	1.09	256.9	F	2.0
		R	0.89	80.1	F	R		0.89	80.1	F	0.0		
FDR Drive & 34th St	EB	L	1.07	347.9	F	EB	L	1.07	347.9	F	0.0		
		LTR	0.94	73.8	E		LTR	0.94	73.8	E	0.0		
		NB	L	1.15	212.1		F	NB	L	1.16	217.1	F	5.0

Shading denotes approach movement subject to significant adverse impact.

Italics denote approach movement that project has added less than 5 incremental trips and therefore is not subject to significant adverse impact.

No shading denotes movement with 45.0 or more seconds of delay, but not subject to significant adverse impact.

Table 16-27

2014 Future with the Proposed Project—Multi-Tenant Office Scenario
Weekday Midday Peak Hour
Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Intersection	Weekday MD										
	2014 Future Without the Proposed Action					2014 Future With the Proposed Action - Multi-Tenant Scenario					
	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Delay Increment Sec/Veh
Ninth Ave & 34th St	EB	R	0.90	68.1	E	EB	R	0.90	68.1	E	0.0
Eighth Ave & 30th St	EB	T	0.72	310.6	F	EB	T	0.74	322.6	F	12.0
Eighth Ave & 31st St	WB	TR	1.37	467.0	F	WB	TR	1.45	501.2	F	34.2
Eighth Ave & 33rd St	NB	LT	0.96	40.4	D	NB	LT	0.99	45.4	mid-D	5.0
Eighth Ave & 35th St	WB	TR	0.92	50.7	mid-D	WB	TR	0.92	50.7	mid-D	0.0
Seventh Ave & 33rd St	WB	LT	1.19	681.2	F	WB	LT	1.30	739.2	F	58.0
Broadway & 31st St	WB	LT	1.02	146.2	F	WB	LT	1.02	146.7	F	0.5
	SB	TR	0.90	56.6	E	SB	TR	0.90	56.6	E	0.0
Broadway & 33rd St	WB	L	0.77	55.2	E	WB	L	0.86	66.2	E	11.0
Sixth Ave & 30th St	EB	L	0.93	516.1	F	EB	L	0.99	557.6	F	41.5
		T	0.79	170.8	F		T	0.80	175.7	F	4.9
Sixth Ave & 32nd St	EB	LT	1.13	492.3	F	EB	LT	1.23	529.1	F	36.8
Sixth Ave & 33rd St	NB	L	0.92	69.2	E	NB	L	0.98	81.7	F	12.5
Sixth Ave & 34th St	EB	T	0.95	61.2	E	EB	T	0.98	68.6	E	7.4
Sixth Ave & 35th St	WB	TR	0.99	67.2	E	WB	TR	1.08	376.9	F	309.7
Fifth Ave & 30th St	EB	TR	1.22	378.9	F	EB	TR	1.24	386.0	F	7.1
Fifth Ave & 33rd St	<i>WB</i>	<i>LT</i>	<i>1.10</i>	<i>389.2</i>	<i>F</i>	<i>WB</i>	<i>LT</i>	<i>1.12</i>	<i>393.2</i>	<i>F</i>	<i>4.0</i>
Fifth Ave & 35th St	WB	L	0.97	97.4	F	WB	L	1.02	188.4	F	91.0
Madison Ave & 35th St	WB	R	0.80	58.2	E	WB	R	0.80	58.2	E	0.0
Park Ave & 34th St	WB	T	1.07	217.8	F	WB	T	1.11	232.8	F	15.0
Ramp from I-495 & 34th St	SB	L	0.66	58.6	E	SB	L	0.67	59.2	E	0.6
Second Ave & 34th St	EB	R	0.86	77.5	E	EB	R	0.87	78.8	E	1.3
Ramp to I-495 & 34th St	WB	R	1.06	342.0	F	WB	R	1.06	342.0	F	0.0
FDR Drive & 34th St	EB	L	0.99	91.4	F	EB	L	1.04	254.8	F	163.4
		LTR	0.75	48.6	mid-D		LTR	0.77	50.8	mid-D	2.2

Shading denotes approach movement subject to significant adverse impact.
 Italics denote approach movement that project that has added less than 5 incremental trips and therefore is not subject to significant adverse impact.
 No shading denotes movement with 45.0 or more seconds of delay, but not subject to significant adverse impact.

Table 16-28
2014 Future with the Proposed Project—Multi-Tenant Office Scenario
Weekday PM Peak Hour
Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Intersection	Weekday PM										
	2014 Future Without the Proposed Action					2014 Future With the Proposed Action - Multi-Tenant Scenario					
	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Delay Increment Sec/Veh
Ninth Ave & 34th St	EB	R	1.26	405.4	F	EB	R	1.26	405.4	F	0.0
	WB	DefL	0.81	42.4	D	WB	DefL	0.84	46.3	mid-D	3.9
Eighth Ave & 30th St	EB	T	0.73	330.9	F	EB	T	0.74	335.3	F	4.4
Eighth Ave & 31st St	WB	TR	1.29	417.8	F	WB	TR	1.35	444.1	F	26.3
Eighth Ave & 33rd St	NB	LT	1.01	89.7	F	NB	LT	1.03	139.0	F	49.3
Eighth Ave & 35th St	WB	TR	1.35	521.7	F	WB	TR	1.35	521.7	F	0.0
Seventh Ave & 30th St	EB	T	0.79	166.8	F	EB	T	0.79	171.8	F	5.0
		R	0.53	212.9	F		R	0.53	212.9	F	0.0
Seventh Ave & 31st St	SB	R	0.90	55.2	E	SB	R	0.97	69.1	E	13.9
Seventh Ave & 33rd St	WB	LT	0.95	79.6	E	WB	LT	0.98	86.9	F	7.3
	SB	R	1.08	283.7	F	SB	R	1.10	291.7	F	8.0
Broadway & 31st St	SB	TR	0.89	50.3	mid-D	SB	TR	0.90	52.6	mid-D	2.3
Broadway & 33rd St	WB	L	0.81	56.8	E	WB	L	0.95	80.0	E	23.2
Sixth Ave & 30th St	EB	L	0.81	418.2	F	EB	L	0.83	431.3	F	13.1
		T	0.86	200.4	F		T	0.87	206.7	F	6.3
Sixth Ave & 32nd St	EB	LT	1.38	608.8	F	EB	LT	1.47	644.3	F	35.5
Sixth Ave & 33rd St	NB	L	0.77	51.4	mid-D	NB	L	0.79	53.3	mid-D	1.9
Sixth Ave & 35th St	WB	TR	1.13	421.7	F	WB	TR	1.25	476.7	F	55.0
Fifth Ave & 30th St	EB	TR	1.32	402.0	F	EB	TR	1.36	417.8	F	15.8
Fifth Ave & 33rd St	WB	LT	1.00	86.6	F	WB	LT	1.01	127.6	F	41.0
Fifth Ave & 35th St	WB	L	0.58	47.3	mid-D	WB	L	0.61	48.9	mid-D	1.6
		T	0.91	49.6	mid-D		T	0.96	60.0	E	10.4
Madison Ave & 30th St	EB	T	0.86	46.2	mid-D	EB	T	0.88	48.0	mid-D	1.8
Madison Ave & 34th St	WB	T	1.05	182.6	F	WB	T	1.06	186.3	F	3.7
Madison Ave & 35th St	WB	T	1.00	68.2	E	WB	T	1.05	208.4	F	140.2
		R	1.08	427.2	F		R	1.08	427.2	F	0.0
Park Ave & 34th St	WB	T	1.05	203.4	F	WB	T	1.08	212.6	F	9.2
Lexington Ave & 34th St	WB	T	1.11	226.9	F	WB	T	1.14	238.3	F	11.4
	SB	R	0.96	77.1	E	SB	R	0.96	77.1	E	0.0
Ramp from I-495 & 34th St	SB	L	0.58	52.2	mid-D	SB	L	0.58	52.2	mid-D	0.0
Second Ave & 34th St	EB	R	0.76	62.6	E	EB	R	0.76	62.6	E	0.0
Ramp to I-495 & 34th St	WB	R	1.12	578.8	F	WB	R	1.12	578.8	F	0.0
First Ave & 34th St	WB	R	0.70	53.2	mid-D	WB	R	0.70	53.2	mid-D	0.0
FDR Drive & 34th St	EB	L	1.04	243.2	F	EB	L	1.12	387.4	F	144.2
		LTR	0.78	51.9	mid-D		LTR	0.82	56.3	E	4.4
	NB	L	0.97	55.7	E	NB	L	0.99	60.1	E	4.4

Shading denotes approach movement subject to significant adverse impact.

No shading denotes movement with 45.0 or more seconds of delay, but not subject to significant adverse impact.

Table 16-29

2014 Future with the Proposed Project—Multi-Tenant Office Scenario
Saturday Midday Peak Hour
Intersection Approach Movements at Mid-LOS D, LOS E, or LOS F

Intersection	Saturday MD										
	2014 Future Without the Proposed Action					2014 Future With the Proposed Action - Multi-Tenant Scenario					
	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Approach	Movement	V/C Ratio	Delay Sec/Veh	LOS	Delay Increment Sec/Veh
Eighth Ave & 31st St	WB	TR	1.34	639.3	F	WB	TR	1.39	661.7	F	22.4
Eighth Ave & 33rd St	NB	LT	0.90	58.1	E	NB	LT	0.92	66.4	E	8.3
Eighth Ave & 35th St	WB	TR	1.02	153.1	F	WB	TR	1.02	153.1	F	0.0
Seventh Ave & 33rd St	WB	LT	0.94	72.8	E	WB	LT	0.97	81.6	F	8.8
Seventh Ave & 34th St	EB	T	0.71	274.4	F	EB	T	0.73	286.9	F	12.5
Seventh Ave & 35th St	WB	L	0.84	53.1	mid-D	WB	L	0.96	73.2	E	20.1
Broadway & 31st St	WB	LT	1.22	344.9	F	WB	LT	1.22	344.9	F	0.0
	SB	TR	1.17	269.4	F	SB	TR	1.17	269.4	F	0.0
Broadway & 33rd St	WB	L	0.99	88.8	F	WB	L	1.06	321.2	F	232.4
Sixth Ave & 30th St	EB	L	0.46	231.3	F	EB	L	0.48	240.7	F	9.4
		T	0.37	69.3	E		T	0.38	70.1	E	0.8
Sixth Ave & 31st St	WB	TR	0.91	75.2	E	WB	TR	0.91	75.2	E	0.0
Sixth Ave & 32nd St	EB	LT	0.89	56.1	E	EB	LT	0.99	77.1	E	21.0
Sixth Ave & 33rd St	NB	L	0.79	51.9	mid-D	NB	L	0.81	54.1	mid-D	2.2
Sixth Ave & 34th St	EB	T	0.94	272.4	F	EB	T	0.98	294.6	F	22.2
Sixth Ave & 35th St	WB	TR	0.94	55.9	E	WB	TR	1.04	225.2	F	169.3
Fifth Ave & 30th St	EB	TR	1.15	354.4	F	EB	TR	1.16	360.1	F	5.7
Fifth Ave & 31st St	WB	T	0.99	69.5	E	WB	T	0.99	69.5	E	0.0
Fifth Ave & 33rd St	WB	LT	0.78	48.3	mid-D	WB	LT	0.78	49.0	mid-D	0.7
Fifth Ave & 35th St	WB	L	0.81	66.7	E	WB	L	0.87	74.2	E	7.5
Madison Ave & 32nd St	EB	L	0.77	42.0	D	EB	L	0.83	47.8	mid-D	5.8
Madison Ave & 34th St	EB	L	0.75	71.2	E	EB	L	0.75	71.2	E	0.0
	WB	T	0.97	55.5	E	WB	T	0.99	59.8	E	4.3
Madison Ave & 35th St	WB	T	0.86	42.2	D	WB	T	0.91	47.9	mid-D	5.7
		R	0.52	45.3	mid-D		R	0.52	45.3	mid-D	0.0
Park Ave & 34th St	WB	T	1.06	194.9	F	WB	T	1.10	209.4	F	14.5
Lexington Ave & 34th St	WB	T	1.12	216.8	F	WB	T	1.17	234.0	F	17.2
Third Ave & 34th St	WB	TR	0.94	52.7	mid-D	WB	TR	0.97	57.7	E	5.0
Ramp from I-495 & 34th St	SB	L	1.12	387.8	F	SB	L	1.12	387.8	F	0.0
Second Ave & 34th St	EB	R	0.81	61.7	E	EB	R	0.82	62.4	E	0.7
Ramp to I-495 & 34th St	WB	LT	0.75	44.2	D	WB	LT	0.78	46.1	mid-D	1.9
		R	0.77	65.9	E		R	0.77	65.9	E	0.0
FDR Drive & 34th St	EB	L	0.70	44.9	D	EB	L	0.74	47.7	mid-D	2.8

Shading denotes approach movement subject to significant adverse impact.

No shading denotes movement with 45.0 or more seconds of delay, but not subject to significant adverse impact.

PARKING

Both the Single-Tenant Office Scenario and Multi-Tenant Office Scenario were analyzed to determine the impact on off-street parking demand during the weekday midday analysis period. Hourly parking demand was calculated for each scenario. As described for the 2014 No Action condition, no on-street parking supply was assumed to be available to absorb future parking demand. As stated above, a total of up to 100 accessory parking spaces would be provided on the development site as a result of the proposed project. **Tables 16-30 and 16-31** summarize the hour-by-hour parking demand for each build Scenario.

Table 16-30

Hour-by-Hour Parking Accumulation: Single Tenant Office Scenario

TIME PERIOD			TOTAL DEMAND: (SINGLE-TENANT)		Running Total
			IN	OUT	
12:00 AM	–	1:00 AM	0	0	0
1:00 AM	–	2:00 AM	0	0	0
2:00 AM	–	3:00 AM	0	0	0
3:00 AM	–	4:00 AM	0	0	0
4:00 AM	–	5:00 AM	0	0	0
5:00 AM	–	6:00 AM	0	0	0
6:00 AM	–	7:00 AM	4	0	4
7:00 AM	–	8:00 AM	52	2	54
8:00 AM	–	9:00 AM	359	9	404
9:00 AM	–	10:00 AM	174	18	560
10:00 AM	–	11:00 AM	27	40	547
11:00 AM	–	12:00 PM	8	11	544
12:00 PM	–	1:00 PM	20	23	541
1:00 PM	–	2:00 PM	23	19	545
2:00 PM	–	3:00 PM	73	48	570
3:00 PM	–	4:00 PM	30	32	568
4:00 PM	–	5:00 PM	21	185	404
5:00 PM	–	6:00 PM	13	377	40
6:00 PM	–	7:00 PM	9	43	6
7:00 PM	–	8:00 PM	4	10	0
8:00 PM	–	9:00 PM	1	1	0
9:00 PM	–	10:00 PM	0	0	0
10:00 PM	–	11:00 PM	0	0	0
11:00 PM	–	12:00 AM	0	0	0

Table 16-31

Hour-by-Hour Parking Accumulation: Multi-Tenant Office Scenario

TIME PERIOD			TOTAL DEMAND: (MULTI-TENANT)		Running Total
			IN	OUT	
12:00 AM	–	1:00 AM	0	0	0
1:00 AM	–	2:00 AM	0	0	0
2:00 AM	–	3:00 AM	0	0	0
3:00 AM	–	4:00 AM	0	0	0
4:00 AM	–	5:00 AM	0	0	0
5:00 AM	–	6:00 AM	0	0	0
6:00 AM	–	7:00 AM	0	0	0
7:00 AM	–	8:00 AM	21	2	19
8:00 AM	–	9:00 AM	238	9	248
9:00 AM	–	10:00 AM	197	21	424
10:00 AM	–	11:00 AM	109	85	448
11:00 AM	–	12:00 PM	99	68	479
12:00 PM	–	1:00 PM	115	100	494
1:00 PM	–	2:00 PM	112	99	507
2:00 PM	–	3:00 PM	171	143	535
3:00 PM	–	4:00 PM	117	127	525
4:00 PM	–	5:00 PM	113	245	393
5:00 PM	–	6:00 PM	102	369	126
6:00 PM	–	7:00 PM	89	127	88
7:00 PM	–	8:00 PM	92	87	93
8:00 PM	–	9:00 PM	56	81	68
9:00 PM	–	10:00 PM	20	88	0
10:00 PM	–	11:00 PM	0	0	0
11:00 PM	–	12:00 AM	0	0	0

As previously stated, most of the parking study area's curbside regulations restrict weekday daytime usage to commercial loading/unloading activities and authorized vehicles, or prohibit parking overall. This condition is not expected to change in the future, and no on-street parking availability was assumed in the future, as was assumed for existing conditions.

Table 16-32 provides the 2014 off-street parking utilization projections for both development scenarios. As shown, the maximum weekday midday parking demand would occur for the Single-Tenant Office Scenario. For this scenario, anticipated 2014 off-street parking facilities have an occupancy rate of 100 percent with 4 available spaces during the weekday midday hour. For the Multi-Tenant Office Scenario, anticipated 2014 off-street parking facilities have an occupancy rate of 99 percent with approximately 40 available spaces during the weekday midday hour.

Table 16-32

2014 Future with the Proposed Project: Off-Street Parking Utilization

Analysis Period	Total Capacity	Parking Demand			Utilization Rate	Available Spaces
		No Action	Build Increment ¹	Total Demand		
Single-Tenant Office Scenario						
Weekday Midday	7,040	6,566	470	7,036	100%	4
Multi-Tenant Office Scenario						
Weekday Midday	7,040	6,566	435	7,001	99%	39
Note: ¹ Of the parking demand generated by the Proposed Project, 100 vehicles would be accommodated in the 100-space accessory parking on-site with the remaining demand parking in off-street facilities within the study area.						

As noted above, the 100 space accessory parking lot located on the development site would not be sufficient to accommodate all of the parking demand for either build scenario. As the table above shows, however, there is sufficient off-street parking available in the study area to accommodate the additional parking demand.

Though a parking shortfall does not occur, according to the *CEQR Technical Manual*, for proposed actions within the Manhattan Business District (defined as the area south of 61st Street), the inability of the proposed action or the surrounding area to accommodate projected future parking demands is not deemed to be a significant adverse impact. The unsatisfied demand for parking spaces during the midday peak utilization period would result in vehicles parking outside of the parking study area and motorists walking greater distances to their destinations. As parking shortfalls do not constitute significant adverse impacts for CEQR purposes, mitigation is not required.

TRAFFIC SAFETY

EXISTING STUDY AREA ACCIDENT PATTERNS

Accident data for intersections within the study area were obtained from NYCDOT. This information provides available accident data from 2006 to 2008 and is presented in **Table 16-33**. The table provides, by intersection, the total number of accidents, the total number of reportable accidents (involving fatality, injury, or more than \$1,000 in property damage), the number of fatalities and injuries during the study period, as well as a yearly breakdown of pedestrian- and bicycle-related injuries or fatalities at each intersection.

As indicated in **Table 16-33**, several intersections in the study area exceed the CEQR criteria of five or more pedestrian-related accidents during any one year over the three-year accident history period. The following intersections experienced five or more combined pedestrian and bicycle related accidents over the three-year accident history period:

- Ninth Avenue – The intersection of Ninth Avenue and West 34th Street.
- Eighth Avenue – The intersections of Eighth Avenue and West 30th Street, West 31st Street, West 33rd Street, and West 34th Street.
- Seventh Avenue – The intersections of Seventh Avenue and West 32nd Street, West 33rd Street, West 34th Street, and West 35th Street.
- Third Avenue – The intersection of Third Avenue and East 34th Street.
- Lexington Avenue – The intersection of Lexington Avenue and East 34th Street.

**Table 16-33
2006 to 2008 Accident History**

Intersection		2006, 2007, 2008			Injuries or Fatalities by Year								
		Overall Accidents ¹			Pedestrian			Bicycle			Combined ²		
Main Street	Cross Street	Reportable Accidents	Fatalities	Injuries	2006	2007	2008	2006	2007	2008	2006	2007	2008
Ninth Ave	W 34th St.	25	0	32	5	2	2	1	1	2	6	3	4
Eighth Ave	W 30th St.	14	0	15	2	8	3	1	0	0	3	8	3
Eighth Ave	W 31st St.	11	0	15	0	2	5	0	2	1	0	4	6
Eighth Ave	Post Office X-ing	2	0	2	0	0	0	0	0	0	0	0	0
Eighth Ave	W 33rd St.	17	0	19	4	1	3	2	2	1	6	3	4
Eighth Ave	W 34th St.	52	0	60	13	7	10	5	1	2	18	8	12
Eighth Ave	W 35th St.	6	0	6	0	3	1	1	1	0	1	4	1
Seventh Ave	W 30th St.	12	0	15	0	2	3	0	1	0	0	3	3
Seventh Ave	W 31st St.	16	0	16	2	1	2	1	2	2	3	3	4
Seventh Ave	W 32nd St.	12	0	15	2	6	4	0	0	0	2	6	4
Seventh Ave	W 33rd St.	18	0	20	3	7	3	1	0	0	4	7	3
Seventh Ave	W 34th St.	40	0	54	6	7	9	2	0	0	8	7	9
Seventh Ave	W 35th St.	18	0	23	5	8	3	0	0	0	5	8	3
Sixth Ave	W 30th St.	13	0	9	2	1	1	1	1	1	3	2	2
Sixth Ave	W 31st St.	8	0	9	0	1	0	0	1	0	0	2	0
Sixth Ave	W 32nd St.	21	0	20	2	1	1	0	1	2	2	2	3
Sixth Ave	W 33rd St.	8	0	7	1	1	1	0	0	0	1	1	1
Sixth Ave	W 34th St.	25	0	27	2	2	1	1	2	0	3	4	1
Sixth Ave	W 35th St.	9	0	9	0	0	2	2	1	1	2	1	3
Broadway	W 35th St.	5	0	1	0	0	0	0	0	0	0	0	0
Broadway	W 33rd St.	7	0	8	0	3	1	0	1	1	0	4	2
Broadway	W 32nd St.	8	0	4	1	0	1	0	0	0	1	0	1
Broadway	W 31st St.	10	0	7	0	2	0	1	0	0	1	2	0
Broadway	W 30th St.	6	0	6	1	2	2	0	0	0	1	2	2
Fifth Ave	E 35th St.	16	0	13	1	2	0	2	0	0	3	2	0
Fifth Ave	E 33rd St.	12	0	8	2	2	1	0	1	0	2	3	1
Fifth Ave	E 32nd St.	17	0	15	0	1	1	1	0	1	1	1	2
Fifth Ave	E 31st St.	7	0	5	1	2	0	0	0	0	1	2	0
Fifth Ave	E 30th St.	8	0	6	0	2	0	0	0	0	0	2	0
Madison Ave	E 30th St.	8	0	8	1	0	2	1	0	1	2	0	3
Madison Ave	E 31st St.	5	0	4	0	1	1	0	0	0	0	1	1
Madison Ave	E 32nd St.	5	0	2	0	0	1	0	0	0	0	0	1
Madison Ave	E 33rd St.	3	0	3	0	0	1	0	0	1	0	0	2
Madison Ave	E 35th St.	3	0	4	0	0	2	0	0	0	0	0	2
E 34th St.	FDR Dr. SR	6	0	7	0	0	0	0	0	0	0	0	0
E 34th St.	FDR Dr. SR	17	1	14	0	0	0	0	0	0	0	0	0
E 34th St.	First Ave	32	0	24	4	0	2	0	1	0	4	1	2
E 34th St.	I-495 Entrance	4	0	3	2	0	0	0	0	0	2	0	0
E 34th St.	Second Ave	32	0	20	3	3	3	1	1	0	4	4	3
E 34th St.	I-495 Exit	8	0	5	0	0	0	0	0	0	0	0	0
E 34th St.	Third Ave	43	0	34	6	2	5	0	0	0	6	2	5
E 34th St.	Lexington Ave	29	0	25	3	2	5	0	1	5	3	3	10
E 34th St.	Park Ave NB	12	0	10	2	1	0	0	0	0	2	1	0
E 34th St.	Park Ave SB	18	0	26	0	0	2	0	1	0	0	1	2
E 34th St.	Madison Ave	19	0	22	0	2	0	2	0	0	2	2	0
E 34th St.	Fifth Ave	20	0	25	3	0	2	0	0	1	3	0	3

Notes:
1 Overall accidents includes accidents involving one or more motor vehicles or a motor vehicle with a pedestrian or bicycle.
2 A combined total of five or more pedestrian and/or bicycle related accidents in any one year is the CEQR criteria for identifying a high accident location.

Source: NYCDOT

Significant changes have occurred in the study area, after 2008, which would have the effect of changing pedestrian and bicycle accident patterns in the study area in the future in comparison to the accident history over the 2006 to 2008 period. These changes include the installation of a Class 1 Bicycle Path (separated on-street path) on Ninth Avenue from south of the study area to West 31st Street and a Class 2 Bicycle Lane (on-street striped route) on Eighth Avenue.

Also, with the implementation of the exclusive bus lanes on West 34th Street, certain turning movements were prohibited, including the eastbound West 34th Street left turn at Eighth Avenue and the westbound East 34th Street left turn at Lexington Avenue. These turn restrictions would reduce the number of vehicle/pedestrian conflicts at these high accident locations along the 34th Street corridor. A left turn pocket was also created for eastbound East 34th Street left turning vehicles at Third Avenue. The addition of the turn pocket improves visibility for pedestrians to observe left turning vehicles as they are no longer turning from a through travel lane.

The second phase of the exclusive bus lanes on 34th Street has also been announced by NYCDOT. This project, called the 34th Street Transitway project discussed earlier in the chapter, would also improve pedestrian conditions along the 34th Street Corridor. The Transitway would create a new pedestrian plaza between Fifth and Sixth Avenues and other pedestrian mobility, safety, and comfort enhancements along the corridor.

The Green Light for Midtown project, announced as a permanent project in 2010, would be the new configuration for Broadway. The project includes the complete closure of Broadway to through traffic at Times Square and Herald Square, as well as other geometric changes on Broadway between Columbus Circle and West 26th Street. In the study area, the project creates pedestrian plazas and reduces vehicle-pedestrian intersections at high traffic areas around Herald Square along 34th Street. As part of this project, green time for through traffic along northbound Sixth Avenue was increased. This increase has caused a shift in northbound vehicular through traffic from Eighth Avenue to Sixth Avenue, reducing the total vehicular volume on Eighth Avenue and therefore reducing vehicle-pedestrian interactions in the Eighth Avenue corridor.

In addition, NYCDOT has initiated specific pedestrian safety programs in the study area, such as implementation of lead pedestrian intervals and the Safe Streets for Seniors program, which provides increased pedestrian clearance time at intersections where concentrations of senior citizens have been identified.

NYCDOT is planning to implement pedestrian safety improvements on Seventh Avenue from West 31st to West 34th Streets, consisting of corner bulb-outs to increase pedestrian circulation space on street corners and curblane relocations to widen sidewalks. These corner bulb-outs also serve to reduce crossing distance at these intersections.

As discussed in Chapter 22, "Mitigation," proposed pedestrian mitigation measures would include 3 new bulb outs at 3 intersections and crosswalk widening for 2 crosswalks in the pedestrian study area. The proposed bulb outs and crosswalk widening would be at intersections along West 32nd, West 33rd and West 34th Streets at Broadway and Sixth Avenue.

The measures detailed above that have been implemented by NYCDOT, in combination with the Proposed Project's mitigation measures, are anticipated to provide benefits to study area pedestrian and bicycle safety. Therefore, the Proposed Project would not reasonably be expected to significantly increase the number of accidents in the study area. *