

126 NORTH 6TH STREET
BROOKLYN, NEW YORK

Remedial Action Work Plan

NYC VCP Number: 12CBCP041K
E-Designation Site Number: 11EH-AZ006K

Prepared for:

114 N Sixth Realty Corp.
86-15 214th Street
Queens, NY 11427

Prepared by:

Hydro Tech Environmental, Corp.
15 Ocean Avenue, 2nd Floor
Brooklyn, NY 11225
<http://www.hydrotechenvironmental.com>

FEBRUARY 2012

REMEDIAL ACTION WORK PLAN

TABLE OF CONTENTS

TABLE OF CONTENTS.....	ii
LIST OF ACRONYMS.....	v
CERTIFICATION	vii
EXECUTIVE SUMMARY.....	viii
Community Protection Statement.....	xi
REMEDIAL ACTION WORK PLAN	1
1.0 SITE BACKGROUND.....	1
1.1 Site Location and Current Usage.....	1
1.2 Proposed Redevelopment Plan	1
1.3 Description of Surrounding Property.....	2
1.4 Remedial Investigation	2
2.0 REMEDIAL ACTION OBJECTIVES	6
3.0 REMEDIAL ALTERNATIVES ANALYSIS.....	7
3.1 Threshold Criteria	7
3.2 Balancing Criteria	8
4.0 REMEDIAL ACTION	14
4.1 Summary of Preferred Remedial Action.....	14
4.2 Soil Cleanup Objectives and Soil/Fill Management.....	16
4.3 Engineering Controls	16
4.4 Institutional Controls	16
4.5 Site Management Plan	16
4.6 Qualitative Human Health Exposure Assessment	16
5.0 REMEDIAL ACTION MANAGEMENT	26
5.1 Project Organization and Oversight.....	26
5.2 Site Security	26
5.3 Work Hours.....	26
5.4 Construction Health and Safety Plan (HASP)	26
5.5 Community Air Monitoring Plan.....	27
5.6 Agency Approvals	29

5.7	Site Preparation	30
5.8	Traffic Control	31
5.9	Demobilization.....	31
5.10	Reporting and Record Keeping.....	32
5.11	Complaint Management.....	33
5.12	Deviations from the Remedial Action Work Plan	33
5.13	DUSR.....	34
6.0	REMEDIAL ACTION REPORT	35
7.0	SCHEDULE	37

FIGURES

- Figure-1: Site Location Map
- Figure-2: Site Boundary Map
- Figure-3: Layout of Proposed Site Development

APPENDICES

- Appendix-1: Citizen Participation Plan
- Appendix-2: Soils/Materials Management Plan

LIST OF ACRONYMS

Acronym	Definition
AOC	Area of Concern
AS/SVE	Air Sparging/Soil Vapor Extraction
BOA	Brownfield Opportunity Area
CAMP	Community Air Monitoring Plan
C/D	Construction/Demolition
COC	Certificate of Completion
CQAP	Construction Quality Assurance Plan
CSOP	Contractors Site Operation Plan
DCR	Declaration of Covenants and Restrictions
ECs/ICs	Engineering and Institutional Controls
HASP	Health and Safety Plan
IRM	Interim Remedial Measure
VCA	Voluntary Cleanup Agreement
MNA	Monitored Natural Attenuation
NOC	Notice of Completion
NYC VCP	New York City Voluntary Cleanup Program
NYC DEP	New York City Department of Environmental Protection
NYC DOHMH	New York State Department of Health and Mental Hygiene
NYCRR	New York Codes Rules and Regulations
NYC OER	New York City Office of Environmental Remediation
NYS DEC	New York State Department of Environmental Conservation
NYS DEC DER	New York State Department of Environmental Conservation Division of Environmental Remediation
NYS DOH	New York State Department of Health
NYS DOT	New York State Department of Transportation
ORC	Oxygen-Release Compound
OSHA	United States Occupational Health and Safety Administration
PE	Professional Engineer

PID	Photo Ionization Detector
QEP	Qualified Environmental Professional
QHHEA	Qualitative Human Health Exposure Assessment
RAOs	Remedial Action Objectives
RAR	Remedial Action Report
RAWP	Remedial Action Work Plan or Plan
RCA	Recycled Concrete Aggregate
RD	Remedial Design
RI	Remedial Investigation
RMZ	Residual Management Zone
SCOs	Soil Cleanup Objectives
SCG	Standards, Criteria and Guidance
SMP	Site Management Plan
SPDES	State Pollutant Discharge Elimination System
SVOC	Semi-Volatile Organic Compound
USGS	United States Geological Survey
UST	Underground Storage Tank
VOC	Volatile Organic Compound

CERTIFICATION

I, Shaik A. Saad, am a Professional Engineer licensed in the State of New York. I have primary direct responsibility for implementation of the remedial action for the 126 North 6th Street Site.

I, Mark E. Robbins, am a Qualified Environmental Professional as defined in §43-140. I have primary direct responsibility for implementation of the remedial action for the 126 North 6th Street Site.

I certify that this Remedial Action Work Plan (RAWP) has a plan for handling, transport and disposal of soil, fill, fluids and other materials removed from the property in accordance with applicable City, State and Federal laws and regulations. Importation of all soil, fill and other material from off-Site will be in accordance with all applicable City, State and Federal laws and requirements. This RAWP has provisions to control nuisances during the remediation and all invasive work, including dust and odor suppression.

Name

NYS PE License Number

Signature

Date



QEP Name

QEP Signature

Date

EXECUTIVE SUMMARY

114 N Sixth Realty Corp. has enrolled in the New York City Voluntary Cleanup Program (NYC VCP) to investigate and remediate a 2,500-square foot site located at 126 North 6th Street in Brooklyn, New York. A remedial investigation (RI) was performed to compile and evaluate data and information necessary to develop this Remedial Action Work Plan (RAWP). The remedial action described in this document provides for the protection of public health and the environment consistent with the intended property use, complies with applicable environmental standards, criteria and guidance and conforms with applicable laws and regulations.

Site Location and Current Usage

The Site is located at 126 North 6th Street in the Williamsburg section in Brooklyn, New York and is identified as Block 2335 and Lot 6 on the New York City Tax Map. Figure 1 shows the Site location. The Site is 2,500-square feet and is bounded by North 6th Street to the north, multi-story residential building to the south, 1-story commercial building to the east, and 1-story commercial building to the west. A map of the site boundary is shown in Figure 2. Currently, the Site is vacant.

Summary of Proposed Redevelopment Plan

The proposed future use of the Site will consist of 1-story commercial use building with a full basement. The basement slab will be 8 feet below grade; anticipated excavation depths will approach 9 feet below grade. The basement will be used for retail space and storage. No open space is proposed.

Layout of the proposed site development is presented in Figure 3. The current zoning designation is M1-2/R6A. The proposed use is consistent with existing zoning for the property.

The remedial action contemplated under this RAWP may be implemented independently of the proposed redevelopment plan.

Summary of the Remedy

The proposed remedial action achieves protection of public health and the environment for the intended use of the property.

The proposed remedial action achieves all of the remedial action objectives established for the project and addresses applicable standards, criterion, and guidance; is effective in both the short-term and long-term and reduces mobility, toxicity and volume of contaminants; is cost effective and implementable; and uses standard methods that are well established in the industry.

The proposed remedial action will consist of:

1. Preparation of a Community Protection Statement and implementation of a Citizen Participation Plan.
2. Performance of a Community Air Monitoring Program for particulates and volatile organic carbon compounds.
3. Establishment of Track 4 Soil Cleanup Objectives (SCOs). End-point samples will also be compared to Track 1 SCOs to determine if Track 1 level of remediation is achieved.
4. Excavation and removal of soil/fill exceeding Track 4 SCOs.
5. Collection and analysis of end-point samples to determine the performance of the remedy with respect to attainment of SCOs.
6. Removal of underground storage tanks and closure of petroleum spills in compliance with applicable local, State and Federal laws and regulations.
7. Construction and maintenance of an engineered composite cover consisting of a building slab covering the entire site to prevent human exposure to residual soil/fill remaining under the Site.
8. Installation of a vapor barrier system beneath the foundation and sidewalls.
9. Installation and operation of an active sub-slab depressurization system.
10. Demarcation of residual soil/fill.
11. Import of materials to be used for backfill and cover in compliance with this plan and in accordance with applicable laws and regulations.

12. Transportation and off-Site disposal of all soil/fill material at permitted facilities in accordance with applicable laws and regulations for handling, transport, and disposal, and this plan. Sampling and analysis of excavated media as required by disposal facilities. Appropriate segregation of excavated media onsite.
13. Screening of excavated soil/fill during intrusive work for indications of contamination by visual means, odor, and monitoring with a PID.
14. Site mobilization involving Site security setup, equipment mobilization, utility mark outs and marking & staking excavation areas.
15. Implementation of storm-water pollution prevention measures in compliance with applicable laws and regulations.
16. Performance of all activities required for the remedial action, including permitting requirements and pretreatment requirements, in compliance with applicable laws and regulations.
17. Submission of a RAR that describes the remedial activities, certifies that the remedial requirements have been achieved, defines the Site boundaries, and describes all Engineering and Institutional Controls to be implemented at the Site, and lists any changes from this RAWP.
18. Submission of an approved Site Management Plan (SMP) in the RAR for long-term management of residual contamination, including plans for operation, maintenance, monitoring, inspection and certification of Engineering and Institutional Controls and reporting at a specified frequency.
19. Recording of a Declaration of Covenants and Restrictions that includes a listing of Engineering Controls and a requirement that management of these controls must be in compliance with an approved SMP; and Institutional Controls including prohibition of the following: (1) vegetable gardening and farming; (2) use of groundwater without treatment rendering it safe for the intended use; (3) disturbance of residual contaminated material unless it is conducted in accordance with the SMP; and (4) higher level of land usage without OER-approval.

Community Protection Statement

The Office of Environmental Remediation created the New York City Voluntary Cleanup Program (NYC VCP) to provide governmental oversight for the cleanup of contaminated property in NYC. This Remedial Action Work Plan (“cleanup plan”) describes the findings of prior environmental studies that show the location of contamination at the site, and describes the plans to clean up the site to protect public health and the environment.

This cleanup plan provides a very high level of protection for neighboring communities. This cleanup plan also includes many other elements that address common community concerns, such as community air monitoring, odor, dust and noise controls, hours of operation, good housekeeping and cleanliness, truck management and routing, and opportunities for community participation. The purpose of this Community Protection Statement is to explain these community protection measures in non-technical language to simplify community review.

Remedial Investigation and Cleanup Plan. Under the NYC VCP, a thorough cleanup study of this property (called a remedial investigation) has been performed to identify past property usage, to sample and test soils, groundwater and soil vapor, and identify contaminant sources present on the property. The cleanup plan has been designed to address all contaminant sources that have been identified during the study of this property.

Identification of Sensitive Land Uses. Prior to selecting a cleanup, the neighborhood was evaluated to identify sensitive land uses nearby, such as schools, day care facilities, hospitals and residential areas. The cleanup program was then tailored to address the special conditions of this community.

Qualitative Human Health Exposure Assessment. An important part of the cleanup planning for the Site is the performance of a study to find all of the ways that people might come in contact with contaminants at the Site now or in the future. This study is called a Qualitative Human Health Exposure Assessment (QHHEA). A QHHEA was performed for this project. This assessment has considered all known contamination at the Site and evaluated the potential for people to come in contact with this contamination. All identified public exposures will be addressed under this cleanup plan.

Health and Safety Plan. This cleanup plan includes a Health and Safety Plan that is designed to protect community residents and on-Site workers. The elements of this plan are in compliance with safety requirements of the United States Occupational Safety and Health Administration. This plan includes many protective elements including those discussed below.

Site Safety Coordinator. This project has a designated Site safety coordinator to implement the Health and Safety Plan. The safety coordinator maintains an emergency contact sheet and protocol for management of emergencies. The Site safety coordinator is Ezgi Karayel and can be reached at 718-636-0800.

Worker Training. Workers participating in cleanup of contaminated material on this project are required to be trained in a 40-hour hazardous waste operators training course and to take annual refresher training. This pertains to workers performing specific tasks including removing contaminated material and installing cleanup systems in contaminated areas.

Community Air Monitoring Plan. Community air monitoring will be performed during this cleanup project to ensure that the community is properly protected from contaminants, dust and odors. Air samples will be tested in accordance with a detailed plan called the Community Air Monitoring Plan or CAMP. Results will be regularly reported to the NYC Office of Environmental Remediation. This cleanup plan also has a plan to address any unforeseen problems that might occur during the cleanup (called a ‘Contingency Plan’).

Odor, Dust and Noise Control. This cleanup plan includes actions for odor and dust control. These actions are designed to prevent off-Site odor and dust nuisances and includes steps to be taken if nuisances are detected. Generally, dust is managed by application of physical covers and by water sprays. Odors are controlled by limiting the area of open excavations, physical covers, spray foams and by a series of other actions (called operational measures). The project is also required to comply with NYC noise control standards. If you observe problems in these areas, please contact the onsite Project Manager Ezgi Karayel at 718-636-0800 or NYC Office of Environmental Remediation Project Manager Hannah Moore at 212-442-6372.

Quality Assurance. This cleanup plan requires that evidence be provided to illustrate that all cleanup work required under the plan has been completed properly.

This evidence will be summarized in the final report, called the Remedial Action Report. This report will be submitted to the NYC Office of Environmental Remediation and will be thoroughly reviewed.

Storm-Water Management. To limit the potential for soil erosion and discharge, this cleanup plan has provisions for storm-water management. The main elements of the storm water management include physical barriers such as tarp covers and erosion fencing, and a program for frequent inspection.

Hours of Operation. The hours for operation of cleanup will comply with the NYC Department of Buildings construction code requirements or according to specific variances issued by that agency. For this cleanup project, the hours of operation are 7:30 am to 5:00 pm Monday through Friday.

Signage. While the cleanup is in progress, a placard will be prominently posted at the main entrance of the property with a laminated project Fact Sheet that states that the project is in the NYC Voluntary Cleanup Program, provides project contact names and numbers, and locations of project documents can be viewed.

Complaint Management. The contractor performing this cleanup is required to address all complaints. If you have any complaints, you can call the facility Project Manager Ezgi Karayel at 718-636-0800, the NYC Office of Environmental Remediation Project Manager Hannah Moore at 212-442-6372, or call 311 and mention the Site is in the NYC Voluntary Cleanup Program.

Utility Mark-outs. To promote safety during excavation in this cleanup, the contractor is required to first identify all utilities and must perform all excavation and construction work in compliance with NYC Department of Buildings regulations.

Soil and Liquid Disposal. All soil and liquid material removed from the Site as part of the cleanup will be transported and disposed of in accordance with all applicable City, State and Federal regulations and required permits will be obtained.

Soil Chemical Testing and Screening. All excavations will be supervised by a trained and properly qualified environmental professional.

In addition to extensive sampling and chemical testing of soils on the Site, excavated soil will be screened continuously using hand-held instruments, by sight, and by smell to ensure proper material handling and management, and community protection.

Stockpile Management. Soil stockpiles will be kept covered with tarps to prevent dust, odors and erosion. Stockpiles will be frequently inspected. Damaged tarp covers will be promptly replaced. Stockpiles will be protected with silt fences. Hay bales will be used, as needed to protect storm water catch basins and other discharge points.

Trucks and Covers. Loaded trucks leaving the Site will be covered in compliance with applicable laws and regulations to prevent dust and odor. Trucks will be properly recorded in logs and records and placarded in compliance with applicable City, State and Federal laws, including those of the New York State Department of Transportation. If loads contain wet material that can leak, truck liners will be used. All transport of materials will be performed by licensed truckers and in compliance with all laws and regulations.

Imported Material. All fill materials proposed to be brought onto the Site will comply with rules outlined in this cleanup plan and will be inspected and approved by a qualified worker located on-Site. Waste materials will not be brought onto the Site. Trucks entering the Site with imported clean materials will be covered in compliance with applicable laws and regulations.

Equipment Decontamination. All equipment used for cleanup work will be inspected and washed, if needed, before it leaves the Site. Trucks will be cleaned at a truck inspection station on the property before leaving the Site.

Housekeeping. Locations where trucks enter or leave the Site will be inspected every day and cleaned regularly to ensure that they are free of dirt and other materials from the Site.

Truck Routing. Truck routes have been selected to: (a) limit transport through residential areas and past sensitive nearby properties; (b) maximize use of city-mapped truck routes; (c) limit total distance to major highways; (d) promote safety in entry to highways; (e) promote overall safety in trucking; and (f) minimize off-Site line-ups (queuing) of trucks entering the property. Operators of loaded trucks leaving the Site will be instructed not to stop or idle in the local neighborhood.

Final Report. The results of all cleanup work will be fully documented in a final report (called a Remedial Action Report) that will be available for you to review in the document repositories located at the closest New York Public Library or online at <http://www.nyc.gov/html/oer/html/repository/RBrooklyn.shtml>.

Long-Term Site Management. To provide long-term protection after the cleanup is complete, the property owner will be required to comply with an ongoing Site Management Plan that calls for continued inspection of protective controls, such as Site covers. The Site Management Plan is evaluated and approved by the NYC Office of Environmental Remediation. Requirements that the property owner must comply with are defined in the property's deed. A certification of continued protectiveness of the cleanup will be required from time to time to show that the approved cleanup is still effective.

REMEDIAL ACTION WORK PLAN

1.0 SITE BACKGROUND

114 North Sixty Realty Corp. has enrolled in the New York City Voluntary Cleanup Program (NYC VCP) to investigate and remediate a property located at 126 North 6th Street in Williamsburg, Brooklyn, New York (the Site). A Remedial Investigation (RI) was performed to compile and evaluate data and information necessary to develop this Remedial Action Work Plan (RAWP) in a manner that will render the Site protective of public health and the environment consistent with the contemplated end use. This RAWP establishes remedial action objectives, provides remedial alternatives analysis that includes consideration of a permanent cleanup, and provides a description of the selected remedial action. The remedial action described in this document provides for the protection of public health and the environment, complies with applicable environmental standards, criteria and guidance and applicable laws and regulations.

1.1 SITE LOCATION AND CURRENT USAGE

The Site is located at 126 North 6th Street in the Williamsburg section in Brooklyn, New York and is identified as Block 2335 and Lot 6 on the New York City Tax Map. Figure 1 shows the Site location. The Site is 2,500-square feet and is bounded by North 6th Street to the north, multi-story residential building to the south, 1-story commercial building to the east, and 1-story commercial building to the west. A map of the site boundary is shown in Figure 2. Currently, the Site is vacant.

1.2 PROPOSED REDEVELOPMENT PLAN

The proposed future use of the Site will consist of 1-story commercial and residential mixed use building with a full basement. The basement slab will be 8 feet below grade; anticipated excavation depths will approach 9 feet below grade. The basement will be used for retail space and storage. No open space is proposed.

Layout of the proposed site development is presented in Figure 3. The current zoning designation is M1-2/R6A. The proposed use is consistent with existing zoning for the property.

The remedial action contemplated under this RAWP may be implemented independently of the proposed redevelopment plan.

1.3 DESCRIPTION OF SURROUNDING PROPERTY

The Site is located in a commercial and residential neighborhood. There are no surface bodies or regulated wetlands on or adjacent to the Site.

North 6th Street is located to the north of the Site. 1-story commercial buildings are located to the east and to the west of the Site. One multi-story residential building is located to the south of the Site.

Within 500 foot radius of the Site, there is a variety of land uses including: commercial, residential (multi-story residential apartments) and mixed residential-commercial use. Properties located within ¼ mile radius of the Site are zoned M1-2/R6A and M1-2/R6B (mixed use district). Figure 2 shows the surrounding land usage.

Sensitive Receptors

Within 500 foot radius of the Site, no sensitive receptors have been identified.

1.4 REMEDIAL INVESTIGATION

A remedial investigation was performed and the results are documented in a companion document called “*Remedial Investigation Report, 126 North 6th Street*”, dated January 2012 (RIR).

Summary of Past Uses of Site and Areas of Concern

Based upon the review of the Fire Insurance Maps, a Site history was established. The Site was historically developed as three 3-story residential buildings prior to 1887. The residential buildings were demolished prior to 1942. The site was undeveloped and utilized as a yard for the adjacent meat store and cold storage business from approximately 1948 to 1970. The property has been vacant since 1970.

Based upon the results of the Remedial Investigation the AOCs identified for this site include:

1. Historic Fill

Summary of the Work Performed under the Remedial Investigation

114 Sixth Realty Corp. performed the following scope of work:

1. Conducted a Site inspection to identify AOCs and physical obstructions (i.e. structures, buildings, etc.);
2. Conducted a Ground Penetrating Radar (GPR) survey;
3. Installed three (3) soil borings across the entire project Site, and collected six (6) soil samples for chemical analysis from the soil borings to evaluate soil quality;
4. Installed three (3) groundwater monitoring wells throughout the Site to establish groundwater flow and collected three (3) groundwater samples for chemical analysis to evaluate groundwater quality;
5. Installed three (3) soil vapor probes around Site perimeter and collected three (3) samples for chemical analysis;
6. Prepared RIR based upon all investigation results.

Summary of Environmental Findings

1. Elevation of the property is 26 feet.
2. Depth to groundwater ranges from 24 to 25 feet at the Site.
3. Groundwater flow is generally from west to east beneath the Site.
4. Bedrock was not encountered during the investigation.
5. The stratigraphy of the site, from the surface down, consists of 2-6 feet of brown sand, trace gravel, trace silt and historical fill underlain by brown, fine sand, little gravel silt.
6. Soil/fill samples collected during the RI showed no detectable Pesticides or PCBs. No VOCs were detected except for methylene chloride which was below its NYSDEC Part 375 Unrestricted Use (Track 1) Soil Cleanup Objective (UUSCO).
7. Methylene chloride was found in all samples at virtually identical concentrations and is a suspected laboratory contaminant.

Several Polycyclic Aromatic Hydrocarbon (PAH) SVOCs were identified above their Track 1 UUSCOs in 2 of 3 shallow soil samples; one PAH, benzo(a)pyrene, was also identified above its Track 2 Restricted Commercial SCO (RCSCO) in one shallow soil sample at SP-2. Several metals were identified above their respective Track 1 UUSCOs, and, of these, barium and lead also exceed their Track 2 RCSCOs in shallow soil. The shallow soil sample collected at SP-2 showed high concentrations of lead (15,800 ppm) which will require remedial management. With the exception of this lead hotspot, the levels of PAHs and metals are consistent with observations of historic fill. Overall, soil chemistry is not remarkable and no contaminant source areas were identified with the exception of one lead hotspot area. Lead did not exceed its groundwater quality standard (GQS), indicating that this hotspot is not contributing to groundwater contamination.

8. Groundwater samples collected during this RI showed no detectable SVOCs, pesticides, or PCBs. No VOCs were detected above GQSs except for methylene chloride which was found in all samples, including the laboratory blank. While naphthalene and chloroform were identified at low levels below GQS in groundwater, neither were detected in on-site soils. No dissolved metals were identified above GQSs except for manganese, sodium, and selenium. Metals findings indicate that there is likely saline intrusion in local groundwater, and that on-site metals are not mobilizing into groundwater. Overall, groundwater chemistry is not remarkable, and no contaminant source areas were identified on the property.
9. Soil vapor samples collected during the RI showed numerous VOCs detected. A variety of petroleum compounds were identified at generally low to moderate concentrations. Chlorinated hydrocarbons in the form of TCE are elevated with maximum concentrations above 200 ug/m³ and above the monitor and action level established in the NYSDOH Final Guidance on Soil Vapor Intrusion (October 2006) Decision Matrices. These concentrations will require mitigation in the remedial action phase. Chlorinated hydrocarbons including TCE were not detected in soil or groundwater onsite and no source area is evident within the property boundary. Past use of the property does not support an onsite source.

For more detailed results, consult the RIR. Based on an evaluation of the data and information from the RIR and this RAWP, disposal of significant amounts of hazardous waste is not suspected at this site.

2.0 REMEDIAL ACTION OBJECTIVES

Based on the results of the RI, the following Remedial Action Objectives (RAOs) have been identified for this Site:

Soil

- Prevent direct contact with contaminated soil.

Soil Vapor

- Prevent exposure to contaminants in soil vapor.
- Prevent migration of soil vapor into dwelling and other occupied structures.

Groundwater

- Remove contaminant sources which could cause impact to groundwater.

3.0 REMEDIAL ALTERNATIVES ANALYSIS

The following two remedial action alternatives, one achieving Track 1 SCOs (Alternative 1) and one achieving Track 4 SCOs (Alternative 2), are considered in this analysis:

- Alternative 1 involves
 - Achievement of Track 1 Unrestricted Use SCOs. Removal of soils exceeding Track 1 SCOs throughout the site and confirmation with post-excavation endpoint sampling.
 - No engineering or institutional controls can be utilized in a Track 1 cleanup.
- Alternative 2 involves
 - Achievement of Track 4 SCOs and removal of soils exceeding Track 4 SCOs;
 - Placement of a soil vapor barrier beneath the building slab and along foundation side walls and an active sub-slab depressurization system beneath the foundation due to the presence of off-site impacts to soil vapor;
 - Placement of a final cover over the entire site to eliminate exposure to remaining soil/fill;
 - Establishment of use restrictions including prohibitions on the use of groundwater from the site and prohibitions on other sensitive site uses, such as farming or vegetable gardening, to eliminate future exposure pathways;
 - Establishment of an approved Site Management Plan (SMP) to ensure long-term management of these engineering and institutional controls, including the performance of periodic inspections and certification that the controls are performing as they were intended; and
 - Placement of a deed restriction to memorialize the remedial action and the Engineering and Institutional Controls to ensure that future owners of the site continue to maintain these controls as required.

3.1 THRESHOLD CRITERIA

Protection of Public Health and the Environment

This criterion is an evaluation of the remedy's ability to protect public health and the environment, and an assessment of how risks posed through each existing or potential pathway of exposure are eliminated, reduced or controlled through removal, treatment, and implementation of Engineering Controls or Institutional Controls. Protection of public health and the environment must be achieved for all approved remedial actions.

Alternative 1 would prevent exposure to contaminated on-site soils during remediation/construction by implementing an approved soil and materials management plan and CAMP. By removing all soil/ fill with contaminant concentrations above Track 1 SCOs, the potential for direct contact with contaminated soil/ fill would be eliminated after remediation/ construction is complete. However, in order to prevent the migration of soil vapor from offsite sources into the proposed building and to prevent associated inhalation exposures, institutional and engineering controls are needed. A Track 1 Remedy cannot employ institutional or engineering controls. Therefore even though Alternative 1 would provide the maximum protection of public health and the environment based on onsite contamination, Alternative 1 would not adequately meet the RAOs of preventing exposure to contaminants in soil vapor from offsite sources and preventing migration of soil vapor into occupied structures without engineering and institutional controls that can be monitored in the long-term.

Alternative 2 would achieve protection of human health and the environment by removing soil/fill with contaminant concentrations above Track 4 SCOs as well as placement of institutional and engineering controls, including a composite cover system, a vapor barrier, and an active SSDS. As such, this alternative would be consistent with the RAOs and would provide overall protection of public health and the environment in consideration of current and potential future land use by

- Minimizing the potential for direct contact with contaminated on-site soils by implementing an approved soil and materials management plan and CAMP during remediation and by establishing a composite cover system over the entire site once construction is complete; and

- Preventing the potential for migration of soil vapor into occupied structures and associated inhalation exposures by installing a vapor barrier and active SSDS, in conjunction with the composite cover system.

3.2. BALANCING CRITERIA

Compliance with Standards, Criteria and Guidance (SCGs)

Alternative 1 would address the chemical-specific SCGs for soil by establishment of Track 1 SCOs and attainment of these standards for onsite soil. Attainment of soil vapor SCGs would not be possible without engineering controls. Focused attention on means and methods employed during the remedial action would ensure that handling and management of contaminated material would be in compliance with applicable SCGs.

Alternative 2 would address the chemical-specific SCGs for soil, groundwater, and soil vapor by establishment of Track 4 SCOs and removal of soils exceeding these SCOs, and installation of engineering controls to mitigate against soil vapor intrusion. Similar to the Track 1 alternative, focused attention on means and methods employed during the remedial action would ensure that handling and management of contaminated material would be in compliance with applicable SCGs.

Short-term effectiveness and impacts

This evaluation criterion assesses the effects of the alternative during the construction and implementation phase until remedial action objectives are met. Under this criterion, alternatives are evaluated with respect to their effects on public health and the environment during implementation of the remedial action, including protection of the community, environmental impacts, time until remedial response objectives are achieved, and protection of workers during remedial actions.

Both Alternative 1 and 2 would result in short-term impacts associated with excavation, handling, load out of materials, and truck traffic. However, focused attention to means and methods during the remedial action during the removal action, including community air monitoring and appropriate truck routing, would minimize or negate the overall impact of these activities.

Long-term effectiveness and permanence

This evaluation criterion addresses the results of a remedial action in terms of its permanence and quantity/nature of waste or residual contamination remaining at the Site after response objectives have been met, such as permanence of the remedial alternative, magnitude of remaining contamination, adequacy of controls including the adequacy and suitability of ECs/ICs that may be used to manage contaminant residuals that remain at the Site and assessment of containment systems and ICs that are designed to eliminate exposures to contaminants, and long-term reliability of Engineering Controls.

Alternative 1 would achieve long-term effectiveness and permanence related to on-site contamination by permanently removing all impacted soils. However, without engineering and institutional controls, alternative 1 would not prevent exposure to off-site soil vapor contamination.

Alternative 2 would provide long-term effectiveness by removing most on-site contamination and attaining Track 4 SCOs, placing a concrete slab under the building, establishing use restrictions, establishing a Site Management Plan to ensure long-term management of Institutional and Engineering Controls, and placing a deed restriction to memorialize these controls for the long term. Groundwater use restrictions will eliminate potential exposure to groundwater and establishment of an SMP and a deed restriction will ensure that this protection remains effective for the long-term. The SMP will ensure long-term effectiveness of all Engineering and Institutional Controls by requiring periodic inspection and certification that these controls and use restrictions continue to be in place and functioning as they were intended assuring that protections designed into the remedy will provide continued high level of protection in perpetuity.

Reduction of toxicity, mobility, or volume of contaminated material

This evaluation criterion assesses the remedial alternative's use of remedial technologies that permanently and significantly reduce toxicity, mobility, or volume of contaminants as their principal element. The following is the hierarchy of source removal and control measures that are to be used to remediate a Site, ranked from most preferable to least preferable: removal and/or treatment, containment, elimination of exposure and treatment of source at the point of

exposure. It is preferred to use treatment or removal to eliminate contaminants at a Site, reduce the total mass of toxic contaminants, cause irreversible reduction in contaminants mobility, or reduce of total volume of contaminated media.

Alternative 1 would permanently eliminate the toxicity, mobility, and volume of contaminants from on-site soil by removing all soil in excess of unrestricted use SCOs. Removal of soil to a depth of approximately 9 feet would occur.

Alternative 2 would permanently eliminate the toxicity, mobility, and volume of contaminants from on-site soil in the area of the proposed hot spot removal, and remaining soil/fill would meet Track 4 site specific SCOs. Alternative 1 would eliminate a greater total mass of contaminants on site.

Implementability

This evaluation criterion addresses the technical and administrative feasibility of implementing an alternative and the availability of various services and materials required during its implementation, including technical feasibility of construction and operation, reliability of the selected technology, ease of undertaking remedial action, monitoring considerations, administrative feasibility (e.g. obtaining permits for remedial activities), and availability of services and materials.

Both Alternatives are feasible and implementable. They use standard materials, services, and well-established technology. The reliability of these remedies is also high. There are no specific difficulties associated with any of the activities proposed, which utilize standard industry methods.

Cost effectiveness

This evaluation criterion addresses the cost of alternatives, including capital costs (such as construction costs, equipment costs, and disposal costs, engineering expenses) and site management costs (costs incurred after remedial construction is complete) necessary to ensure the continued effectiveness of a remedial action.

The capital costs associated with the Track 1 alternative are higher than the Track 2 alternative in that a higher volume of soil/fill will be excavated for off-site disposal to achieve a

Track 1 status over the entire site. The Track 2 alternative has higher operational costs due to operation of a fan for the active SSDS.

Community Acceptance

This evaluation criterion addresses community opinion and support for the remedial action. Observations here will be supplemented by public comment received on the RAWP.

Based on the overall goals of the remedial program and initial observations by the project team, both of the alternatives are acceptable to the community. This RAWP will be undergo public review under the NYC VCP and will provide the opportunity for detailed public input on the remedial alternatives and the selected remedial action. This public comment will be considered by OER prior to approval of this plan.

Land use

This evaluation criterion addresses the proposed use of the property. This evaluation has considered reasonably anticipated future uses of the Site and takes into account: current use and historical and/or recent development patterns; applicable zoning laws and maps; NYS Department of State's Brownfield Opportunity Areas (BOA) pursuant to section 970-r of the general municipal law; applicable land use plans; proximity to real property currently used for residential use, and to commercial, industrial, agricultural, and/or recreational areas; environmental justice impacts, Federal or State land use designations; population growth patterns and projections; accessibility to existing infrastructure; proximity of the site to important cultural resources and natural resources, potential vulnerability of groundwater to contamination that might emanate from the site, proximity to flood plains, geography and geology; and current Institutional Controls applicable to the site.

Because of the complete soil removal proposed for the Track 1 alternative, it provides protection of public health and the environment for both the proposed use of the Site and any future use. Track 1 does not allow engineering controls that would provide protection against off site vapor migration. The Track 1 alternative provides a remedial action that is beneficial to the surrounding community and is consistent with the goals of the City for remediating and redeveloping brownfield sites.

The Track 4 alternative also provides sufficient environmental and public health protection for the intended use. This alternative would allow the use of engineering controls and institutional controls that would provide protections against of site vapor migration.

Both alternatives for remedial action at the site are comparable with respect to the proposed use and to land uses in the vicinity of the Site. The proposed use is consistent with the existing zoning designation for the property and is consistent with recent development patterns. The Site is surrounded by commercial and residential properties and both alternatives provide comprehensive protection of public health and the environment for these uses. Improvements in the current brownfield condition of the property achieved by both alternatives are also consistent with the City's goals for cleanup of contaminated land and bringing such properties into productive reuse. Both alternatives are equally protective of natural resources and cultural resources. This RAWP will be subject to public review under the NYC VCP and will provide the opportunity for detailed public input on the land use factors described in this section. This public comment will be considered by OER prior to approval of this plan.

Sustainability of the Remedial Action

This criterion evaluates the overall sustainability of the remedial action alternatives and the degree to which sustainable means are employed to implement the remedial action including those that take into consideration NYC's sustainability goals defined in *PlaNYC: A Greener, Greater New York*. Sustainability goals may include: maximizing the recycling and reuse of non-virgin materials; reducing the consumption of virgin and non-renewable resources; minimizing energy consumption and greenhouse gas emissions; improving energy efficiency; and promotion of the use of native vegetation and enhancing biodiversity during landscaping associated with Site development.

While alternative 2 would result in lower energy use based on reducing the volume of material transported off-site, both remedial alternatives are comparable with respect to the opportunity to achieve sustainable remedial action.

4.0 REMEDIAL ACTION

4.1 SUMMARY OF PREFERRED REMEDIAL ACTION

The preferred remedial alternative is the Track 4 Alternative. It is expected that development based excavation to a depth of 9 feet may enable attainment of Track 1 SCOs in soils remaining on the property. This alternative also allows for the use of engineering and institutional controls to provide for mitigation against soil vapors from offsite. The preferred remedy achieves protection of public health and the environment for the intended use of the property. The preferred remedial action alternative will achieve all of the remedial action objectives established for the project and addresses applicable SCGs. The preferred remedial action alternative is effective in both the short-term and long-term and reduces mobility, toxicity and volume of contaminants. The preferred remedial action alternative is cost effective and implementable and uses standards methods that are well established in the industry.

The proposed remedial action will consist of:

1. Preparation of a Community Protection Statement and implementation of a Citizen Participation Plan.
2. Performance of a Community Air Monitoring Program for particulates and volatile organic carbon compounds.
3. Establishment of Track 4 Soil Cleanup Objectives (SCOs). End-point samples will also be compared to Track 1 SCOs to determine which level of remediation is achieved.
4. Site mobilization involving Site security setup, equipment mobilization, utility mark outs and marking & staking excavation areas.
5. Implementation of storm-water pollution prevention measures in compliance with applicable laws and regulations.
6. Excavation and removal of soil/fill exceeding Track 4 SCOs.
7. Screening of excavated soil/fill during intrusive work for indications of contamination by visual means, odor, and monitoring with a PID.

8. Removal of underground storage tanks and closure of petroleum spills (if encountered) in compliance with applicable local, State and Federal laws and regulations.
9. Transportation and off-Site disposal of all soil/fill material at permitted facilities in accordance with applicable laws and regulations for handling, transport, and disposal, and this plan. Sampling and analysis of excavated media as required by disposal facilities. Appropriate segregation of excavated media onsite.
10. Collection and analysis of end-point samples to determine the performance of the remedy with respect to attainment of SCOs.
11. Demarcation of residual soil/fill.
12. Import of materials to be used for backfill and cover in compliance with this plan and in accordance with applicable laws and regulations.
13. Construction and maintenance of an engineered composite cover consisting of a building slab covering the entire site to prevent human exposure to residual soil/fill remaining under the Site.
14. Installation of a vapor barrier system beneath the foundation and sidewalls.
15. Installation and operation of an active sub-slab depressurization system.
16. Performance of all activities required for the remedial action, including permitting requirements and pretreatment requirements, in compliance with applicable laws and regulations.
17. Submission of a RAR that describes the remedial activities, certifies that the remedial requirements have been achieved, defines the Site boundaries, and describes all Engineering and Institutional Controls to be implemented at the Site, and lists any changes from this RAWP.
18. Submission of an approved Site Management Plan (SMP) in the RAR for long-term management of residual contamination, including plans for operation, maintenance,

monitoring, inspection and certification of Engineering and Institutional Controls and reporting at a specified frequency.

19. Recording of a Declaration of Covenants and Restrictions that includes a listing of Engineering Controls and a requirement that management of these controls must be in compliance with an approved SMP; and Institutional Controls including prohibition of the following: (1) vegetable gardening and farming; (2) use of groundwater without treatment rendering it safe for the intended use; (3) disturbance of residual contaminated material unless it is conducted in accordance with the SMP; and (4) higher level of land usage without OER-approval.

Remedial activities will be performed at the Site in accordance with this OER-approved RAWP. All deviations from the RAWP will be promptly reported to OER, and changes will also be documented in the RAR.

4.2 SOIL CLEANUP OBJECTIVES AND SOIL/FILL MANAGEMENT

Track 4 cleanup standards are proposed for this project. The Track 4 Soil Cleanup Objectives for the Site are:

<u>Contaminant</u>	<u>Track 4 SCOs</u>
Total SVOCs	250 ppm
Barium	750 ppm
Copper	270 ppm (Track 2 Restricted Commercial SCO)
Lead	1000 ppm (Track 2 Restricted Commercial SCO)
Zinc	2200 ppm (Track 2 Restricted Residential SCO)

Soil and materials management on-Site and off-Site will be conducted in accordance with the soil management plan as described below.

All primary contaminant sources (such as hotspots) identified during the remedial action will be identified by GPS or surveyed by a surveyor licensed to practice in the State of New York. This information will be provided on maps in the Remedial Action Report.

Estimated Soil/Fill Removal Quantities

The total quantity of soil and fill expected to be disposed off-Site is approximately 830 cubic yards. Disposal facilities will be reported to OER when they are identified and prior to the start of remedial action.

End-Point Sampling

Remedial actions under this plan will be performed in conjunction with remedial performance end-point sampling. Sampling and testing will be performed promptly following materials removal and completed prior to Site development activities.

End-point sampling will consist of the following:

1. To evaluate attainment of Track 4 SCOs throughout the site, three base samples will be collected. Each sample will be analyzed for
SVOCs (USEPA Method 8260, PAH only) and
TAL Metals (USEPA Methods 6010 and 7471).
2. Hotspot removal actions under this plan will be performed in conjunction with remedial end-point sampling.
 - a. End-point sampling frequency for hotspots will consist of the following:
 - i. For excavations less than 20 feet in total perimeter, at least one bottom sample and one sidewall sample biased in the direction of surface runoff.
 - ii. For excavations 20 to 300 feet in perimeter:
 1. For surface removals, one sample from the top of each sidewall for every 30 linear feet of sidewall and one sample from the excavation bottom for every 900 square feet of bottom area.
 2. For subsurface removals, one sample from each sidewall for every 30 linear feet of sidewall and one sample from the excavation bottom for every 900 square feet of bottom area.

- b. For endpoint samples taken following removal of the lead hotspot identified during the remedial investigation, endpoint samples will be analyzed for lead and barium using USEPA method 6010.
- c. For any additional hotspots encountered during the remedial action, endpoint samples will be analyzed for applicable constituents of concern using the following analyses, as determined in consultation with OER:

VOCs by EPA Method 8260;

SVOCs by EPA Method 8270;

TAL metals, and

Pesticides/PCBs by Method 8081/8082.

- 3. For sampling of volatile organics, bottom samples should be taken within 24 hours of excavation, and will be taken from the zero to six-inch interval at the excavation floor. Samples taken after 24 hours will be taken at six to twelve inches.
- 4. For contaminated soil removal, post remediation soil samples for laboratory analysis will be taken immediately after contaminated soil removal. If the excavation is enlarged horizontally, additional soil samples will be taken pursuant to bullets 2 and 3 above.

Post-remediation sample locations and depths will be biased towards the areas and depths of highest contamination identified during previous sampling episodes unless field indicators such as field instrument measurements or visual contamination identified during the remedial action indicate that other locations and depths may be more heavily contaminated. In all cases, post-remediation samples should be biased toward locations and depths of the highest expected contamination.

New York State ELAP certified labs will be used for all end-point sample analyses. Labs for end-point sample analyses will be reported in the RAR. The RAR will provide a tabular and map summary of all end-point sample results and will include all data including non-detects and applicable standards and/or guidance values.

End-point samples will be analyzed for trigger analytes (those for which SCO exceedance is identified) utilizing the methodology identified above.

If either LNAPL and/or DNAPL are detected, appropriate samples will be collected for characterization and “finger print analysis” and required regulatory reporting (i.e. spills hotline) will be performed.

Quality Assurance/Quality Control

Endpoint soil samples will be containerized in laboratory-prepared jars, labeled, sealed, and placed in a chilled cooler for shipment to the laboratory. Chain of Custody procedures outlined in the RIWP will followed. Soil samples were analyzed by an ELAP-certified laboratory approved by the NYSDOH. For every 20 soil samples, one duplicate soil sample will also be collected and analyzed for all parameters.

Import and Reuse of Soils

Import of soils onto the property and reuse of soils already onsite is not anticipated. In the event that import and/or reuse of soils is necessary, import and/or reuse will be performed in conformance with the Soil/Materials Management Plan in Appendix 3.

4.3 ENGINEERING CONTROLS

Engineering Controls are employed in the remedial action to address residual materials remaining after the remedial action. These Engineering Controls include a composite cover system, a vapor barrier, and an active sub-slab depressurization system.

Composite Cover System

Exposure to residual soil/fill will be prevented by an engineered, composite cover system to be built on the Site. The entire property will be covered by an engineered permanent cover system. This cover system will be comprised of a 4 inch concrete-building slab beneath the entire property.

Vapor Barrier

In order to prevent subsurface vapors from impacting the interior air of the buildings at the Site a vapor barrier system (VBS) consisting of a 30-mil geomembrane liner will be installed beneath the cellar foundation and sidewalls.

The VBS will be installed under the direct oversight of a Hydro Tech Environmental (Hydro Tech) Engineer. Following completion of all site construction, Hydro Tech will document the installation of the VBS in the Closure Report.

Sub-slab depressurization

Migration of soil vapor will be mitigated with the construction of an active sub-slab depressurization system (SSDS). The SSDS will be installed under the direct oversight of a Hydro Tech Engineer. Following completion of all site construction, Hydro Tech will document the installation of the SSDS in the Closure Report.

4.4 INSTITUTIONAL CONTROLS

Institutional Controls (IC) have been incorporated in this remedial action to render the site protective of public health and the environment by managing residual soil/fill where Track 1 SCOs are not achieved and managing potential soil vapor intrusion from off-site sources. Institutional Controls are listed below. Long-term employment of EC/ICs will be established in a Declaration of Covenant and Restrictions (DCR) assigned to the property by the title holder and will be implemented under a site-specific Site Management Plan (SMP) that will be included in the RAR.

Institutional Controls for this remedial action are:

- Recording of an OER-approved Declaration of Covenant and Restrictions (DCR) with the City Register or county clerk, as appropriate. The DCR will include a description of all ECs and ICs, will summarize the requirements of the Site Management Plan, and will note that the property owner and property owner's successors and assigns must comply with the DCR and the approved SMP. The recorded DCR will be submitted in the Remedial Action Report. The DCR will be recorded prior to OER issuance of the Notice of Completion;

- Submittal of a Site Management Plan in the RAR for approval by OER that provides procedures for appropriate operation, maintenance, monitoring, inspection, reporting and certification of ECs. SMP will require that the property owner and property owner's successors and assigns will submit to OER a periodic written statement that certifies that: (1) controls employed at the Site are unchanged from the previous certification or that any changes to the controls were approved by OER; and, (2) nothing has occurred that impairs the ability of the controls to protect public health and environment or that constitute a violation or failure to comply with the SMP. OER retains the right to enter the Site in order to evaluate the continued maintenance of any controls. This certification shall be submitted annually and will comply with RCNY §43-1407(1)(3).
- Vegetable gardens and farming on the Site are prohibited;
- Use of groundwater underlying the Site is prohibited without treatment rendering it safe for its intended use;
- All future activities on the Site that will disturb residual material must be conducted pursuant to the soil management provisions in an approved SMP (if Track 1 is not achieved);
- The Site will be used for restricted commercial or restricted residential use and will not be used for a higher level of use without prior approval by OER.

4.5 SITE MANAGEMENT PLAN

A Site Management Plan (SMP) is proposed under this Remedial Action. Site Management is the last phase of remediation and begins with the approval of the Remedial Action Report and issuance of the Notice of Completion (NOC) for the Remedial Action. The Site Management Plan (SMP) describes appropriate methods and procedures to ensure implementation of all ECs and ICs that are required by the DCR and this RAWP. The Site Management Plan is submitted as part of the RAR but will be written in a manner that allows its use as an independent document. Site Management continues until terminated in writing by OER. The property owner is responsible to ensure that all Site Management responsibilities defined in the DCR and the Site Management Plan are implemented.

The SMP will provide a detailed description of the procedures required to manage residual soil/fill left in place following completion of the remedial action in accordance with the Voluntary Cleanup Agreement with OER. This includes a plan for: (1) implementation of EC's and ICs; (2) implementation of monitoring programs; (3) operation and maintenance of EC's; (4) inspection and certification of EC's; and (5) reporting.

Site management activities, reporting, and EC/IC certification will be scheduled on a periodic basis to be established in the SMP and will be subject to review and modification by OER.

4.6 QUALITATIVE HUMAN HEALTH EXPOSURE ASSESSMENT

Investigations reported in the Remedial Investigation Report (RIR) are sufficient to complete a Qualitative Human Health Exposure Assessment (QHHEA). As part of the VCP process, a QHHEA was performed to determine whether the Site poses an existing or future health hazard to the Site's exposed or potentially exposed population. The sampling data from the RI were evaluated to determine whether there is any health risk by characterizing the exposure setting, identifying exposure pathways, and evaluating contaminant fate and transport. This EA was prepared in accordance with Appendix 3B and Section 3.3 (b) 8 of the NYSDEC Draft DER-10 Technical Guidance for Site Investigation and Remediation.

Known and Potential Sources

Based on the results of the RIR, the contaminants of concern are:

Soil:

- Metals, including lead and barium, exceeding Track 2 Restricted Residential SCOs;
- The PAH SVOC benzo(a)pyrene exceeding its Track 2 Restricted Residential SCO;

Soil Vapor:

- VOCs detected at low to moderate concentrations, including TCE and PCE.

Nature, Extent, Fate and Transport of Contaminants

Soil: Metals and SVOCs are present throughout the site in shallow soil.

Groundwater: Metals of concern were not found in dissolved groundwater samples above GQS, indicating that the property is not contributing to groundwater standard violation. Some saline minor metals were identified in groundwater and are believed to be associated with regional groundwater impacts.

Soil Vapor: TCE and PCE were found in 2 of 3 soil vapor sampling locations, but neither TCE nor PCE were found in soil or groundwater above their respective UUSCOs in soil, or above groundwater protection standards. It is suspected that these compounds are derived from an offsite source.

Potential Routes of Exposure

The five elements of an exposure pathway are: (1) a contaminant source; (2) contaminant release and transport mechanisms; (3) a point of exposure; (4) a route of exposure; and (5) a receptor population. An exposure pathway is considered complete when all five elements of an exposure pathway are documented. A potential exposure pathway exists when any one or more of the five elements comprising an exposure pathway cannot be documented. An exposure pathway may be eliminated from further evaluation when any one of the five elements comprising an exposure pathway has not existed in the past, does not exist in the present, and will never exist in the future. Three potential primary routes exist by which chemicals can enter the body:

- Ingestion of water, fill, or soil;
- Inhalation of vapors and particulates; and
- Dermal contact with water, fill, soil, or building materials.

Existence of Human Health Exposure

Current Conditions: Potential exposure pathways include ingestion and dermal contact with soil/fill. There is no potential for contaminated soil vapors to accumulate, as there are no structures currently on site. Direct exposures are currently controlled by the use of a construction security fence.

Construction/ Remediation Activities: The potential exposure pathways to onsite contamination are by ingestion, dermal, or inhalation exposure by onsite workers during the remedial action. During the remedial action, on-site exposure pathways will be eliminated by preventing access to the site, through implementation of soil/ materials management, stormwater pollution prevention, and dust controls, employment of a community air monitoring plan, and implementation of a Construction Health and Safety Plan.

Proposed Future Conditions: Under future remediated conditions, most or all soils in excess of Track 1 SCOs will be removed and the site will meet, at minimum, Track 4 SCOs, the site will be fully capped, limiting potential direct exposure to soil and groundwater remaining in place, and engineering controls including a vapor barrier and sub-slab depressurization system will prevent potential for inhalation via soil vapor intrusion. The site is served by a public water supply and groundwater is not used at the site. There are no plausible off-site pathways for ingestion, inhalation, or dermal exposure to contaminants derived from the site.

Receptor Populations

On-Site Receptors: The site is currently vacant. Therefore the only potential human receptors are potential trespassers. During construction, onsite receptors will include construction worker and visitors. After construction, onsite receptors will include child and adult residents and occupants of the site, employees and commercial customers.

Off-Site Receptors: Potential off-site receptors within a 0.25-mile radius of the Site include: adult and child residents, and commercial and construction workers, pedestrians, trespassers, and cyclists, based on the following:

1. Commercial Businesses – existing and future
2. Residential Buildings – existing and future
3. Building Construction/Renovation – existing and future
4. Pedestrians, Trespassers, Cyclists– existing and future
5. Schools– existing and future

Overall Human Health Exposure Assessment

Complete on-site exposure pathways appear to be present only during the current unremediated phase and the construction and remediation phase. Under current conditions, on-site exposure pathways are limited by preventing access to the site. During the remedial action, on-site exposure pathways will be limited by preventing access to the site, through implementation of soil/materials management, stormwater pollution prevention, and dust controls, employment of a community air monitoring plan, and implementation of a Construction Health and Safety Plan.

After the remedial action is complete, there will be no remaining exposure pathways. The vapor barrier, SSDS and the composite cover and long-term site management will interrupt any remaining exposure pathways. Continued protection after the remedial action will be achieved by the implementation of site management including periodic inspection and certification of the performance of remedial controls.

5.0 REMEDIAL ACTION MANAGEMENT

5.1 PROJECT ORGANIZATION AND OVERSIGHT

Principal personnel who will participate in the remedial action include Ezgi Karayel (project manager) and Rachel Ataman, Vice President. The Professional Engineer (PE) for this project is Shaik Saad, and the Qualified Environmental Professionals (QEP) for this project is Mark E. Robbins.

5.2 SITE SECURITY

Site access will be controlled by gated entrances to the fenced property. Barriers will be installed around work areas as needed to delineate and restrict access to the work area. For work areas of limited size, barrier tape will be sufficient to delineate and restrict access. For larger worker areas, temporary fencing will be provided.

5.3 WORK HOURS

The approximate hours for operation of remedial construction will be from 7:30 am to 5:00 pm. These hours conform to the New York City Department of Buildings construction code requirements.

5.4 CONSTRUCTION HEALTH AND SAFETY PLAN

The Construction Health and Safety Plan will be included in the Stipulation List. The Site Safety Coordinator will be Ezgi Karayel. Remedial work performed under this RAWP will be in full compliance with applicable health and safety laws and regulations, including Site and OSHA worker safety requirements and HAZWOPER requirements. Confined space entry, if any, will comply with OSHA requirements and industry standards and will address potential risks. The parties performing the remedial construction work will ensure that performance of work is in compliance with the HASP and applicable laws and regulations. The HASP pertains to remedial and invasive work performed at the Site until the issuance of the Notice of Completion.

All field personnel involved in remedial activities will participate in training required under 29 CFR 1910.120, including 40-hour hazardous waste operator training and annual 8-hour

refresher training. Site Safety Officer will be responsible for maintaining workers training records.

Personnel entering any exclusion zone will be trained in the provisions of the HASP and be required to sign an HASP acknowledgment. Site-specific training will be provided to field personnel. Additional safety training may be added depending on the tasks performed. Emergency telephone numbers will be posted at the site location before any remedial work begins. A safety meeting will be conducted before each shift begins. Topics to be discussed include task hazards and protective measures (physical, chemical, environmental); emergency procedures; PPE levels and other relevant safety topics. Meetings will be documented in a log book or specific form.

An emergency contact sheet with names and phone numbers is included in the HASP. That document will define the specific project contacts for use in case of emergency.

5.5 COMMUNITY AIR MONITORING PLAN

Real-time air monitoring for volatile organic compounds (VOCs) and particulate levels at the perimeter of the exclusion zone or work area will be performed. Continuous monitoring will be performed for all ground intrusive activities and during the handling of contaminated or potentially contaminated media. Ground intrusive activities include, but are not limited to, soil/waste excavation and handling, test pit excavation or trenching, and the installation of soil borings or monitoring wells.

Periodic monitoring for VOCs will be performed during non-intrusive activities such as the collection of soil and sediment samples or the collection of groundwater samples from existing monitoring wells. Periodic monitoring during sample collection, for instance, will consist of taking a reading upon arrival at a sample location, monitoring while opening a well cap or overturning soil, monitoring during well baling/purging, and taking a reading prior to leaving a sample location. Depending upon the proximity of potentially exposed individuals, continuous monitoring may be performed during sampling activities. Examples of such situations include groundwater sampling at wells on the curb of a busy urban street, in the midst of a public park, or adjacent to a school or residence.

Exceedences of action levels observed during performance of the Community Air Monitoring Plan (CAMP) will be reported to the OER Project Manager and included in the Daily Report.

VOC Monitoring, Response Levels, and Actions

Volatile organic compounds (VOCs) will be monitored at the downwind perimeter of the immediate work area (i.e., the exclusion zone) on a continuous basis during invasive work. Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work will be performed using equipment appropriate to measure the types of contaminants known or suspected to be present. The equipment will be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment will be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities will be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities will resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities will be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities will resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities will be shutdown.

All 15-minute readings must be recorded and be available for OER personnel to review. Instantaneous readings, if any, used for decision purposes will also be recorded.

Particulate Monitoring, Response Levels, and Actions

Particulate concentrations will be monitored continuously at the upwind and downwind perimeters of the exclusion zone at temporary particulate monitoring stations.

The particulate monitoring will be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment will be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration should be visually assessed during all work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m^3) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques will be employed. Work will continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed $150 \text{ mcg}/\text{m}^3$ above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than $150 \text{ mcg}/\text{m}^3$ above the upwind level, work will be stopped and a re-evaluation of activities initiated. Work will resume provided that dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within $150 \text{ mcg}/\text{m}^3$ of the upwind level and in preventing visible dust migration.

All readings will be recorded and be available for OER personnel to review.

5.6 AGENCY APPROVALS

All permits or government approvals required for remedial construction have been or will be obtained prior to the start of remedial construction. Approval of this RAWP by OER does not constitute satisfaction of these requirements and will not be a substitute for any required permit.

5.7 SITE PREPARATION

Pre-Construction Meeting

OER will be invited to attend the pre-construction meeting at the Site with all parties involved in the remedial process prior to the start of remedial construction activities.

Mobilization

Mobilization will be conducted as necessary for each phase of work at the Site. Mobilization includes field personnel orientation, equipment mobilization (including securing all sampling equipment needed for the field investigation), marking/staking sampling locations and utility mark-outs. Each field team member will attend an orientation meeting to become familiar with the general operation of the Site, health and safety requirements, and field procedures.

Utility Marker Layouts, Easement Layouts

The presence of utilities and easements on the Site will be fully investigated prior to the performance of invasive work such as excavation or drilling under this plan by using, at a minimum, the One-Call System (811). Underground utilities may pose an electrocution, explosion, or other hazard during excavation or drilling activities. All invasive activities will be performed in compliance with applicable laws and regulations to assure safety. Utility companies and other responsible authorities will be contacted to locate and mark the locations, and a copy of the Markout Ticket will be retained by the contractor prior to the start of drilling, excavation or other invasive subsurface operations. Overhead utilities may also be present within the anticipated work zones. Electrical hazards associated with drilling in the vicinity of overhead utilities will be prevented by maintaining a safe distance between overhead power lines and drill rig masts.

Proper safety and protective measures pertaining to utilities and easements, and compliance with all laws and regulations will be employed during invasive and other work contemplated under this RAWP. The integrity and safety of on-Site and off-Site structures will be maintained during all invasive, excavation or other remedial activity performed under the RAWP.

Equipment and Material Staging

Equipment and materials will be stored and staged in a manner that complies with applicable laws and regulations. The location of proposed equipment and material staging areas, truck inspection station, stockpile areas, and other pertinent remedial management features will be decided on and managed by the construction manager for the Site. Updates regarding this information will be forwarded to the OER.

Stabilized Construction Entrance

Steps will be taken to ensure that trucks departing the site will not track soil, fill or debris off-Site. Such actions may include use of cleaned asphalt or concrete roads or use of stone or other aggregate-based egress paths between the truck inspection station and the property exit. Measures will be taken to ensure that adjacent roadways will be kept clean of project related soils, fill and debris.

Truck Inspection Station

An outbound-truck inspection station will be set up close to the Site exit. Before exiting the NYC VCP Site, trucks will be required to stop at the truck inspection station and will be examined for evidence of contaminated soil on the undercarriage, body, and wheels. Soil and debris will be removed. Brooms, shovels and potable water will be utilized for the removal of soil from vehicles and equipment, as necessary.

5.8 TRAFFIC CONTROL

Drivers of trucks leaving the NYC VCP Site with soil/fill will be instructed to proceed without stopping in the vicinity of the site to prevent neighborhood impacts. The planned route on local roads for trucks leaving the site will be planned by the construction manager for the Site and reported to OER.

5.9 DEMOBILIZATION

Demobilization will include:

- As necessary, restoration of temporary access areas and areas that may have been disturbed to accommodate support areas (e.g., staging areas, decontamination areas, storage areas, temporary water management areas, and access area);
- Removal of sediment from erosion control measures and truck wash and disposal of materials in accordance with applicable laws and regulations;
- Equipment decontamination, and;
- General refuse disposal.

Equipment will be decontaminated and demobilized at the completion of all field activities. Investigation equipment and large equipment (e.g., soil excavators) will be washed at the truck inspection station as necessary. In addition, all investigation and remediation derived waste will be appropriately disposed.

5.10 REPORTING AND RECORD KEEPING

Daily Reports

Daily reports providing a general summary of activities for each day of *active remedial work* will be emailed to the OER Project Manager by the end of the following day. Those reports will include:

- Project number and statement of the activities and an update of progress made and locations of work performed;
- Quantities of material imported and exported from the Site;
- Status of on-Site soil/fill stockpiles;
- A summary of all citizen complaints, with relevant details (basis of complaint; actions taken; etc.);
- A summary of CAMP excursions, if any;
- Photograph of notable Site conditions and activities.

The frequency of the reporting period may be revised in consultation with OER project manager based on planned project tasks. Daily email reports are not intended to be the primary

mode of communication for notification to OER of emergencies (accidents, spills), requests for changes to the RAWP or other sensitive or time critical information. However, such information will be included in the daily reports. Emergency conditions and changes to the RAWP will be communicated directly to the OER project manager by personal communication. Daily reports will be included as an Appendix in the Remedial Action Report.

Record Keeping and Photo-Documentation

Job-site record keeping for all remedial work will be performed. These records will be maintained on-Site during the project and will be available for inspection by OER staff. Representative photographs will be taken of the Site prior to any remedial activities and during major remedial activities to illustrate remedial program elements and contaminant source areas. Photographs will be submitted at the completion of the project in the RAR in digital format (i.e. jpeg files).

5.11 COMPLAINT MANAGEMENT

All complaints from citizens will be promptly reported to OER. Complaints will be addressed and outcomes will also be reported to OER in daily reports. Notices to OER will include the nature of the complaint, the party providing the complaint, and the actions taken to resolve any problems.

5.12 DEVIATIONS FROM THE REMEDIAL ACTION WORK PLAN

All changes to the RAWP will be reported to the OER Project Manager and will be documented in daily reports and reported in the Remedial Action Report. The process to be followed if there are any deviations from the RAWP will include a request for approval for the change from OER noting the following:

- Reasons for deviating from the approved RAWP;
- Effect of the deviations on overall remedy; and
- Determination that the remedial action with the deviation(s) is protective of public health and the environment.

5.13 DATA USABILITY SUMMARY REPORT

The primary objective of a Data Usability Summary Report (DUSR) is to determine whether or not data meets the site specific criteria for data quality and data use. The DUSR provides an evaluation of analytical data without third party data validation. The DUSR for post-remedial samples collected during implementation of this RAWP will be included in the Remedial Action Report (RAR).

6.0 REMEDIAL ACTION REPORT

A Remedial Action Report (RAR) will be submitted to OER following implementation of the remedial action defined in this RAWP. The RAR will document that the remedial work required under this RAWP has been completed and has been performed in compliance with this plan. The RAR will include:

- Information required by this RAWP;
- As-built drawings for all constructed remedial elements, required certifications, manifests and other written and photographic documentation of remedial work performed under this remedy;
- Site Management Plan;
- Description of any changes in the remedial action from the elements provided in this RAWP and associated design documents;
- Tabular summary of all end point sampling results and all material characterization results, QA/QC results for end-point sampling, and other sampling and chemical analysis performed as part of the remedial action and DUSR;
- Test results or other evidence demonstrating that remedial systems are functioning properly;
- Account of the source area locations and characteristics of all contaminated material removed from the Site including a map showing source areas;
- Account of the disposal destination of all contaminated material removed from the Site. Documentation associated with disposal of all material will include transportation and disposal records, and letters approving receipt of the material.
- Account of the origin and required chemical quality testing for material imported onto the Site.
- Recorded Declaration of Covenants and Restrictions.
- Reports and supporting material will be submitted in digital form.

Remedial Action Report Certification

The following certification will appear in front of the Executive Summary of the Remedial Action Report. The certification will include the following statements:

I, Shaik A. Saad, am currently a professional engineer licensed by the State of New York. I had primary direct responsibility for implementation of the remedial program for the Site name Site Site number.

I certify that the OER-approved Remedial Action Work Plan dated February 10 2012 and Stipulations in a letter dated month day, year; if any were implemented and that all requirements in those documents have been substantively complied with. I certify that contaminated soil, fill, liquids or other material from the property were taken to facilities licensed to accept this material in full compliance with applicable laws and regulations.

7.0 SCHEDULE

The table below presents a schedule for the proposed remedial action and reporting. If the schedule for remediation and development activities changes, it will be updated and submitted to OER. Currently, a 2 month remediation period is anticipated.

Schedule Milestone	Weeks from Remedial Action Start	Duration (weeks)
OER Approval of RAWP		4
Fact Sheet 2 announcing start of remedy		0
Mobilization		1
Remedial Excavation		4
Vapor Barrier Installation		2
Construction		72
Submit Remedial Action Report		3

FIGURES



HYDRO TECH ENVIRONMENTAL CORP.


MAN OFFICE:
77 ARKAT DRIVE, SUITE G
HAUPPAUGE, NEW YORK 11788
T (631)462-5866 F (631)462-5877
www.hydrotechenvironmental.com

NYC OFFICE:
15 OCEAN AVENUE, 2nd Floor
BROOKLYN, NEW YORK 11225
T (718)636-0900 F (718)636-0900
www.hydrotechenvironmental.com

126 North 6th Street
Brooklyn, NY
HTE Job# 110190

Drawn By:	C.O.	TITLE:
Reviewed By:	M.R.	
Approved By:	M.S.	
Date:	01/23/12	
Scale:	AS NOTED	

FIGURE 1: SITE LOCATION MAP

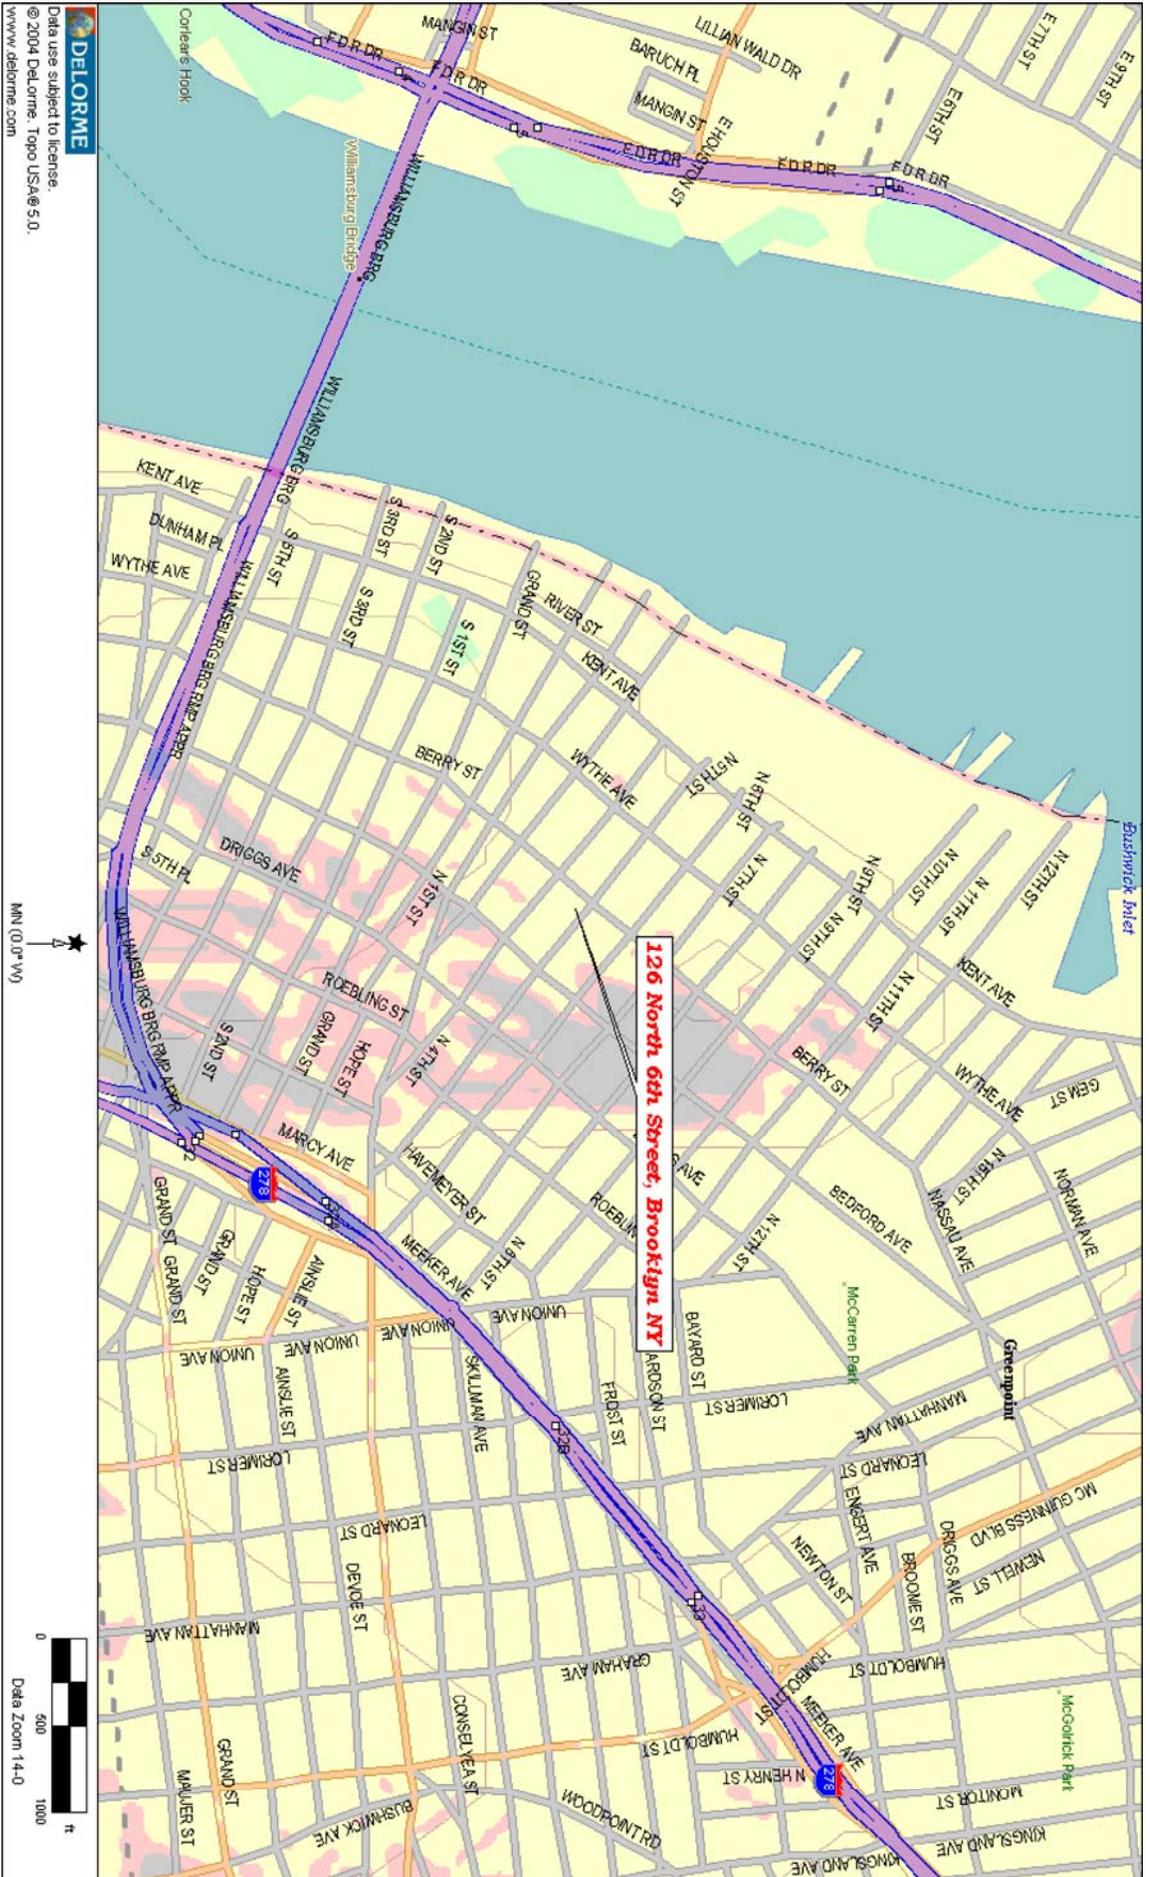



ADJACENT 1-STORY
COMMERCIAL

ADJACENT 2-STORY
COMMERCIAL/ RESIDENTIAL

ADJACENT 1-STORY
COMMERCIAL

**VACANT
LOT**

SIDEWALK

NORTH 6TH STREET

ADJACENT 1-STORY
RESIDENTIAL



HYDRO TECH ENVIRONMENTAL CORP.



MAIN OFFICE:
77 ARKAY DRIVE, SUITE G
HAUPPAUGE, NEW YORK 11788
T (631)462-5866 F (631)462-5877
www.hydrotechenvironmental.com

NYC OFFICE:
15 OCEAN AVENUE, 2nd Floor
BROOKLYN, NEW YORK 11225
T (718)693-0980 F (718)636-0900

126 North 6th Street
Brooklyn, NY.
HTE Job# 110190

Drawn By:	CQ
Reviewed By:	MR
Approved By:	MS
Date:	08/31/11
Scale:	AS NOTED

TITLE:

FIGURE 2: SITE BOUNDARY MAP



ADJACENT 1-STORY
COMMERCIAL

ADJACENT 2-STORY
COMMERCIAL/ RESIDENTIAL

AREA OR
PROPOSED
CELLAR

ADJACENT 1-STORY
COMMERCIAL

SIDEWALK

NORTH 6TH STREET

ADJACENT 1-STORY
RESIDENTIAL



HYDRO TECH ENVIRONMENTAL CORP.

MAN OFFICE:

77 ARKAY DRIVE, SUITE G
HAUPPAUGE, NEW YORK 11788
T (631)462-5866 F (631)462-5877

NYC OFFICE:

15 OCEAN AVENUE, 2nd Floor
BROOKLYN, NEW YORK 11225
T (718)638-0900 F (718)638-0900

www.hydrotechenvironmental.com

126 North 6th Street
Brooklyn, NY
HTE Job # 110190

TITLE:

FIGURE 3: PROPOSED REDEVELOPMENT PLAN

Drawn By:	C.Q.
Reviewed By:	M.R.
Approved By:	M.S.
Date:	01/23/12
Scale:	AS NOTED



APPENDICES

APPENDIX 1

CITIZEN PARTICIPATION PLAN

The NYC Office of Environmental Remediation and 114 N Sixth Realty Corp. have established this Citizen Participation Plan because the opportunity for citizen participation is an important component of the NYC Voluntary Cleanup Program. This Citizen Participation Plan describes how information about the project will be disseminated to the Community during the remedial process. As part of its obligations under the NYC VCP, 114 N Sixth Realty Corp. will maintain a repository for project documents and provide public notice at specified times throughout the remedial program. This Plan also takes into account potential environmental justice concerns in the community that surrounds the project Site. Under this Citizen Participation Plan, project documents and work plans are made available to the public in a timely manner. Public comment on work plans is strongly encouraged during public comment periods. Work plans are not approved by the NYC Office of Environmental Remediation (OER) until public comment periods have expired and all comments are formally reviewed. An explanation of cleanup plans in the form of a public meeting or informational session is available upon request to OER's project manager assigned to this Site, Hannah Moore, who can be contacted about these issues or any others questions, comments or concerns that arise during the remedial process at (212) 442-6372.

Project Contact List. OER has established a Site Contact List for this project to provide public notices in the form of fact sheets to interested members of the Community. Communications will include updates on important information relating to the progress of the cleanup program at the Site as well as to request public comments on the cleanup plan. The Project Contact List includes owners and occupants of adjacent buildings and homes, principal administrators of nearby schools, hospitals and day care centers, the public water supplier that serves the area, established document repositories, the representative Community Board, City Council members, other elected representatives and any local Brownfield Opportunity Area (BOA) grantee organizations. Any member of the public or organization will be added to the Site Contact List on request.

A copy of the Site Contact List is maintained by OER's project manager. If you would like to be added to the Project Contact List, contact NYC OER at (212) 788-8841 or by email at brownfields@cityhall.nyc.gov.

Repositories. A document repository is maintained in the nearest public library that maintains evening and weekend hours. This document repository is intended to house, for community review, all principal documents generated during the cleanup program including Remedial Investigation plans and reports, Remedial Action work plans and reports, and all public notices and fact sheets produced during the lifetime of the remedial project. 114 N Sixth Realty Corp. will inspect the repositories to ensure that they are fully populated with project information. The repository for this project is:

Brooklyn Public Library – Leonard Branch

81 Devoe Street, Brooklyn, NY 11211

(718) 486-3365

Call for hours of operation.

Digital Documentation. NYC OER strongly encourages the use of digital documents in repositories as a means of minimizing paper use while also increasing convenience in access and ease of use.

Public Notice and Public Comment. Public notice to all members of the Project Contact List is required at three major steps during the performance of the cleanup program (listed below) and at other points that may be required by OER. Notices will include Fact Sheets with descriptive project summaries, updates on recent and upcoming project activities, repository information, and important phone and email contact information. All notices will be prepared by Hydro Tech Environmental Corp, reviewed and approved by OER prior to distribution and mailed by Hydro Tech Environmental Corp.

Public comment is solicited in public notices for all work plans developed under the NYC Voluntary Cleanup Program. Final review of all work plans by OER will consider all public comments. Approval will not be granted until the public comment period has been completed.

Citizen Participation Milestones. Public notice and public comment activities occur at several steps during a typical NYC VCP project. See flow chart on the following page, which identifies when during the NYC VCP public notices are issued: These steps include:

- **Public Notice of the availability of the Remedial Investigation Report and Remedial Action Work Plan and a 30-day public comment period on the Remedial Action Work Plan.**

Public notice in the form of a Fact Sheet is sent to all parties listed on the Site Contact List announcing the availability of the Remedial Investigation Report and Remedial Action Work Plan and the initiation of a 30-day public comment period on the Remedial Action Work Plan. The Fact Sheet summarizes the findings of the RIR and provides details of the RAWP. The public comment period will be extended an additional 15 days upon public request. A public meeting or informational session will be conducted by OER upon request.

- **Public Notice announcing the approval of the RAWP and the start of remediation**

Public notice in the form of a Fact Sheet is sent to all parties listed on the Site Contact List announcing the approval of the RAWP and the start of remediation.

Public Notice announcing the completion of remediation, designation of Institutional and Engineering Controls and issuance of the Notice of Completion

Public notice in the form of a Fact Sheet is sent to all parties listed on the Site Contact List announcing the completion of remediation, providing a list of all Institutional and Engineering Controls implemented for to the Site and announcing the issuance of the Notice of Completion.

APPENDIX 2

SOIL/MATERIALS MANAGEMENT PLAN

1.1 SOIL SCREENING METHODS

Visual, olfactory and PID soil screening and assessment will be performed under the supervision of a Qualified Environmental Professional and will be reported in the RAR. Soil screening will be performed during invasive work performed during the remedy and development phases prior to issuance of the Notice of Completion.

1.2 STOCKPILE METHODS

Excavated soil from suspected areas of contamination (e.g., hot spots, USTs, drains, etc.) will be stockpiled separately and will be segregated from clean soil and construction materials. Stockpiles will be used only when necessary and will be removed as soon as practicable. While stockpiles are in place, they will be inspected daily, and before and after every storm event. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by OER. Excavated soils will be stockpiled on, at minimum, double layers of 8-mil minimum sheeting, will be kept covered at all times with appropriately anchored plastic tarps, and will be routinely inspected. Broken or ripped tarps will be promptly replaced.

All stockpile activities will be compliant with applicable laws and regulations. Soil stockpile areas will be appropriately graded to control run-off in accordance with applicable laws and regulations. Stockpiles of excavated soils and other materials shall be located at least of 50 feet from the property boundaries, where possible. Hay bales or equivalent will surround soil stockpiles except for areas where access by equipment is required. Silt fencing and hay bales will be used as needed near catch basins, surface waters and other discharge points.

1.3 CHARACTERIZATION OF EXCAVATED MATERIALS

Soil/fill or other excavated media that is transported off-Site for disposal will be sampled in a manner required by the receiving facility, and in compliance with applicable laws and regulations. Soils proposed for reuse on-Site will be managed as defined in this plan.

1.4 MATERIALS EXCAVATION, LOAD-OUT AND DEPARTURE

The PE/QEP overseeing the remedial action will:

- oversee remedial work and the excavation and load-out of excavated material;
- ensure that there is a party responsible for the safe execution of invasive and other work performed under this work plan;
- ensure that Site development activities and development-related grading cuts will not interfere with, or otherwise impair or compromise the remedial activities proposed in this RAWP;
- ensure that the presence of utilities and easements on the Site has been investigated and that any identified risks from work proposed under this plan are properly addressed by appropriate parties;
- ensure that all loaded outbound trucks are inspected and cleaned if necessary before leaving the Site;
- ensure that all egress points for truck and equipment transport from the Site will be kept clean of Site-derived materials during Site remediation.

Locations where vehicles exit the Site shall be inspected daily for evidence of soil tracking off premises. Cleaning of the adjacent streets will be performed as needed to maintain a clean condition with respect to Site-derived materials.

Open and uncontrolled mechanical processing of historical fill and contaminated soil on-Site will not be performed without prior OER approval.

1.5 OFF-SITE MATERIALS TRANSPORT

Loaded vehicles leaving the Site will comply with all applicable materials transportation requirements (including appropriate covering, manifests, and placards) in accordance with applicable laws and regulations, including use of licensed haulers in accordance with 6 NYCRR Part 364. If loads contain wet material capable of causing leakage from trucks, truck liners will be used. Queuing of trucks will be performed on-Site, when possible in order to minimize off Site disturbance. Off-Site queuing will be minimized.

Outbound truck transport routes will be determined by the construction manager for the site and reported to OER prior to the start of construction. This routing will take into account the following factors: (a) limiting transport through residential areas and past sensitive sites; (b) use of mapped truck routes; (c) minimizing off-Site queuing of trucks entering the facility; (d) limiting total distance to major highways; (e) promoting safety in access to highways; and (f) overall safety in transport. To the extent possible, all trucks loaded with Site materials will travel from the Site using these truck routes. Trucks will not stop or idle in the neighborhood after leaving the project Site.

1.6 MATERIALS DISPOSAL OFF-SITE

The following documentation will be established and reported by the PE/QEP for each disposal destination used in this project to document that the disposal of regulated material exported from the Site conforms with applicable laws and regulations: (1) a letter from the PE/QEP or Enrollee to each disposal facility describing the material to be disposed and requesting written acceptance of the material. This letter will state that material to be disposed is regulated material generated at an environmental remediation Site in Brooklyn, New York under a governmental remediation program. The letter will provide the project identity and the name and phone number of the PE/QEP or Enrollee. The letter will include as an attachment a summary of all chemical data for the material being transported; and (2) a letter from each disposal facility stating it is in receipt of the correspondence (1, above) and is approved to accept the material. These documents will be included in the RAR.

The Remedial Action Report will include an itemized account of the destination of all material removed from the Site during this remedial action.

Documentation associated with disposal of all material will include records and approvals for receipt of the material. This information will be presented in the RAR.

All impacted soil/fill or other waste excavated and removed from the Site will be managed as regulated material and will be disposed in accordance with applicable laws and regulations. Historic fill and contaminated soils taken off-Site will be handled as solid waste and will not be disposed at a Part 360-16 Registration Facility (also known as a Soil Recycling Facility).

Waste characterization will be performed for off-Site disposal in a manner required by the receiving facility and in conformance with its applicable permits. Waste characterization sampling and analytical methods, sampling frequency, analytical results and QA/QC will be reported in the RAR. A manifest system for off-Site transportation of exported materials will be employed. Manifest information will be reported in the RAR. Hazardous wastes derived from on-Site will be stored, transported, and disposed of in compliance with applicable laws and regulations.

1.7 MATERIALS REUSE ON-SITE

No material is expected to be reused onsite. Soil and fill that is derived from the property that meets the soil cleanup objectives established in this plan may be reused on-Site. The soil cleanup objectives for on-Site reuse are listed in Section 4.2. ‘Reuse on-Site’ means material that is excavated during the remedy or development, does not leave the property, and is relocated within the same property and on comparable soil/fill material, and addressed pursuant to the NYC VCP agreement subject to Engineering and Institutional Controls. The PE/QEP will ensure that reused materials are segregated from other materials to be exported from the Site and that procedures defined for material reuse in this RAWP are followed.

Organic matter (wood, roots, stumps, etc.) or other waste derived from clearing and grubbing of the Site will not be buried on-Site. Soil or fill excavated from the site for grading or other purposes will not be reused within a cover soil layer or within landscaping berms.

1.8 DEMARCATION

After completion of hotspot removal and any other invasive remedial activities, and prior to backfilling, the top of the residual soil/fill will be defined by one of three methods: (1) placement of a demarcation layer. The demarcation layer will consist of geosynthetic fencing or equivalent material to be placed on the surface of residual soil/fill to provide an observable reference layer. A description or map of the approximate depth of the demarcation layer will be provided in the SMP; or (2) a land survey of the top elevation of residual soil/fill before the placement of cover soils, pavement and associated sub-soils, or other materials or structures or, (3) all materials beneath the approved cover will be considered impacted and subject to site management after the

remedy is complete. Demarcation may be established by one or any combination of these three methods. As appropriate, a map showing the method of demarcation for the Site and all associated documentation will be presented in the RAR.

This demarcation will constitute the top of the site management horizon. Materials within this horizon require adherence to special conditions during future invasive activities as defined in the Site Management Plan.

1.9 IMPORT OF BACKFILL SOIL FROM OFF-SITE SOURCES

This Section presents the requirements for imported fill materials to be used below the cover layer and within the clean soil cover layer. All imported soils will meet OER-approved backfill and cover soil quality objectives for this Site.

A process will be established to evaluate sources of backfill and cover soil to be imported to the Site, and will include an examination of source location, current and historical use(s), and any applicable documentation. Material from industrial sites, spill sites, environmental remediation sites or other potentially contaminated sites will not be imported to the Site.

The following potential sources may be used pending attainment of backfill and cover soil quality objectives:

- Clean soil from construction projects at non-industrial sites in compliance with applicable laws and regulations;
- Clean soil from roadway or other transportation-related projects in compliance with applicable laws and regulations;
- Clean recycled concrete aggregate (RCA) from facilities permitted or registered by the regulations of NYS DEC.

All materials received for import to the Site will be approved by a PE/QEP and will be in compliance with provisions in this RAWP. The RAR will report the source of the fill, evidence that an inspection was performed on the source, chemical sampling results, frequency of testing, and a Site map indicating the locations where backfill or soil cover was placed.

Source Screening and Testing

Inspection of imported fill material will include visual, olfactory and PID screening for evidence of contamination. Materials imported to the Site will be subject to inspection, as follows:

- Trucks with imported fill material will be in compliance with applicable laws and regulations and will enter the Site at designated locations;
- The PE/QEP is responsible to ensure that every truck load of imported material is inspected for evidence of contamination; and
- Fill material will be free of solid waste including pavement materials, debris, stumps, roots, and other organic matter, as well as ashes, oil, perishables or foreign matter.

Composite samples of imported material will be taken at a minimum frequency of one sample for every 500 cubic yards of material. Once it is determined that the fill material meets imported backfill or cover soil chemical requirements and is non-hazardous, and lacks petroleum contamination, the material will be loaded onto trucks for delivery to the Site.

Recycled concrete aggregate (RCA) will be imported from facilities permitted or registered by NYSDEC. Facilities will be identified in the RAR. A PE/QEP is responsible to ensure that the facility is compliant with 6NYCRR Part 360 registration and permitting requirements for the period of acquisition of RCA. RCA imported from compliant facilities will not require additional testing, unless required by NYSDEC under its terms for operation of the facility. RCA imported to the Site must be derived from recognizable and uncontaminated concrete. RCA material is not acceptable for, and will not be used as cover material.

1.10 FLUIDS MANAGEMENT

All liquids to be removed from the Site, including dewatering fluids, will be handled, transported and disposed in accordance with applicable laws and regulations. Liquids discharged into the New York City sewer system will receive prior approval by New York City Department of Environmental Protection (NYC DEP). The NYC DEP regulates discharges to the New York City sewers under Title 15, Rules of the City of New York Chapter 19. Discharge to the New York City sewer system will require an authorization and sampling data demonstrating that the

groundwater meets the City's discharge criteria. The dewatering fluid will be pretreated as necessary to meet the NYC DEP discharge criteria. If discharge to the City sewer system is not appropriate, the dewatering fluids will be managed by transportation and disposal at an off-Site treatment facility.

Discharge of water generated during remedial construction to surface waters (i.e. a stream or river) is prohibited without a SPDES permit issued by New York State Department of Environmental Conservation.

1.11 STORM-WATER POLLUTION PREVENTION

Applicable laws and regulations pertaining to storm-water pollution prevention will be addressed during the remedial program. Erosion and sediment control measures identified in this RAWP (silt fences and barriers, and hay bale checks) will be installed around the entire perimeter of the remedial construction area and inspected once a week and after every storm event to ensure that they are operating appropriately. Discharge locations will be inspected to determine whether erosion control measures are effective in preventing significant impacts to receptors. Results of inspections will be recorded in a logbook and maintained at the Site and available for inspection by OER. All necessary repairs shall be made immediately. Accumulated sediments will be removed as required to keep the barrier and hay bale check functional.

Undercutting or erosion of the silt fence toe anchor will be repaired immediately with appropriate backfill materials. Manufacturer's recommendations will be followed for replacing silt fencing damaged due to weathering.

1.12 CONTINGENCY PLAN

This contingency plan is developed for the remedial construction to address the discovery of unknown structures or contaminated media during excavation. Identification of unknown contamination source areas during invasive Site work will be promptly communicated to OER's Project Manager. Petroleum spills will be reported to the NYS DEC Spill Hotline. These findings will be included in the daily report. If previously unidentified contaminant sources are found during on-Site remedial excavation or development-related excavation, sampling will be performed on contaminated source material and surrounding soils and reported to OER.

Chemical analytical testing will be performed for TAL metals, TCL volatiles and semi-volatiles, TCL pesticides and PCBs, as appropriate.

1.13 ODOR, DUST AND NUISANCE CONTROL

Odor Control

All necessary means will be employed to prevent on- and off-Site odor nuisances. At a minimum, procedures will include: (a) limiting the area of open excavations; (b) shrouding open excavations with tarps and other covers; and (c) use of foams to cover exposed odorous soils. If odors develop and cannot otherwise be controlled, additional means to eliminate odor nuisances will include: (d) direct load-out of soils to trucks for off-Site disposal; and (e) use of chemical odorants in spray or misting systems.

This odor control plan is capable of controlling emissions of nuisance odors. If nuisance odors are identified, work will be halted and the source of odors will be identified and corrected. Work will not resume until all nuisance odors have been abated. OER will be notified of all odor complaint events. Implementation of all odor controls, including halt of work, will be the responsibility of the PE/QEP's certifying the Remedial Action Report.

Dust Control

Dust management during invasive on-Site work will include, at a minimum:

- Use of a dedicated water spray methodology for roads, excavation areas and stockpiles.
- Use of properly anchored tarps to cover stockpiles.
- Exercise extra care during dry and high-wind periods.
- Use of gravel or recycled concrete aggregate on egress and other roadways to provide a clean and dust-free road surface.

This dust control plan is capable of controlling emissions of dust. If nuisance dust emissions are identified, work will be halted and the source of dusts will be identified and

corrected. Work will not resume until all nuisance dust emissions have been abated. OER will be notified of all dust complaint events. Implementation of all dust controls, including halt of work, will be the responsibility of the PE/QEP's responsible for certifying the Remedial Action Report.

Other Nuisances

Noise control will be exercised during the remedial program. All remedial work will conform, at a minimum, to NYC noise control standards.

Rodent control will be provided, during Site clearing and grubbing, and during the remedial program, as necessary, to prevent nuisances.